



# GLARELESS NIB SPOT

# GLARELESS PIN SPOT WITH SPRING CLIP

 SINGLE-WHITE

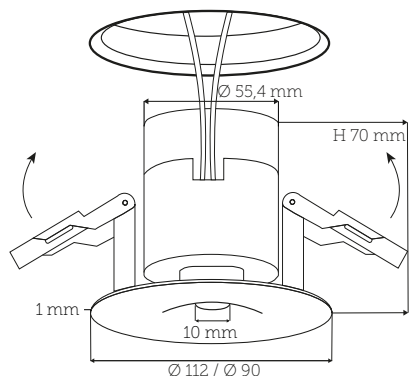

  DUAL-WHITE & RGB+W

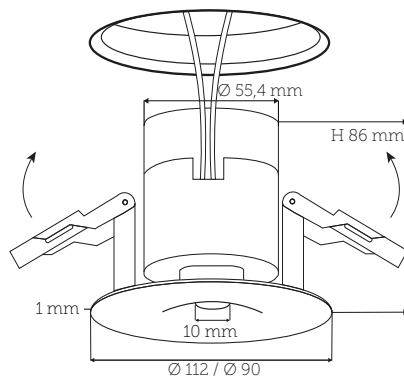

 SPRING CLIP - SINGLE WHITE - 20°/ 40° (2700K)  
DIFFERENT COLOUR TEMPERATURE ON REQUEST (4000K -7500K) ART.  
NR. *G-SW27-20-E-S / G-SW27-40-E-S*


EXTERNAL DRIVER OPTIONS (MAX 4 SPOTS):  
0-10 VOLT, DALI, CASAMBI, DMX

 SPRING CLIP - DUAL WHITE - 20 / 40. (2000K-4000K)  
ART. NR: *G-DW-20-E-S / G-DW-40-E-S*

EXTERNAL DRIVER OPTIONS (MAX 4 SPOTS):  
0-10 VOLT, DALI, CASAMBI, DMX

 SPRING CLIP - DUAL WHITE - 20 / 40. (2000K-4000K)  
POWER SUPPLY: SPOTS INTERNAL DRIVER  
ART. NR: *G-DW-20-C-S / G-DW-40-C-S*  
INTERNAL DRIVER: CASAMBI  
ART. NR: *G-DW-20-D-S / G-DW-40-D-S*

INTERNAL DRIVER: DMX

 SPRING CLIP - RGB+W - 20 / 40 (2700K)  
POWER SUPPLY: SPOTS INTERNAL DRIVER  
ART. NR: *G-RGBW-20-C-S / G-RGBW-40-C-S*  
INTERNAL DRIVER: CASAMBI  
ART. NR: *G-RGBW-20-D-S / G-RGBW-40-D-S*  
INTERNAL DRIVER: DMX

BEAM ANGLE



20° - 40°

LIGHT OUTPUT



500-600 lumen

COLOUR FASTNESS



RA 85-95

ENERGY USAGE



max. 24  
Watt


LIFE SPAN



70% (after  
50.000 hours)

# GLARELESS PIN SPOT

## ADJUSTABLE

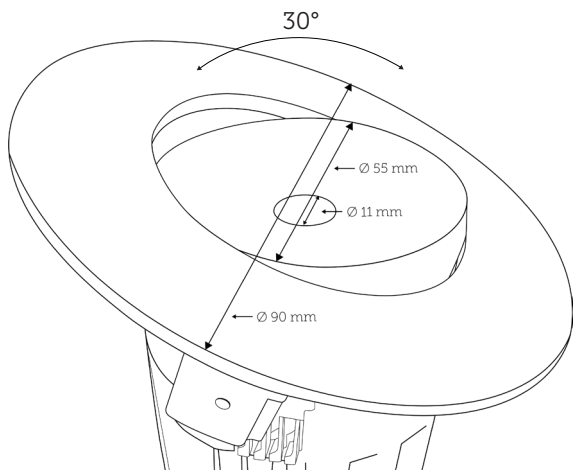

 **ADJUSTABLE - SINGLE WHITE - 20 / 40 (2700K)**  
 DIFFERENT COLOUR TEMPERATURE ON REQUEST (4000K -7500K) *ART. NR.*  
*G-SW27-20-E-ADJ / G-SW27-40-E-ADJ*

EXTERNAL DRIVER OPTIONS (MAX 4 SPOTS):  
 0-10 VOLT, DALI, CASAMBI, DMX

 **ADJUSTABLE - DUAL WHITE - 20 / 40 (2000K-4000K)**  
*ART. NR. GDW-20-E-ADJ / GDW-40-E-ADJ*

EXTERNAL DRIVER OPTIONS (MAX 4 SPOTS):  
 0-10 VOLT, DALI, CASAMBI, DMX

 **ADJUSTABLE - DUAL WHITE - 20 / 40 (2000K-4000K)**

POWER SUPPLY: SPOTS INTERNAL DRIVER

*ART. NR. GDW-20-ADJ / GDW-40-C-ADJ*

INTERNAL DRIVER: CASAMBI

*ART. NR. GDW-20-D-ADJ / GDW-40-D-ADJ*

INTERNAL DRIVER: DMX

 **ADJUSTABLE - RGB+W - 20 / 40 (2700K)**

POWER SUPPLY: SPOTS INTERNAL DRIVER

*ART. NR. G-RGBW-20-C-ADJ / G-RGBW-40-C-ADJ*

INTERNAL DRIVER: CASAMBI

*ART. NR. G-RGBW-20-D-ADJ / G-RGBW-40-D-ADJ*

INTERNAL DRIVER: DMX

BEAM ANGLE



20° - 40°

LIGHT OUTPUT



500-600 lumen

COLOUR FASTNESS



RA 85-95

ENERGY USAGE



max. 24  
Watt


LIFE SPAN



70% (after  
50.000 hours)

# GLARELESS PIN SPOT PLASTER RING

THE GLARELESS PIN  
SPOT WITH PLASTER  
RING IS THE ULTIMATE IN  
MINIMALISM

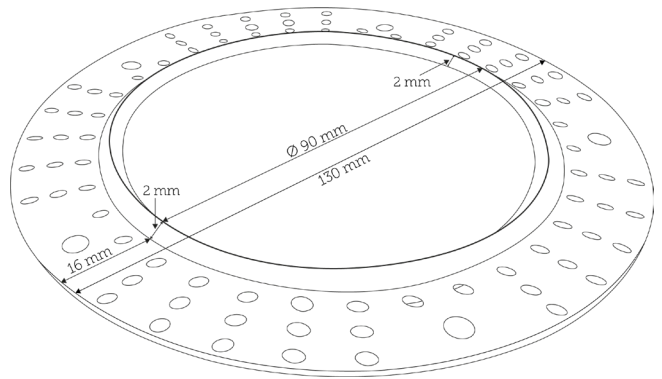

PLASTER RING  
ART. NR: G-PR







