




NEXIA INOX_L

Aluminum Downlight LED.
Square embedment.



15929 -									
Colour	CRI / Temp.	Angle	Led	Regulation	Class				
0 White	G 827	1 15°	2 2 x 1500 lm / 12 W	D Dali	II				
1 Black	C 830	3 36°	3 2 x 2000 lm / 17,5 W						
8 Aluminum	N 840	7 70°	4 2 x 3000 lm / 25 W						
	H 927		5 2 x 4000 lm / 33 W						
	E 930								
F 940									







1700 g	155x310 mm	1	IP 42	30°	CRI<80/90	2-SDCM	230V	DRIVER <5%	50.000 h	LED

DESCRIPTION


Downlights in aluminium. Aluminium reflector with high purity 99,8%. Driver enclosed. High efficiency (+/- 100 Lm/W).

INSTALLATION

Square embedding 155x310mm.

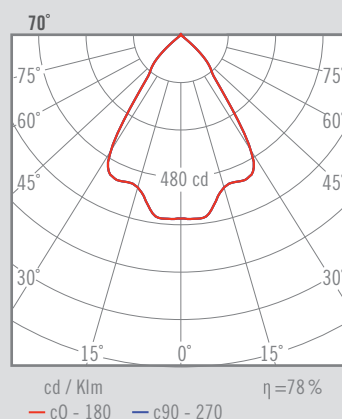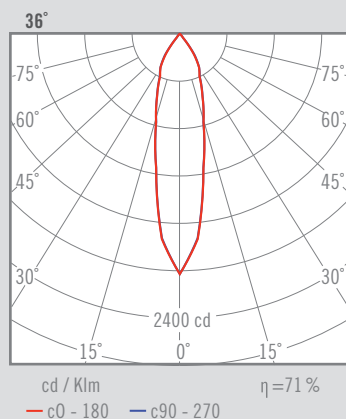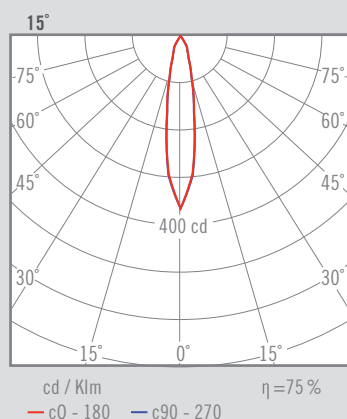


QUALITY CERTIFICATES :





NEXIA INOX_L

Aluminum Downlight LED.
Round embedment.

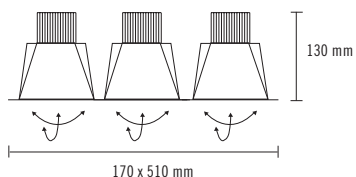

15930 -		Colour	CRI / Temp.	Angle	Led	Regulation	Class			
0	White	G	827	1	15°	2	3 x 1500 lm / 12 W	D	Dali	II
1	Black	C	830	3	36°	3	3 x 2000 lm / 17,5 W			
8	Aluminum	N	840	7	70°	4	3 x 3000 lm / 25 W			
		H	927			5	3 x 4000 lm / 33 W			
		E	930							
		F	940							

2550 g	155x470 mm	1	IP 42	CRI=80/90	2-SDCM	230V	DRIVER <5%	50.000 h	LED







DESCRIPTION

-Downlights in aluminium. Aluminium reflector with high purity 99,8%.
Driver enclosed. High efficiency (+/- 100 Lm/W).


INSTALLATION

-Round embedding for an easier installation.

50.000 h

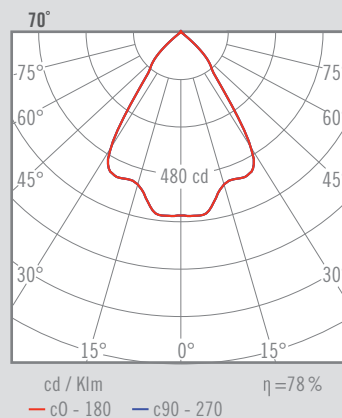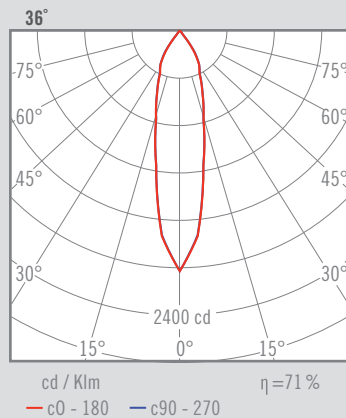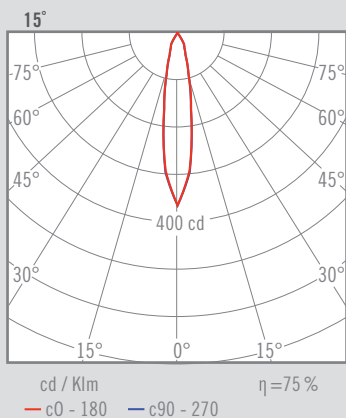


QUALITY CERTIFICATES :





NEXIA INOX_L

Aluminum Downlight LED.
Round embedment.



15932 -						
Colour	CRI / Temp.	Angle	Led	Dimming	Class	
0 White	G 827	9 90°	2 1500 lm / 12 W	D Dali	II	
1 Black	C 830		3 2000 lm / 17,5W			
8 Aluminum	N 840		4 3000 lm / 25 W			
	H 927		5 4000 lm / 33 W			
	E 930					
	F 940					

850 g	153 mm	1	IP 32	CRI=80/90	2-SDCM	230 V	DRIVER <5%	50.000 h	LED	
-------	--------	---	-------	-----------	--------	-------	------------	----------	-----	--



DESCRIPTION

Downlights in aluminium. Aluminium reflector with high purity 99,8%.
Driver enclosed. High efficiency (+/- 100 Lm/W).

Round embedment Ø 153 mm.

INSTALLATION

Round embedding for an easier installation.

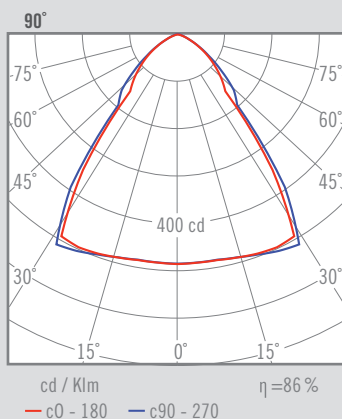

QUALITY CERTIFICATES :

