


POSITION 1



POSITION 2

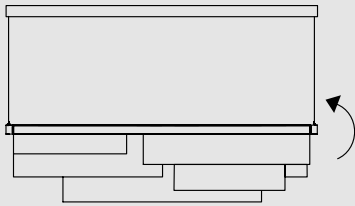

REF.

SKYL S IV/IV LED DIM0-10V
SKYL S IV/GD LED DIM0-10V
SKYL S BK/IV LED DIM0-10V
SKYL S BK/GD LED DIM0-10V
SKYL S BN/IV LED DIM0-10V
SKYL S BN/GD LED DIM0-10V
SKYL S GD/IV LED DIM0-10V
SKYL S GD/GD LED DIM0-10V

REF.

SKYL S IV/IV LED DIMDALI & DIMBT
SKYL S IV/GD LED DIMDALI & DIMBT
SKYL S BK/IV LED DIMDALI & DIMBT
SKYL S BK/GD LED DIMDALI & DIMBT
SKYL S BN/IV LED DIMDALI & DIMBT
SKYL S BN/GD LED DIMDALI & DIMBT
SKYL S GD/IV LED DIMDALI & DIMBT
SKYL S GD/GD LED DIMDALI & DIMBT

LIGHT SOURCE

Class I



Dual Circuit - DC: Enables independent dimming and control of the wood shades and the downlight

120 - 277V: Dimmable 0-10V & DALI
220-240V: Dimmable Bluetooth - BT

Driver:

- CC 700mA &
- CC 700mA

LED Integrated:

Led module 350mA, 690 lm/module
Energy class A*

3000K, CRI90, 50W, 50-60Hz

MATERIALS & COMPONENTS

Multimaterial Shade
Wood Veneer, Perforated Metal & Textured Glass

Metal Structure & Canopy

4 Black Steel Cables: 2 m drop

4 Black Electrified Steel Cables: 2 m drop

FINISHES

WOOD VENEER

20 Ivory White 22 Natural Beech

METAL

*On Request

IV-Matt Ivory *BN-Black Nickel
BK-Matt Black *GD-Gold

PACKAGING

Box Size: 151 × 56 × 18 cm

Box Volume: 0,152 m³

Weight: Gross - 18,9 Kg | Net - 12,3 Kg