




COOLFIN S

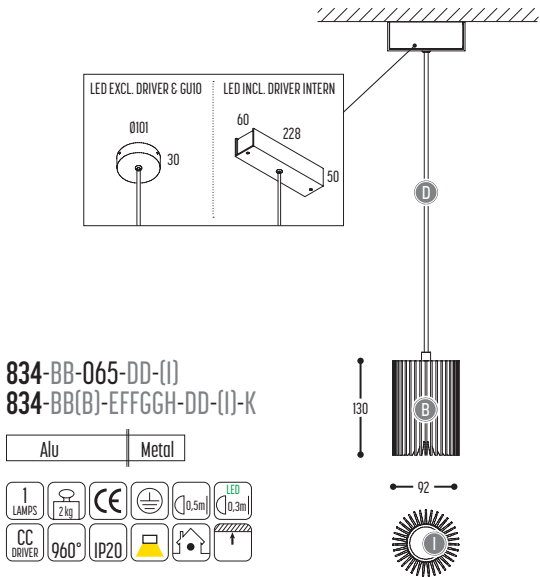


834-BB-065-DD-(I)
834-BB(B)-EFFGGH-DD-(I)-K

Alu Metal



COOLFIN S2

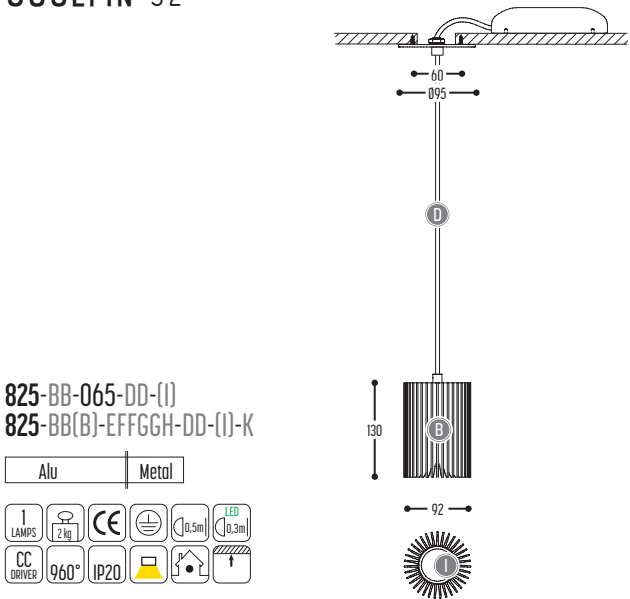

825-BB-065-DD-(I)
825-BB(B)-EFFGGH-DD-(I)-K

Alu Metal



BB			CCC					DD		(I) optional							
COLORS			TYPE					SUSP. CABLE		INSIDE COLOR							
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)		01	1,5 m	G 	Gold point					
03		White							02	2,5 m							
			EFF					GG	H	DD	(I) optional	K					
			CRI • LUMENOUTPUT					REFLECTOR		COLOR TEMP.	SUSP. CABLE	INSIDE COLOR	DRIVER EXTERN				
			LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W			40	40°	2	2700 K	01	1,5 m	G 	Gold point	0	incl./non dim
				820	>80 CRI • 2000 Lm / 700 mA / 15,2 W			60	60°	3	3000 K	02	2,5 m			1	excl.
830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W					4	4000 K				2	Dim 1-10 V					
913	>95 CRI • 1300 Lm / 700 mA / 13,3 W									3	Dali						

COOLFIN 3P

992-BB-065-DD-(I)
992-BB-EFFGGH-DD-(I)-K

Alu Metal

3 LAMPS

6 kg

CE


0,5m

LED 0,3m

CC DRIVER

960°

IP20

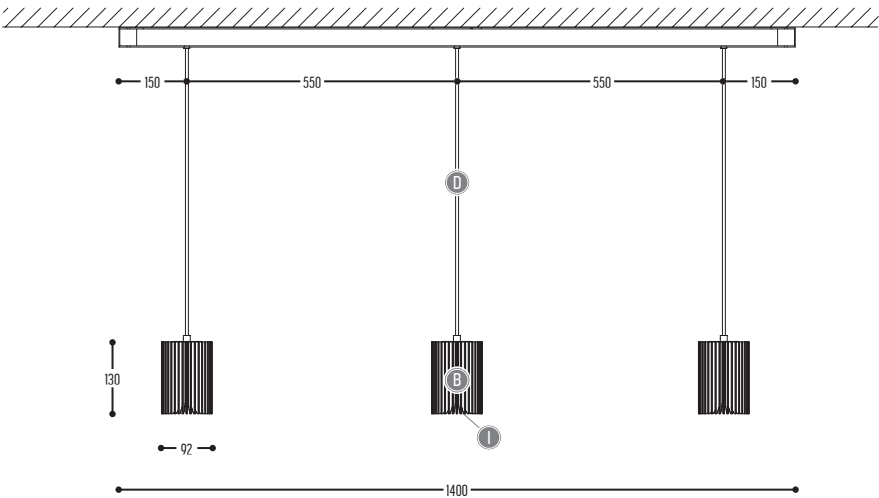

BB		CCC					DD	(I) optional						
COLORS		TYPE					SUSP. CABLE	INSIDE COLOR						
02			065		QPAR51 (MAX 50 W)		01	1,5 m	Gold paint					
03						LED (MAX 7,5 W)		02		2,5 m				
		EFF				GG	H	DD	(I) optional	K				
		CRI • LUMENOUTPUT			REFLECTOR	COLOR TEMP.	SUSP. CABLE	INSIDE COLOR	DRIVER					
		LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W		40	40°	2	2700 K	01	1,5 m	Gold paint	0	incl./non dim
			820	>80 CRI • 2000 Lm / 700 mA / 15,2 W		60	60°	3	3000 K	02	2,5 m		1	excl.
			830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W				4	4000 K				2	Dim 1-10 V
			913	>95 CRI • 1300 Lm / 700 mA / 13,3 W									3	Dali




COOLFIN



830-BB-065-00-(I)
830-BB-EFFGGH-00-(I)-K

Alu Metal

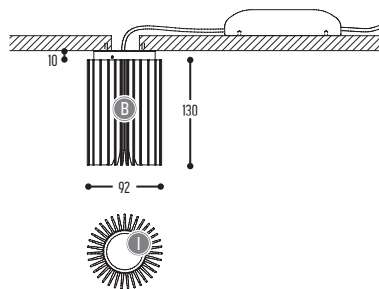


COOLFIN MOVE



829-BB-065-00-(I)
829-BB-EFFGGH-00-(I)-K

Alu Metal

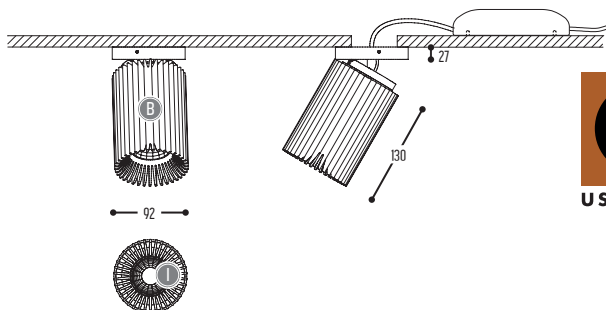

USA 2014

BB			CCC						(I) optional								
COLORS			TYPE						INSIDE COLOR								
02		Black		065	GU10		QPAR51 (MAX 50 W)			G		Gold paint					
03		White					LED (MAX 7,5 W)										
			EFF			GG		H		(I) optional			K				
			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER EXTERN				
LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W			40	40°	2	2700 K	G		Gold paint	0	incl./non dim				
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W			60	60°	3	3000 K				1	excl.				
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W					4	4000 K				2	Dim 1-10 V				
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W										3	Dali				

COOLFIN SET1




832-BB-065-00-(I)
832-BB-EFFGGH-00-(I)-K


Alu Metal



FRONTPLATE CUT OUT
Ø 160 mm

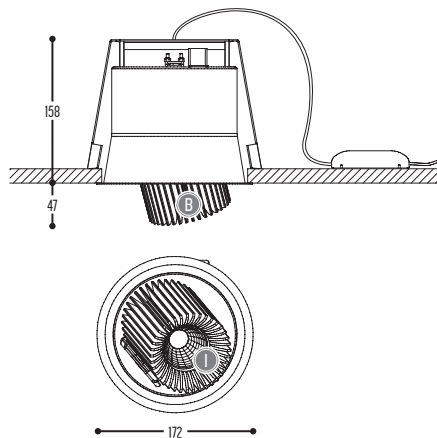

COOLFIN SET2


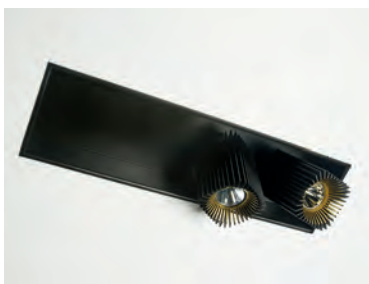


833-BB-065-00-(I)
833-BB-EFFGGH-00-(I)-K


Alu Metal



FRONTPLATE CUT OUT
565 x 148 mm

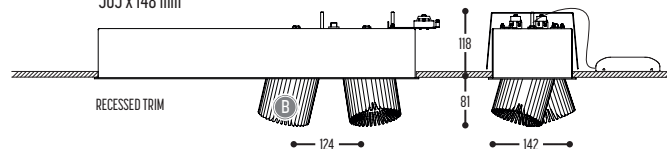

COOLFIN BOX2

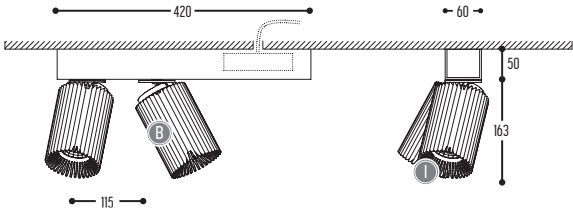

826-BB-065-00-(I)
826-BB-EFFGGH-00-(I)-K


Alu Metal



BB			CCC					(I) optional					
COLORS			TYPE					INSIDE COLOR					
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)		G		Gold paint		
03		White											
									LED (MAX 7,5 W)				
EFF					GG		H		(I) optional		K		
CRI • LUMENOUTPUT					REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER EXTERN		
LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W			40	40°	2	2700 K	G		Gold paint	0	incl./non dim
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W			60	60°	3	3000 K				1	excl.
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W					4	4000 K			2	Dim 1-10 V	
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W									3	Dali	



COOLFIN JR. BOX1

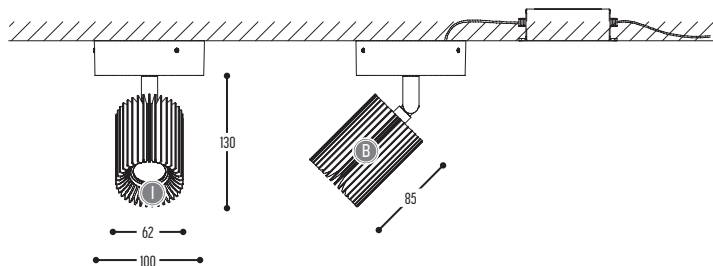

1386-02-EFFGGH-00-(I)-K

Alu

Metal

1 LAMPS

1 kg

CE

III

CC DRIVER

960°

360°

80°

IP20

BB		EFF				GG		H		(I) optional		K	
COLORS		CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER	
02	 Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W		30	30°	2	2700 K	G	 Gold paint	0	incl./non dim
	907		>90 CRI • 740 Lm / 350 mA / 9,6 W		40	40°	3	3000 K	1			excl.	
					54	54°			2			Dim 1-10 V (extern)	
									3			Dali (extern)	
												4	Phase cut

COOLFIN JR.



840-02-EFFGGH-00-(I)-K

Alu

Metal

1 LAMPS

1,5 kg


CE

III

CC DRIVER

960°

IP20

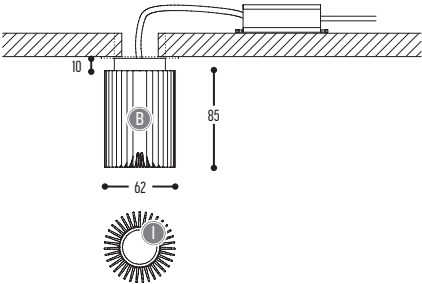

interior
innovation
award
2015

Selection

COOLFIN JR. SET1



1385-02-EFFGGH-00-(I)-K

Alu

Metal

1 LAMPS

1 kg

CE

III


CC DRIVER

960°

360°


80°

IP20

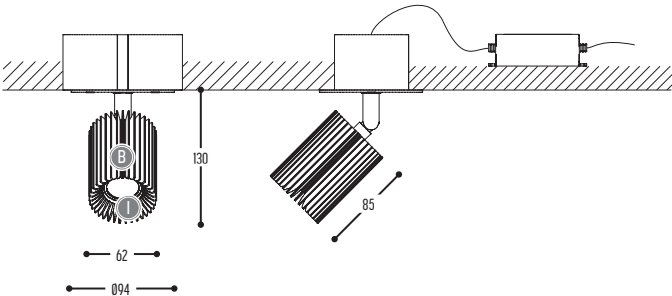

BB			EFF			GG		H		(I) optional		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER EXTERN	
02		Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W	30	30°	2	2700 K	G	 Gold paint	0	incl./non dim
				907	>90 CRI • 740 Lm / 350 mA / 9,6 W	40	40°	3	3000 K			1	excl.
						54	54°					2	Dim 1-10 V
												3	Dali
												4	Phase cut

COOLFIN JR. SET2

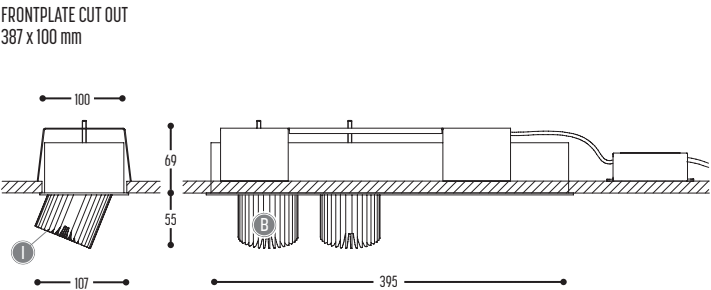

841-02-EFFGGH-00-(I)-K

Alu

Metal

2 LAMPS

2 kg

CE

III

CC DRIVER


960°

365°

20°

IP40

COOLFIN JR. BOX2

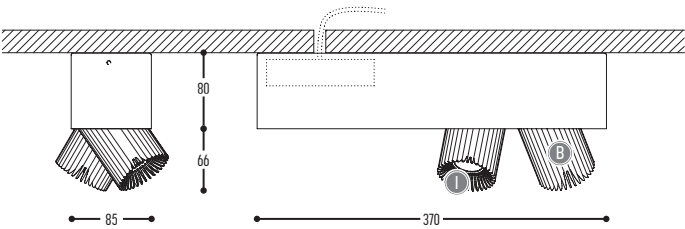

843-02-EFFGGH-00-(I)-K

Alu

Metal

2 LAMPS

2 kg

CE

III

CC DRIVER

960°


365°

20°

IP40

BB		EFF				GG		H		(I) optional		K	
COLORS		CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER EXTERN	
02	 Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W		30	30°	2	2700 K	G  Gold paint	0	incl./non dim	
	907		>90 CRI • 740 Lm / 350 mA / 9,6 W		40	40°	3	3000 K	1			excl.	
			54	54°			2	Dim 1-10 V					
							3	Dali					
												4	Phase cut


COOLFIN TRACK1

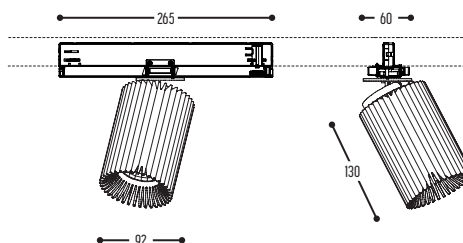

TRACK RAIL: to be ordered separately - check compatibility
Non dim. compatible with Eutrac / Global / Powergear
Dim. compatible with Global / Powergear

827-BB-EFFGGH-00-(I)-K

Alu Metal



BB		EFF				GG		H		[I] optional		K	
COLORS		CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER	
02	 Black	LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W		40	40°	2	2700 K	G	 Gold paint	0	incl./non dim
03	 White		820	>80 CRI • 2500 Lm / 850 mA / 18 W		60	60°	3	3000 K		3	Dali	
			913	>95 CRI • 1300 Lm / 700 mA / 13.3 W				4	4000 K				