

Li

Arturo Álvarez, 2013

p. 40

MATERIAL
MATERIAL

Pressed cellulose
Celulosa prensada

- FINISHES
ACABADOS
- | | | | |
|----|---|----|---|
| 42 |  | 49 |  |
| 43 |  | 50 |  |
| 46 |  | 51 |  |
| 47 |  | 52 |  |

SUPPORT
SOPORTE

Stainless steel
Acero inoxidable


MOUNTING OPTIONS
OPCIONES DE INSTALACIÓN

Wall lamp
Aplique

KT06G-LD

LED

ADA CE UK CA CCC

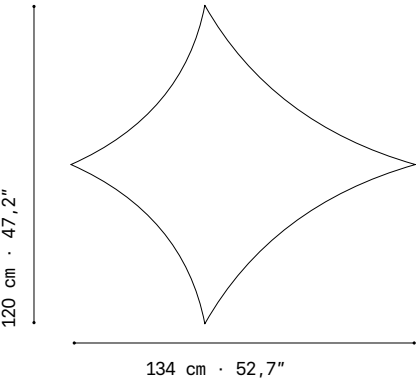

120 cm · 47,2"

134 cm · 52,7"

Depth · Profundidad
9 cm | 3,5"

LIGHT SOURCE
FUENTE DE LUZ

Light source built in
Fuente de luz incluida

230 V | 50 Hz

34W | 2700K | 7272lm built in
upon request 3000K 7560lm
Dimmer: PHASE CUT

100~277 V |
60 Hz

34W | 2700K | 7272lm built in
upon request 3000K 7560lm
Dimmer: PHASE CONTROL & 0-10V
(only 120Vac TRIAC Dimmers)

NET WEIGHT
PESO NETO

7,5 kg | 16,5 lb


PACKAGING
EMBALAJE

102x102x13 cm | 40,1x40,1x5,1"
11 kg | 24,2 lb

LI06

LED

ADA CE UK CA CCC

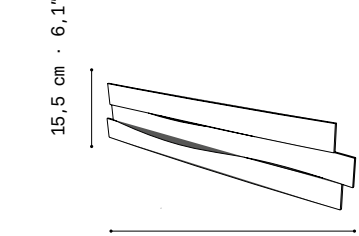

15,5 cm · 6,1"

51,5 cm · 20,3"

Depth · Profundidad
6,5 cm | 2,6"

LIGHT SOURCE
FUENTE DE LUZ

Light source built in
Fuente de luz incluida

230 V | 50 Hz

11,8W | 2700K | 1604lm built in
upon request 3000K 1654lm
Dimmer: PHASE CUT

100~277 V |
60 Hz

11,8W | 2700K | 1546lm built in
upon request 3000K 1805lm
Dimmer: PHASE CONTROL & 0-10V
(only 120Vac TRIAC Dimmers)

NET WEIGHT
PESO NETO

1,2 kg | 2,6 lb


PACKAGING
EMBALAJE

32x65x23 cm | 12,6x25,6x9"
2 kg | 4,4 lb

LI06G

LED

ADA CE UK CA CCC

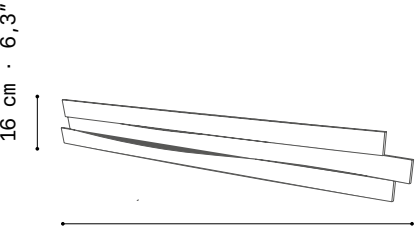

16 cm · 6,3"

103,5 cm · 40,7"

Depth · Profundidad
6,5 cm | 2,6"

LIGHT SOURCE
FUENTE DE LUZ

Light source built in
Fuente de luz incluida

230 V | 50 Hz

17W | 2700K | 2558lm built in
upon request 3000K 2632lm
Dimmer: PHASE CUT

NET WEIGHT
PESO NETO

2,9 kg | 6,4 lb


PACKAGING
EMBALAJE

110x31x25 cm | 43,3x12,2x9,8"
4,7 kg | 10,4 lb

LI06G-D

LED

ADA CE UK CA CCC

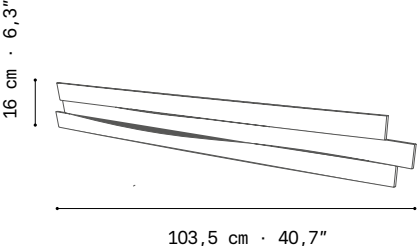

16 cm · 6,3"

103,5 cm · 40,7"

Depth · Profundidad
6,5 cm | 2,6"

LIGHT SOURCE
FUENTE DE LUZ

Light source built in
Fuente de luz incluida

230 V | 50 Hz

23,6W | 2700K | 3020lm built in
upon request 3000K 3115lm
Dimmer: PHASE CUT

100~277 V |
60 Hz

17W | 2700K | 2558lm built in
upon request 3000K 2632lm
Dimmer: PHASE CONTROL & 0-10V
(only 120Vac TRIAC Dimmers)

NET WEIGHT
PESO NETO

2,9 kg | 6,4 lb

PACKAGING
EMBALAJE

110x31x25 cm | 43,3x12,2x9,8"
4,7 kg | 10,4 lb

Lisa

a-emotional light team, 2025

p. 40

MATERIALS
MATERIALES

Painted stainless steel
Acero inoxidable pintado

- FINISHES
ACABADOS
- White · Blanco
- Beige · Beige
- Grey · Gris
- Taupe · Topo
- Black · Negro
- Custom · Personalizado

SUPPORT
SOPORTE


Painted steel
Acero pintado

MOUNTING OPTIONS
OPCIONES DE INSTALACIÓN

Wall lamp
Aplique

LL06

ADA CE UK CA CCC



27 cm | 10,63"

20 cm · 7,87"

Depth · Profundidad
9,5 cm | 3,7"

LIGHT SOURCE
FUENTE DE LUZ

Recommended bulbs
Bombillas recomendadas

230 V | 50 Hz

G9 LED - Max. 2x4 W

120 V | 60 Hz

G9 LED - Max. 2x4 W

NET WEIGHT
PESO NETO


0,7 kg | 1,5 lb

PACKAGING
EMBALAJE

36x26x19 cm | 14,2x10,2x7,5"
1 kg | 2,2 lb

LL06G

ADA CE UK CA CCC



45 cm | 17,72"

20 cm · 7,87"

Depth · Profundidad
9 cm | 3,5"

LIGHT SOURCE
FUENTE DE LUZ

Recommended bulbs
Bombillas recomendadas

230 V | 50 Hz

G9 LED - Max. 2x4 W

120 V | 60 Hz

G9 LED - Max. 2x4 W

NET WEIGHT
PESO NETO

0,9 kg | 2 lb

PACKAGING
EMBALAJE

56x26x19 cm | 22x10,2x7,5 kg