

CLIPPO P3 13W LED DIM TO WARM


SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	120-1100
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	33 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	84
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,73
GROSS WEIGHT	[kg]	0,76
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

33°

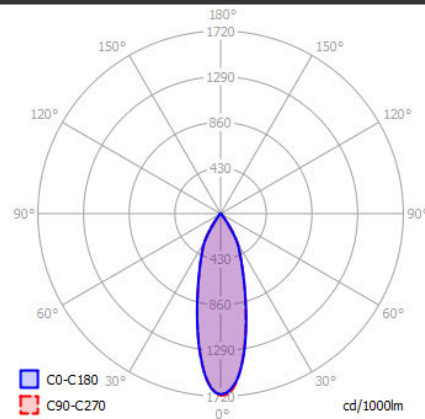

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 50
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold



black/black

black/gold

TRACK MOUNTING

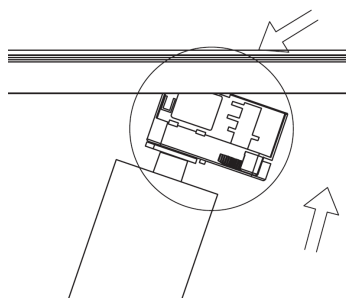

FIXTURE DIMENSIONS

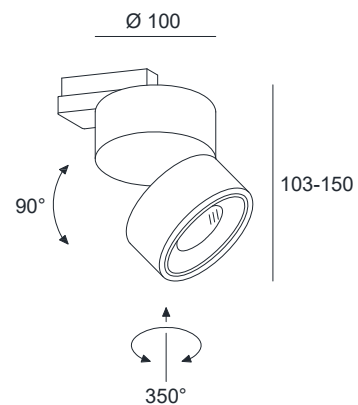

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

CLIPPO P3 14W LED


SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1310 / 1375
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	32 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	98
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,73
GROSS WEIGHT	[kg]	0,76
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

32°

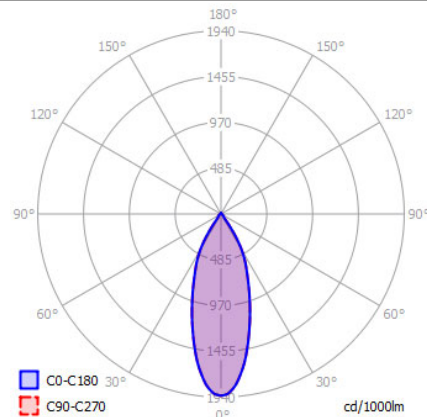

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 48
LENS	[°]	18
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold



black/black

black/gold

TRACK MOUNTING

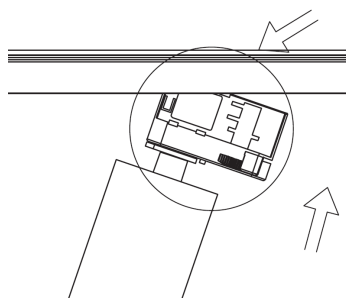

FIXTURE DIMENSIONS

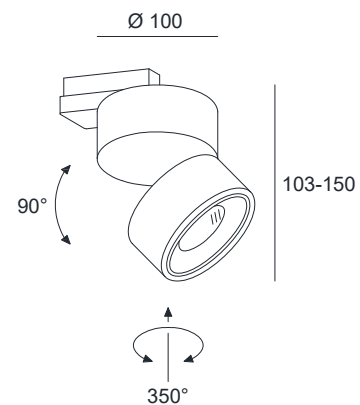

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING