

# LEDA

## SPECIFICATIONS

<b>MOUNTING</b>		<b>CEILING RECESSED</b>
POWER	[W]	2,4
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	170
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	70

POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER

<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,05
GROSS WEIGHT	[kg]	0,05
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		ALU


CUT-OUT	[mm]	Ø43
RECESSED DEPTH (H)	[mm]	35

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

30°

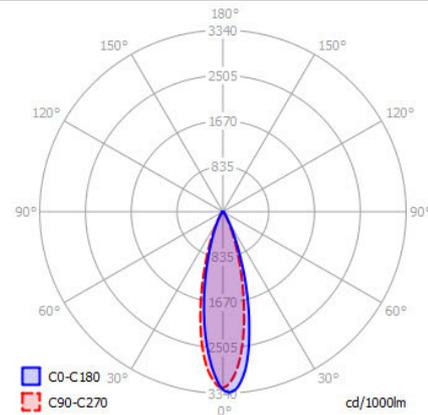


## OPTIONS / OPTIONAL ACCESSORIES

### Colours



## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

