

LINEA 5

SPECIFICATIONS


| | | |
|---------------------|---------|-------------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 5x2 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 5x180 / 5x190 |
| LIGHT COLOUR | [K] | 2700 / 3000 |
| CRI | | >95 |
| BEAM ANGLE | [°] | 48 (default) |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 90 |
| POWER SUPPLY | [V] [A] | 700mA CC |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,19 |
| GROSS WEIGHT | [kg] | 0,20 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | 141x37 |
| RECESSED DEPTH (H) | [mm] | 55 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION


48°

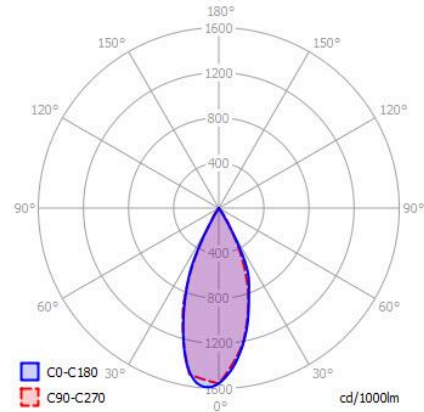


OPTIONS / OPTIONAL ACCESSORIES

12° and 34° beam angle on request



Colours



CUT OUT DIMENSIONS

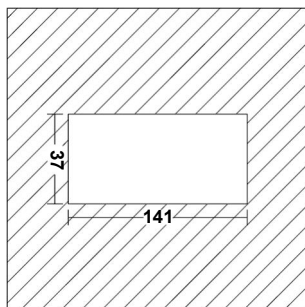

FIXTURE DIMENSIONS

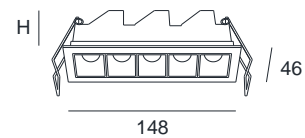

DLS LIGHTING

www.dlslighting.com

***DLS**
LIGHTING