


# PISA

## SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	2,1
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	180
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	85
POWER SUPPLY	[V] [A]	24V dc
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM / ACRYLIC GLASS
INGRESS PROTECTION		IP65
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,59
GROSS WEIGHT	[kg]	0,62
COLOUR (HOUSING)		BLACK ~RAL9005
OUTLET CABLE		2m H05RN-F 2x0,5mm <sup>2</sup>




## LIGHT DISTRIBUTION

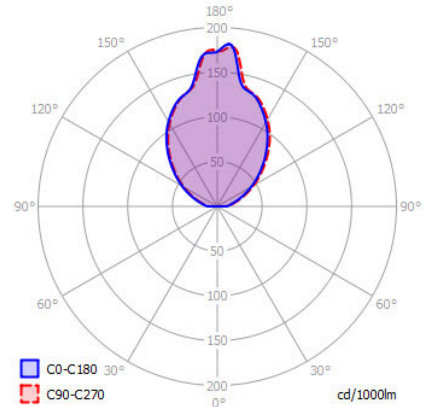

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK

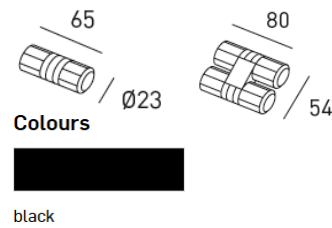

## MOUNTING DIMENSIONS

n/a

## FIXTURE DIMENSIONS

