

***DLS**
LIGHTING

EGGER*
LICHT



DLS - Design Lighting Selection präsentiert Lichtwerkzeuge, die der Vielzahl der Anforderungen des Lichtplaners entsprechen und für jede Architektur die passende Lichtstimmung schaffen.



Eindeutiges Markenzeichen unserer Produkte ist die Einfachheit und Klarheit in der Form, die Funktionalität und die dauerhafte Qualität. Ausgereifte Technik in schlichtem, formschönem Design in Verbindung mit hoher Lichtqualität schafft eine außergewöhnliche architektonische Raumwirkung und eine spezielle Beleuchtungsatmosphäre.

DLS - eine gelungene Symbiose aus Architektur, Atmosphäre, Design und Innovation.

DLS - Design Lighting Selection presents lighting tools for the multiple needs of lighting designers, offering the best atmosphere of light for every requirement of architecture.

Brand mark of our luminaires is simplicity and formal precision, functionality and lasting quality. Fully developed technique in homespun and shapely design combined with perfect lighting quality creates an exceeding architectural ambiance and a special lighting atmosphere.

DLS is the right symbiosis of architecture, atmosphere, design and innovation.

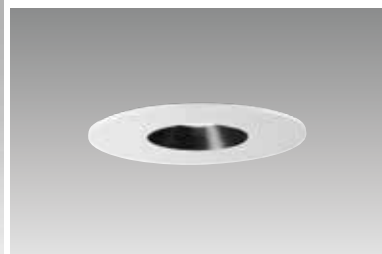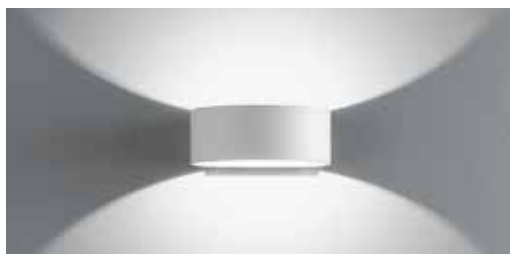

INDEX


INDOOR

							
BRICK	4 BRICK FLUO	4 GINGER	8 MIAMI	8 HENRY	8 FEELING	10 SUNRISE	10
							
FLATBOX	20 SUPREME	22 ZOOM	24 ZOOM TABLE	26 FLOW	28 HARMONY	28 FLOW	30
							
STYLE Q	46 STYLE DUO	48 NEWTON	50 KUBUS	52 FLEUR	52 CL 15	52 BALI	54/55
							
ZOOM	68 ALULINE	72 LEDA	74 DIANA	74 PLUTON	76 LUCKY STAR	78 SPLIT	78

RECESSED





						
SQUARE	84 KAMEN	84 NO FRAME 80	88 NO FRAME 100	90 NO FRAME 150	92 NO FRAME 80 ROUND	94 NO FRAME 150 ROUND 94
						
MK	106 BIG	108 CONE	108 DEXTER	108 ALASKA	110 DONUT	110 SONO 110
						
CITY	124 NEXO	126 CENTRO	126 STRATO	128 SINO BAKERY	130 SINO MEAT	130 VARO 130

OUTDOOR

							
STANLEY	134 WEBSTER	138 SYDNEY	138 YORK	140 SECRET	142 MIAMI	142 SILENCE	144
							
DOT	153						

APPENDIX

		LEGEND	ENERGY EFFICIENCY	ALPHABETICAL INDEX	CODE INDEX
DRIVER	156-157 TRANSFORMER	158	158	159	159 ff.

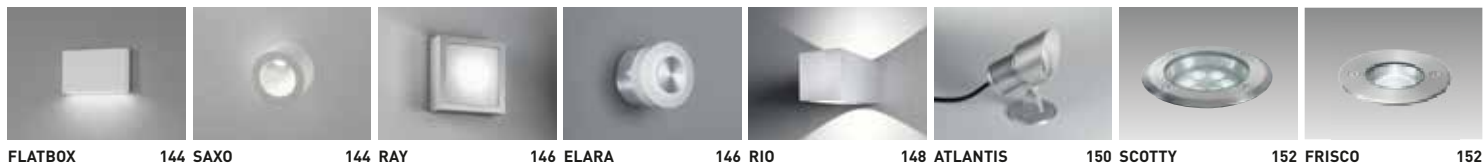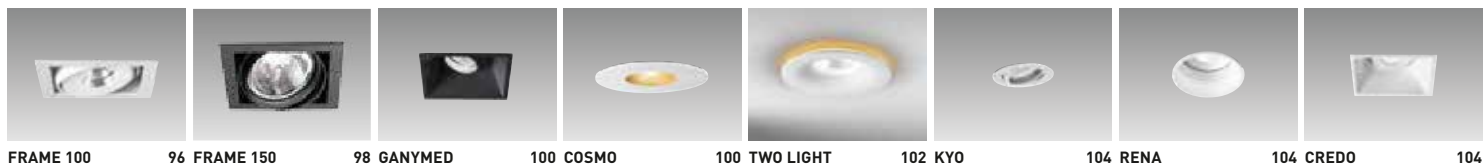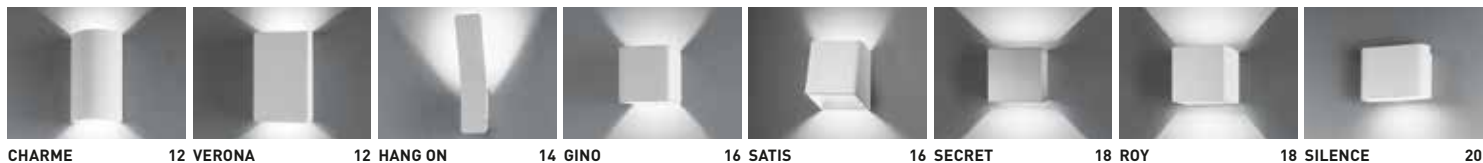


BRICK 15

Wandleuchte 230 V für Direkt- und Indirektbeleuchtung, verwendbar für 230 V Halogen und LED


Wall luminaire 230 V for direct and indirect lighting, usable for 230 V halogen and LED



*



dim

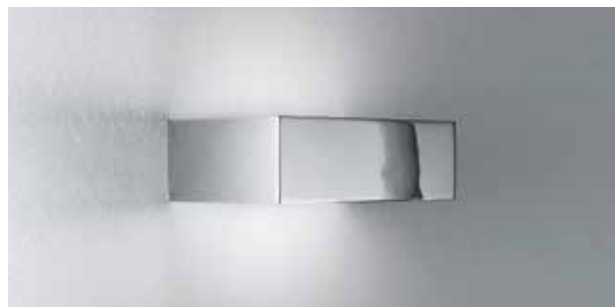

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D301	BRICK 15	chrome	1x60W/G9	-
D303	BRICK 15	grey	1x60W/G9	-
D355	BRICK 15	white	1x60W/G9	-


BRICK 30

Wandleuchte 230 V für Halogen und LED oder LED mit eingebautem Driver, für Direkt- und Indirektbeleuchtung


Wall luminaire 230 V for halogen and LED or LED with built-in driver, for direct and indirect lighting



LED: 1300 Lumen



G9 dim

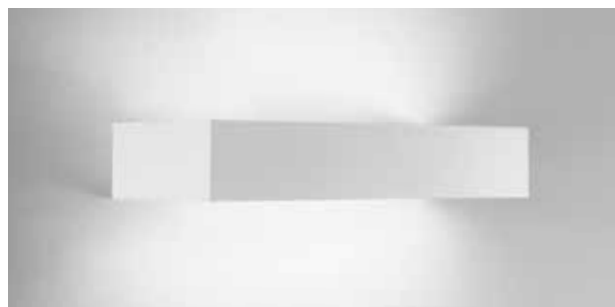

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D302	BRICK 30	chrome	3x60W/G9	-
D304	BRICK 30	grey	3x60W/G9	-
D356	BRICK 30	white	3x60W/G9	-
D758	BRICK 30 LED	chrome	16W LED 3000K	incl. driver
D756	BRICK 30 LED	white	16W LED 3000K	incl. driver


BRICK FLUO 24

Wandleuchte 230 V für Direkt- und Indirektbeleuchtung, inklusive eingebautem EVG

Wall luminaire 230 V for direct and indirect lighting, including electronic ballast



*



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D601	BRICK FLUO 24	chrome	1xTC-L 24W/2G11	incl. electr. ballast
D602	BRICK FLUO 24	grey	1xTC-L 24W/2G11	incl. electr. ballast
D655	BRICK FLUO 24	white	1xTC-L 24W/2G11	incl. electr. ballast


BRICK FLUO 36

Wandleuchte 230 V für Direkt- und Indirektbeleuchtung, inklusive eingebautem EVG

Wall luminaire 230 V for direct and indirect lighting, including electronic ballast




*

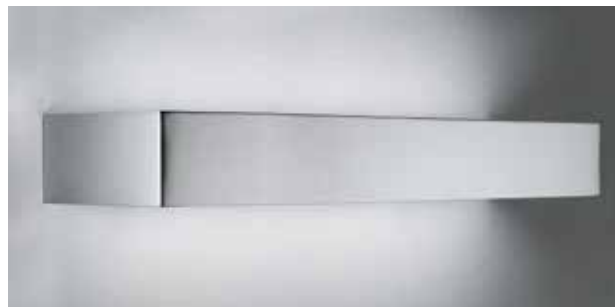

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D603	BRICK FLUO 36	chrome	1xTC-L 36W/2G11	incl. electr. ballast
D604	BRICK FLUO 36	grey	1xTC-L 36W/2G11	incl. electr. ballast
D656	BRICK FLUO 36	white	1xTC-L 36W/2G11	incl. electr. ballast








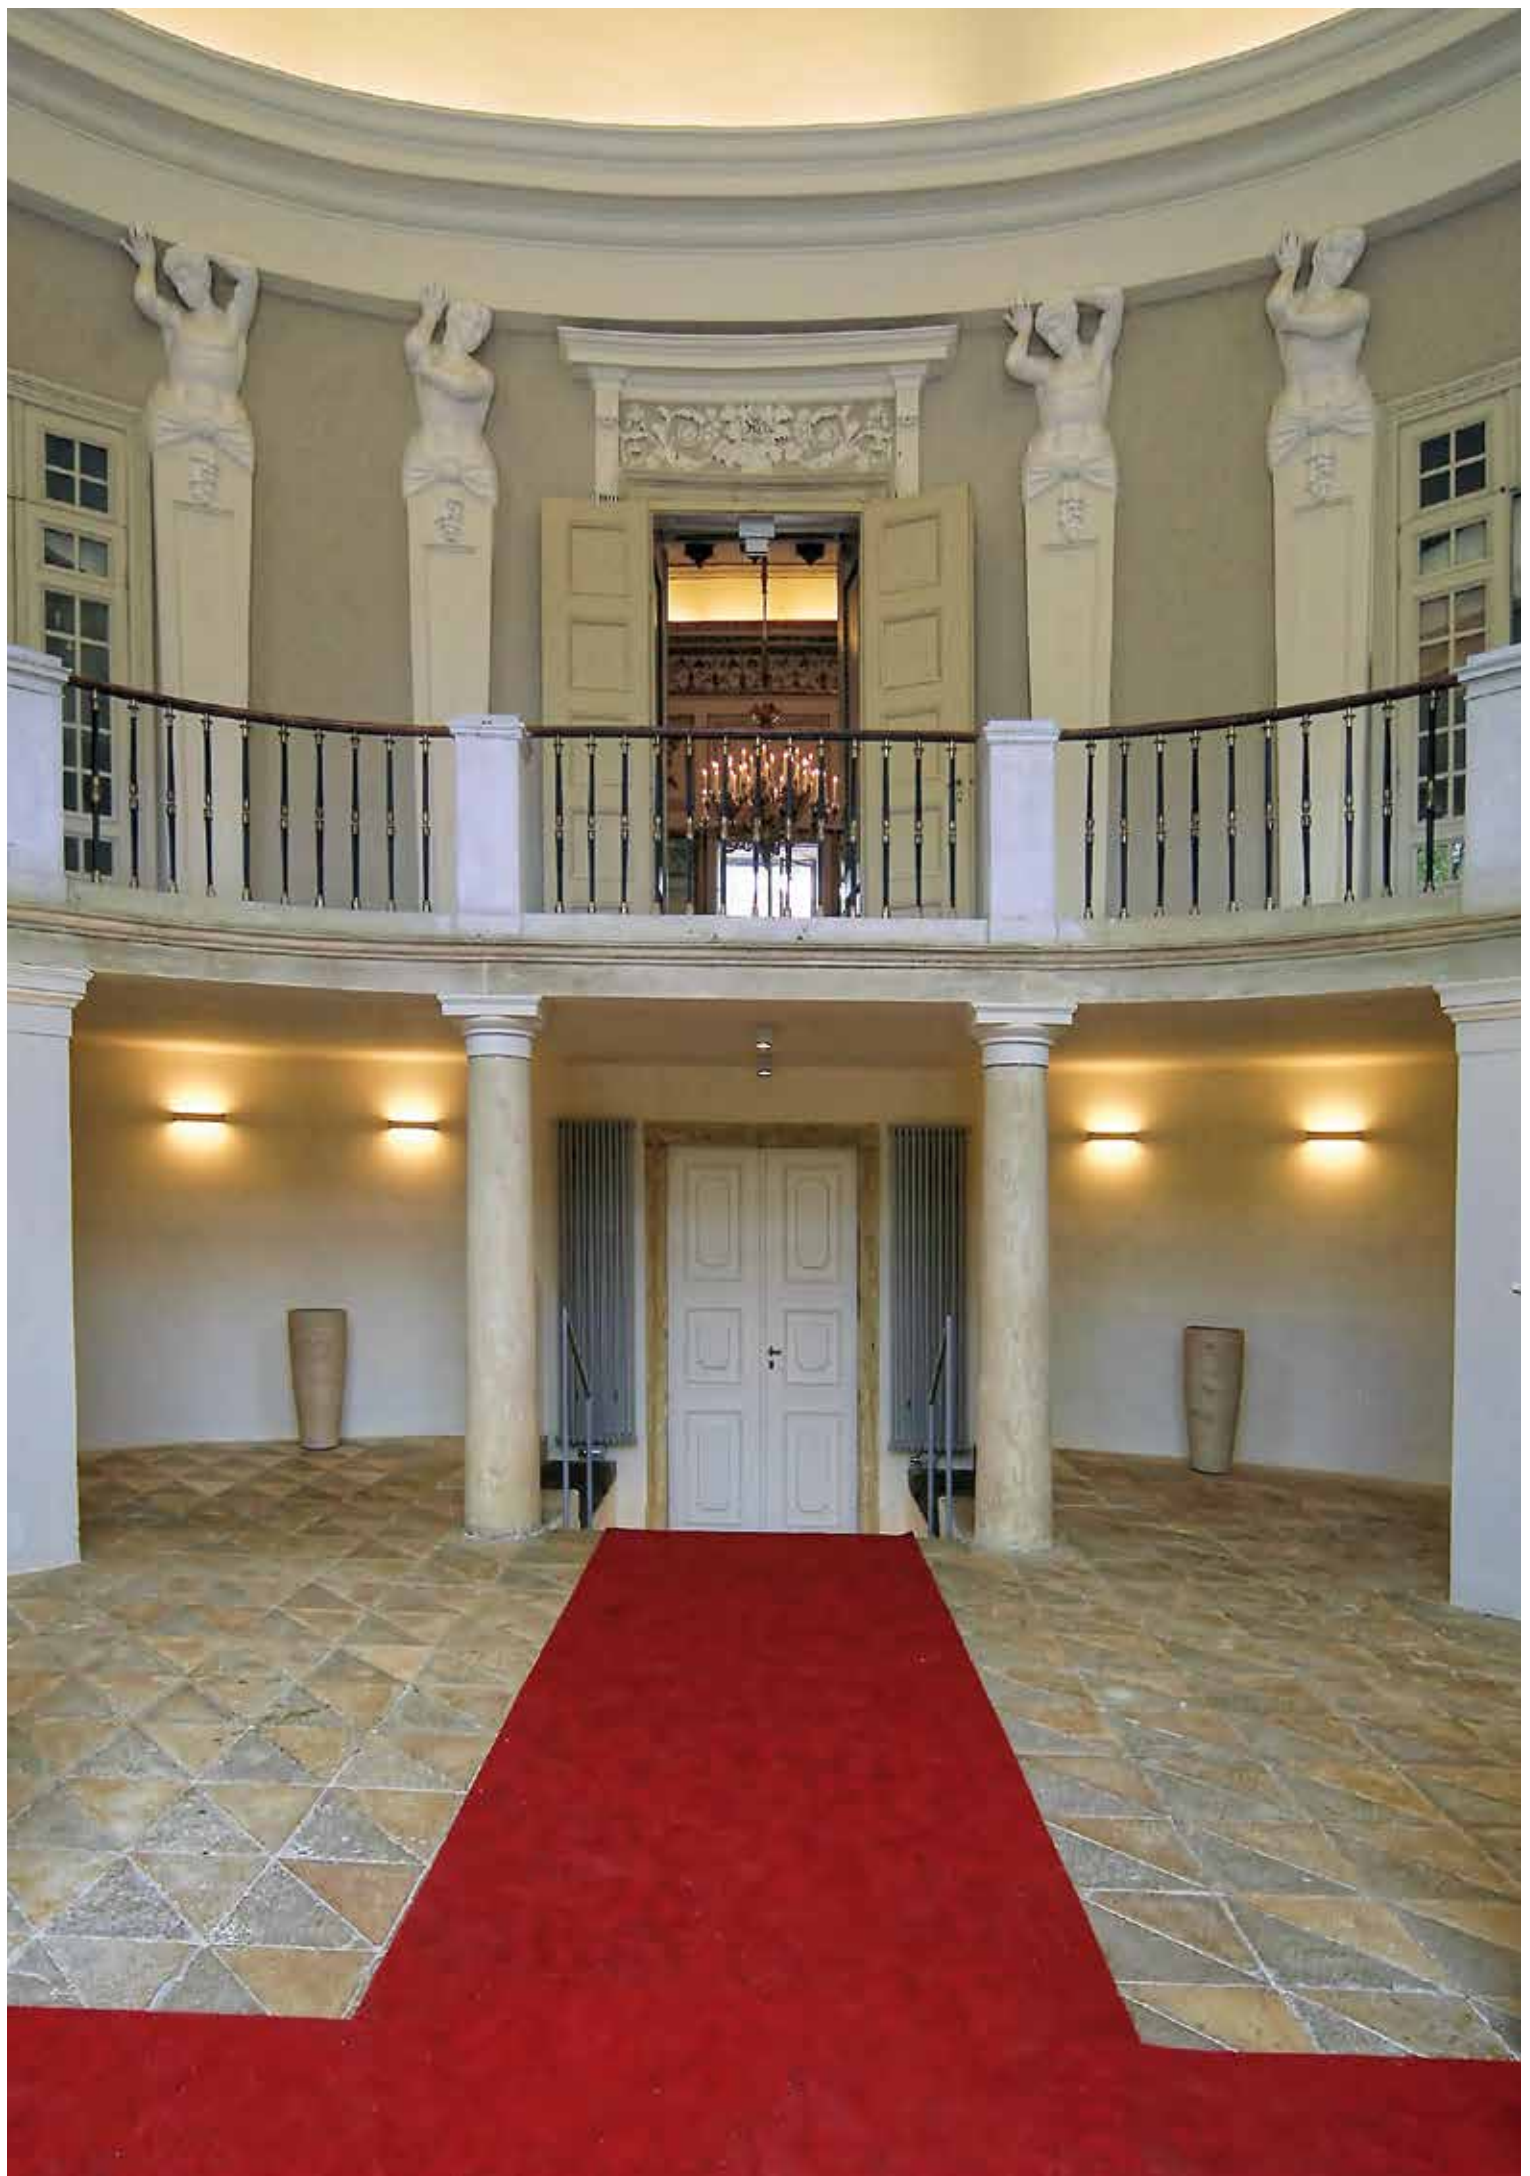

GINGER

LED-Wandleuchte 7 W mit eingebautem Driver 230 V, aus massivem Aluminium, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 7 W with built-in driver 230 V, made of aluminium, for direct and indirect lighting


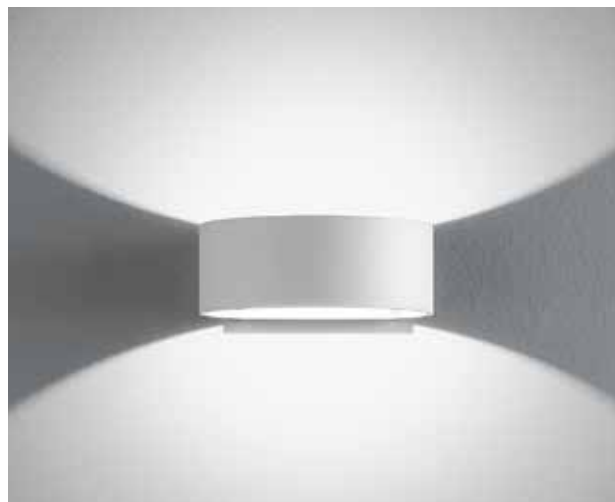



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D286	GINGER	white	1x7W LED 3000K	incl. driver

MIAMI

LED-Wandleuchte 5,4 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 5,4 W with built-in driver 230 V, made of extruded aluminium, for direct and indirect lighting, to be used in indoor and outdoor areas, IP54

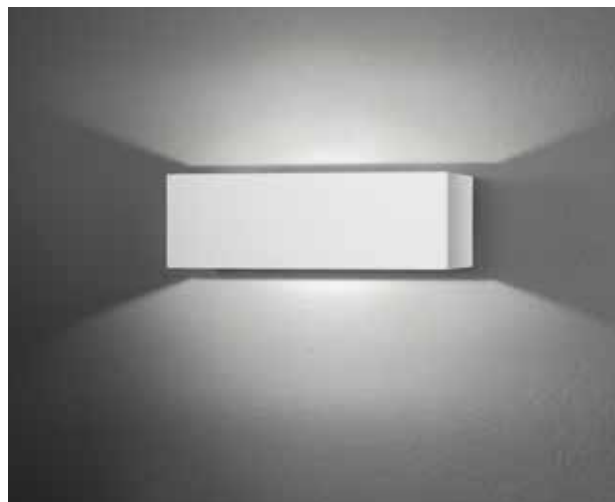




IP54

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D204	MIAMI	white	5,4W LED 3000K	incl. driver


HENRY

LED-Wandleuchte 8,1 W mit eingebautem Driver 230 V, aus massivem Aluminium, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 8,1 W with built-in driver 230 V, made of aluminium, for direct and indirect lighting

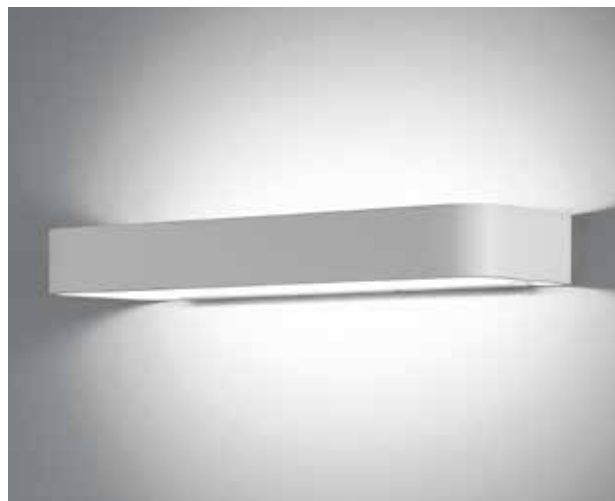



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D288	HENRY	white	3x2,7W LED 3000K	incl. driver

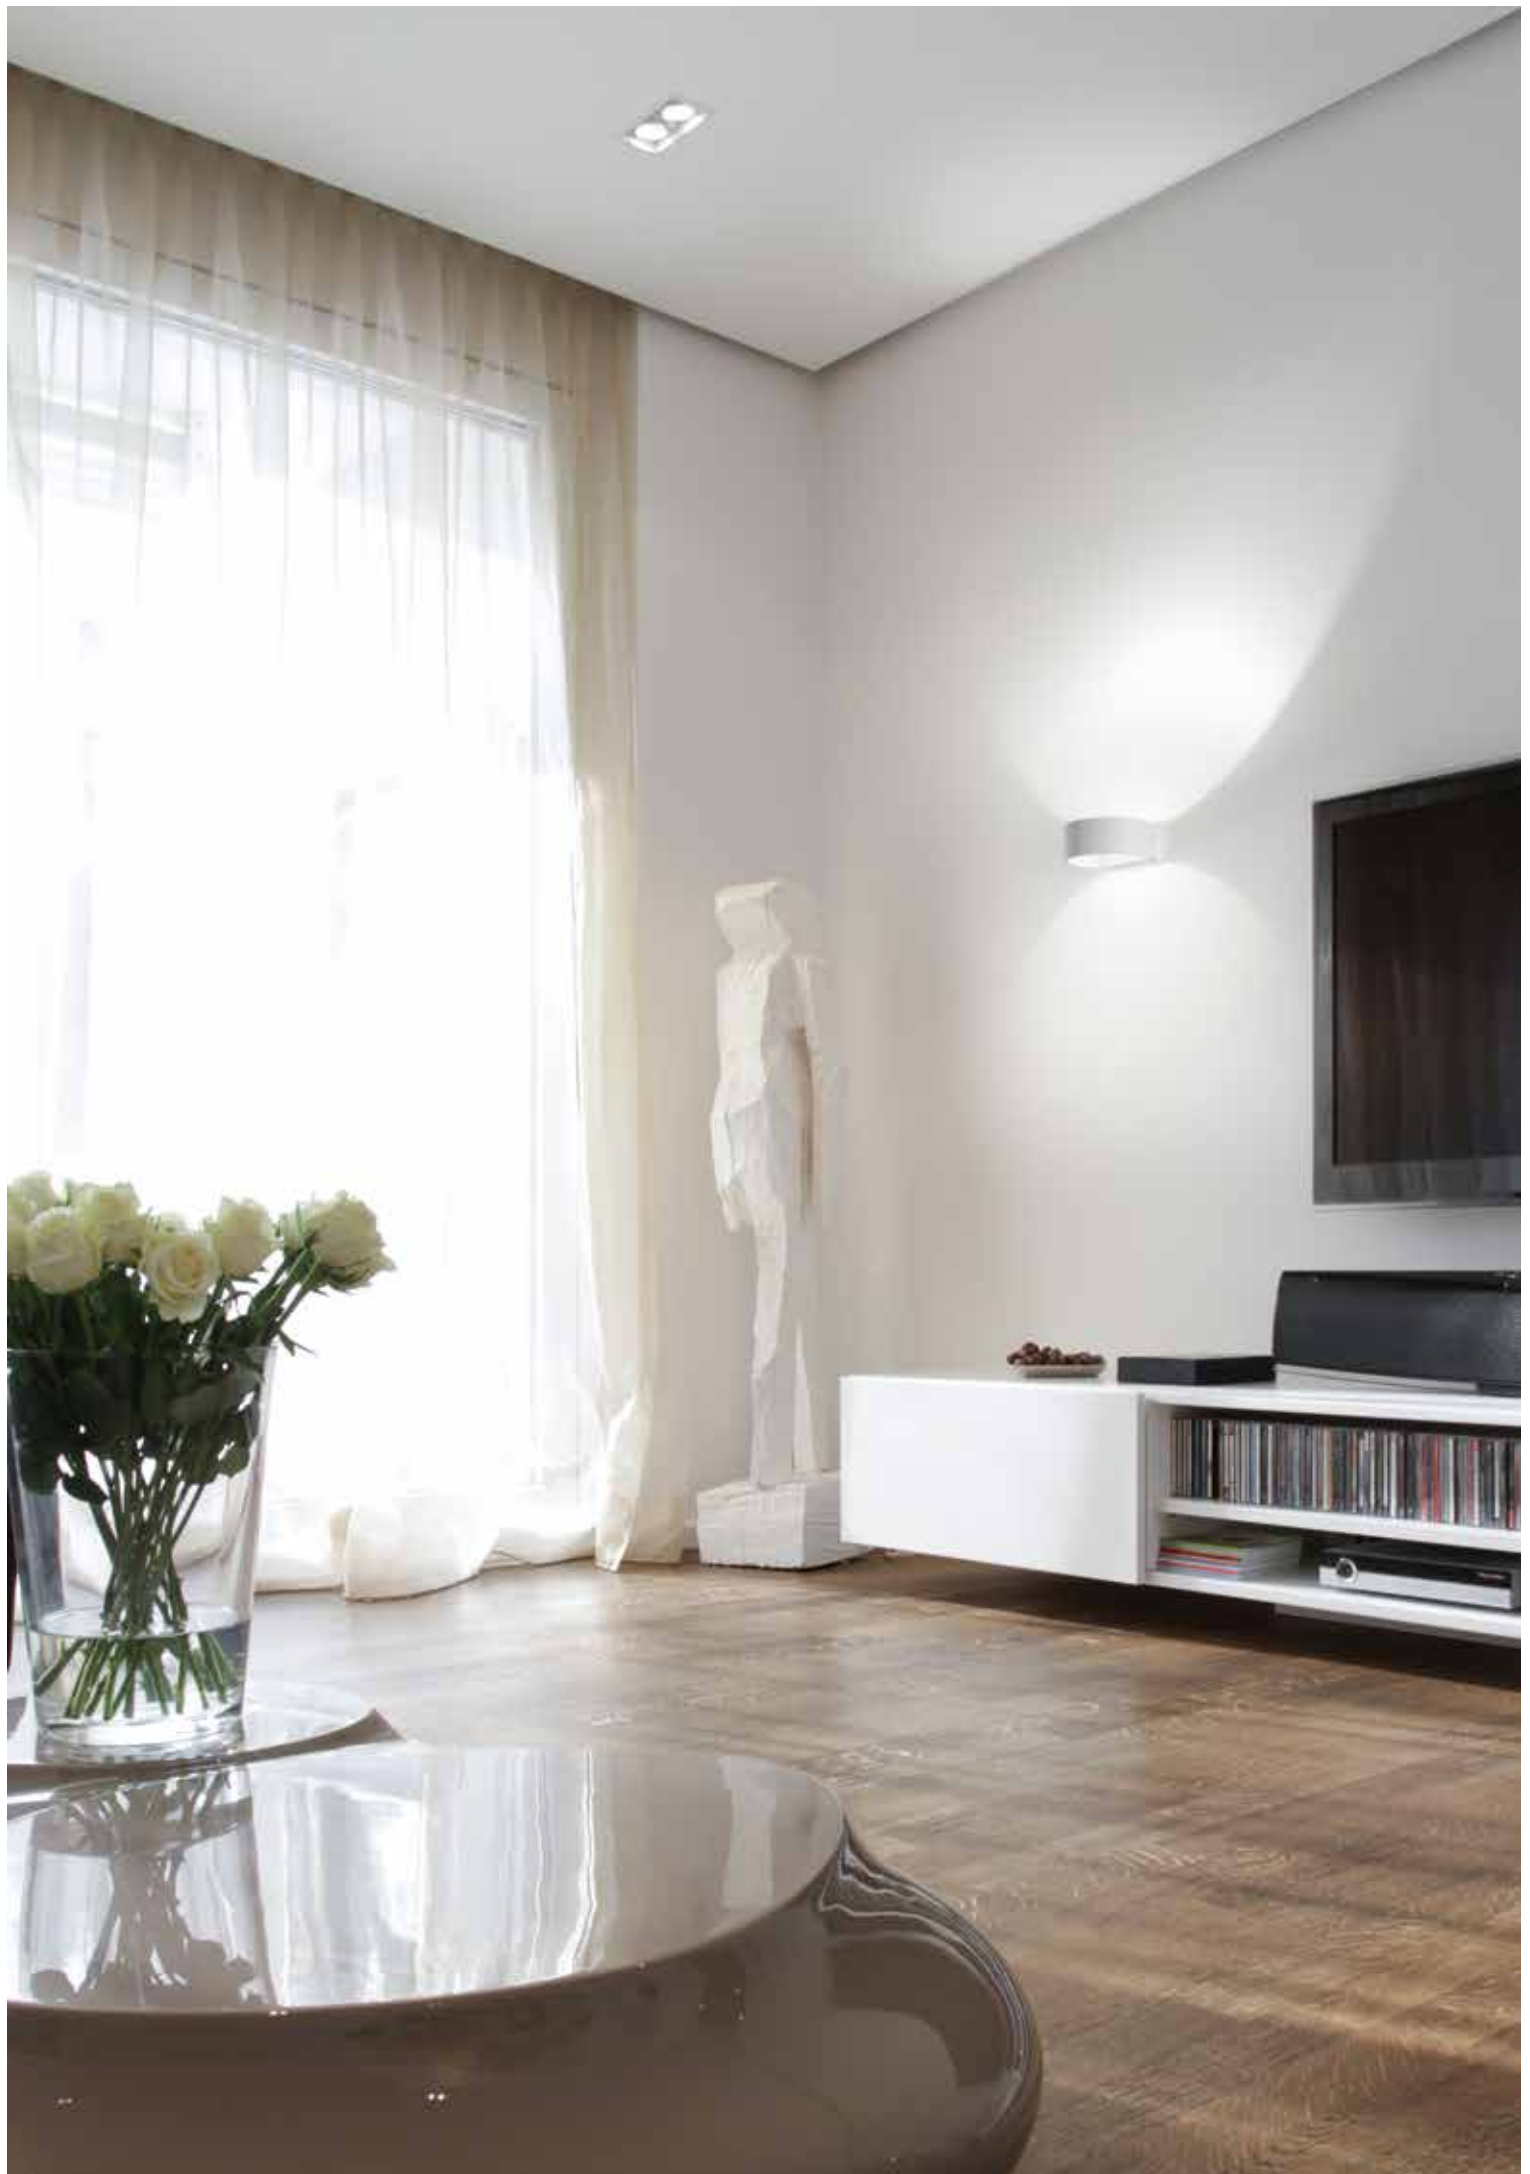

FEELING

LED-Wandleuchte 2x3 W mit eingebautem Driver 230 V, Innenteil gold, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 2x3 W with built-in driver 230 V, inside gold, for direct and indirect lighting






CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D784	FEELING	black/gold	2x3W LED 3000K	incl. driver

SUNRISE S

Wandleuchte 230 V für Direkt- oder Indirektbeleuchtung, aus lackiertem Aluminium, verwendbar für 230 V Halogen und LED, IP44

Wall luminaire 230 V for direct or indirect lighting, made of coated aluminium, usable for 230 V halogen and LED, IP44






CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D316	SUNRISE S	black/gold	1x25W/G9	-
D326	SUNRISE S	black/silver	1x25W/G9	-

SUNRISE

Wandleuchte 230 V für Direkt- oder Indirektbeleuchtung, aus lackiertem Aluminium, verwendbar für 230 V Halogen und LED, IP44

Wall luminaire 230 V for direct or indirect lighting, made of coated aluminium, usable for 230 V halogen and LED, IP44





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D317	SUNRISE	black/gold	2x25W/G9	-
D327	SUNRISE	black/silver	2x25W/G9	-



CHARME

LED-Wandleuchte 2x3 W aus Gips, mit eingebautem Driver 230 V, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 2x3 W made of plaster, with built-in driver 230 V, for direct and indirect lighting






CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D285	CHARME	white	2x3W LED 3000K	incl. driver


VERONA

LED-Wandleuchte 2x3 W aus Gips, mit eingebautem Driver 230 V, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 2x3 W made of plaster, with built-in driver 230 V, for direct and indirect lighting

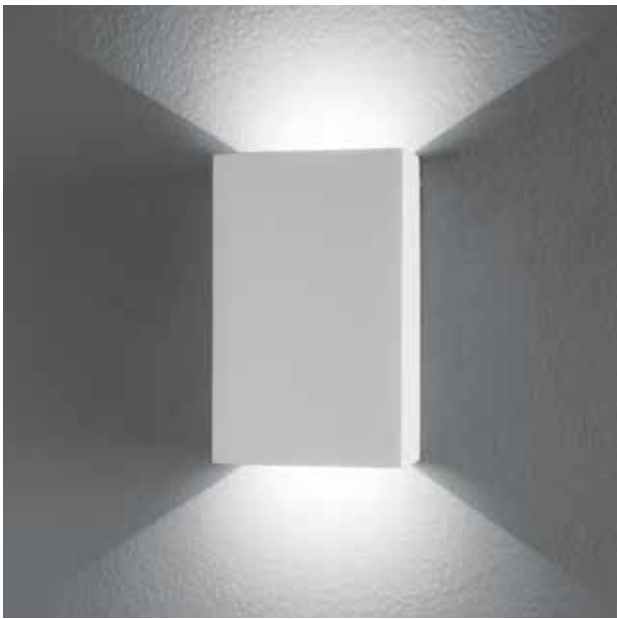


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D299	VERONA	white	2x3W LED 3000K	incl. driver

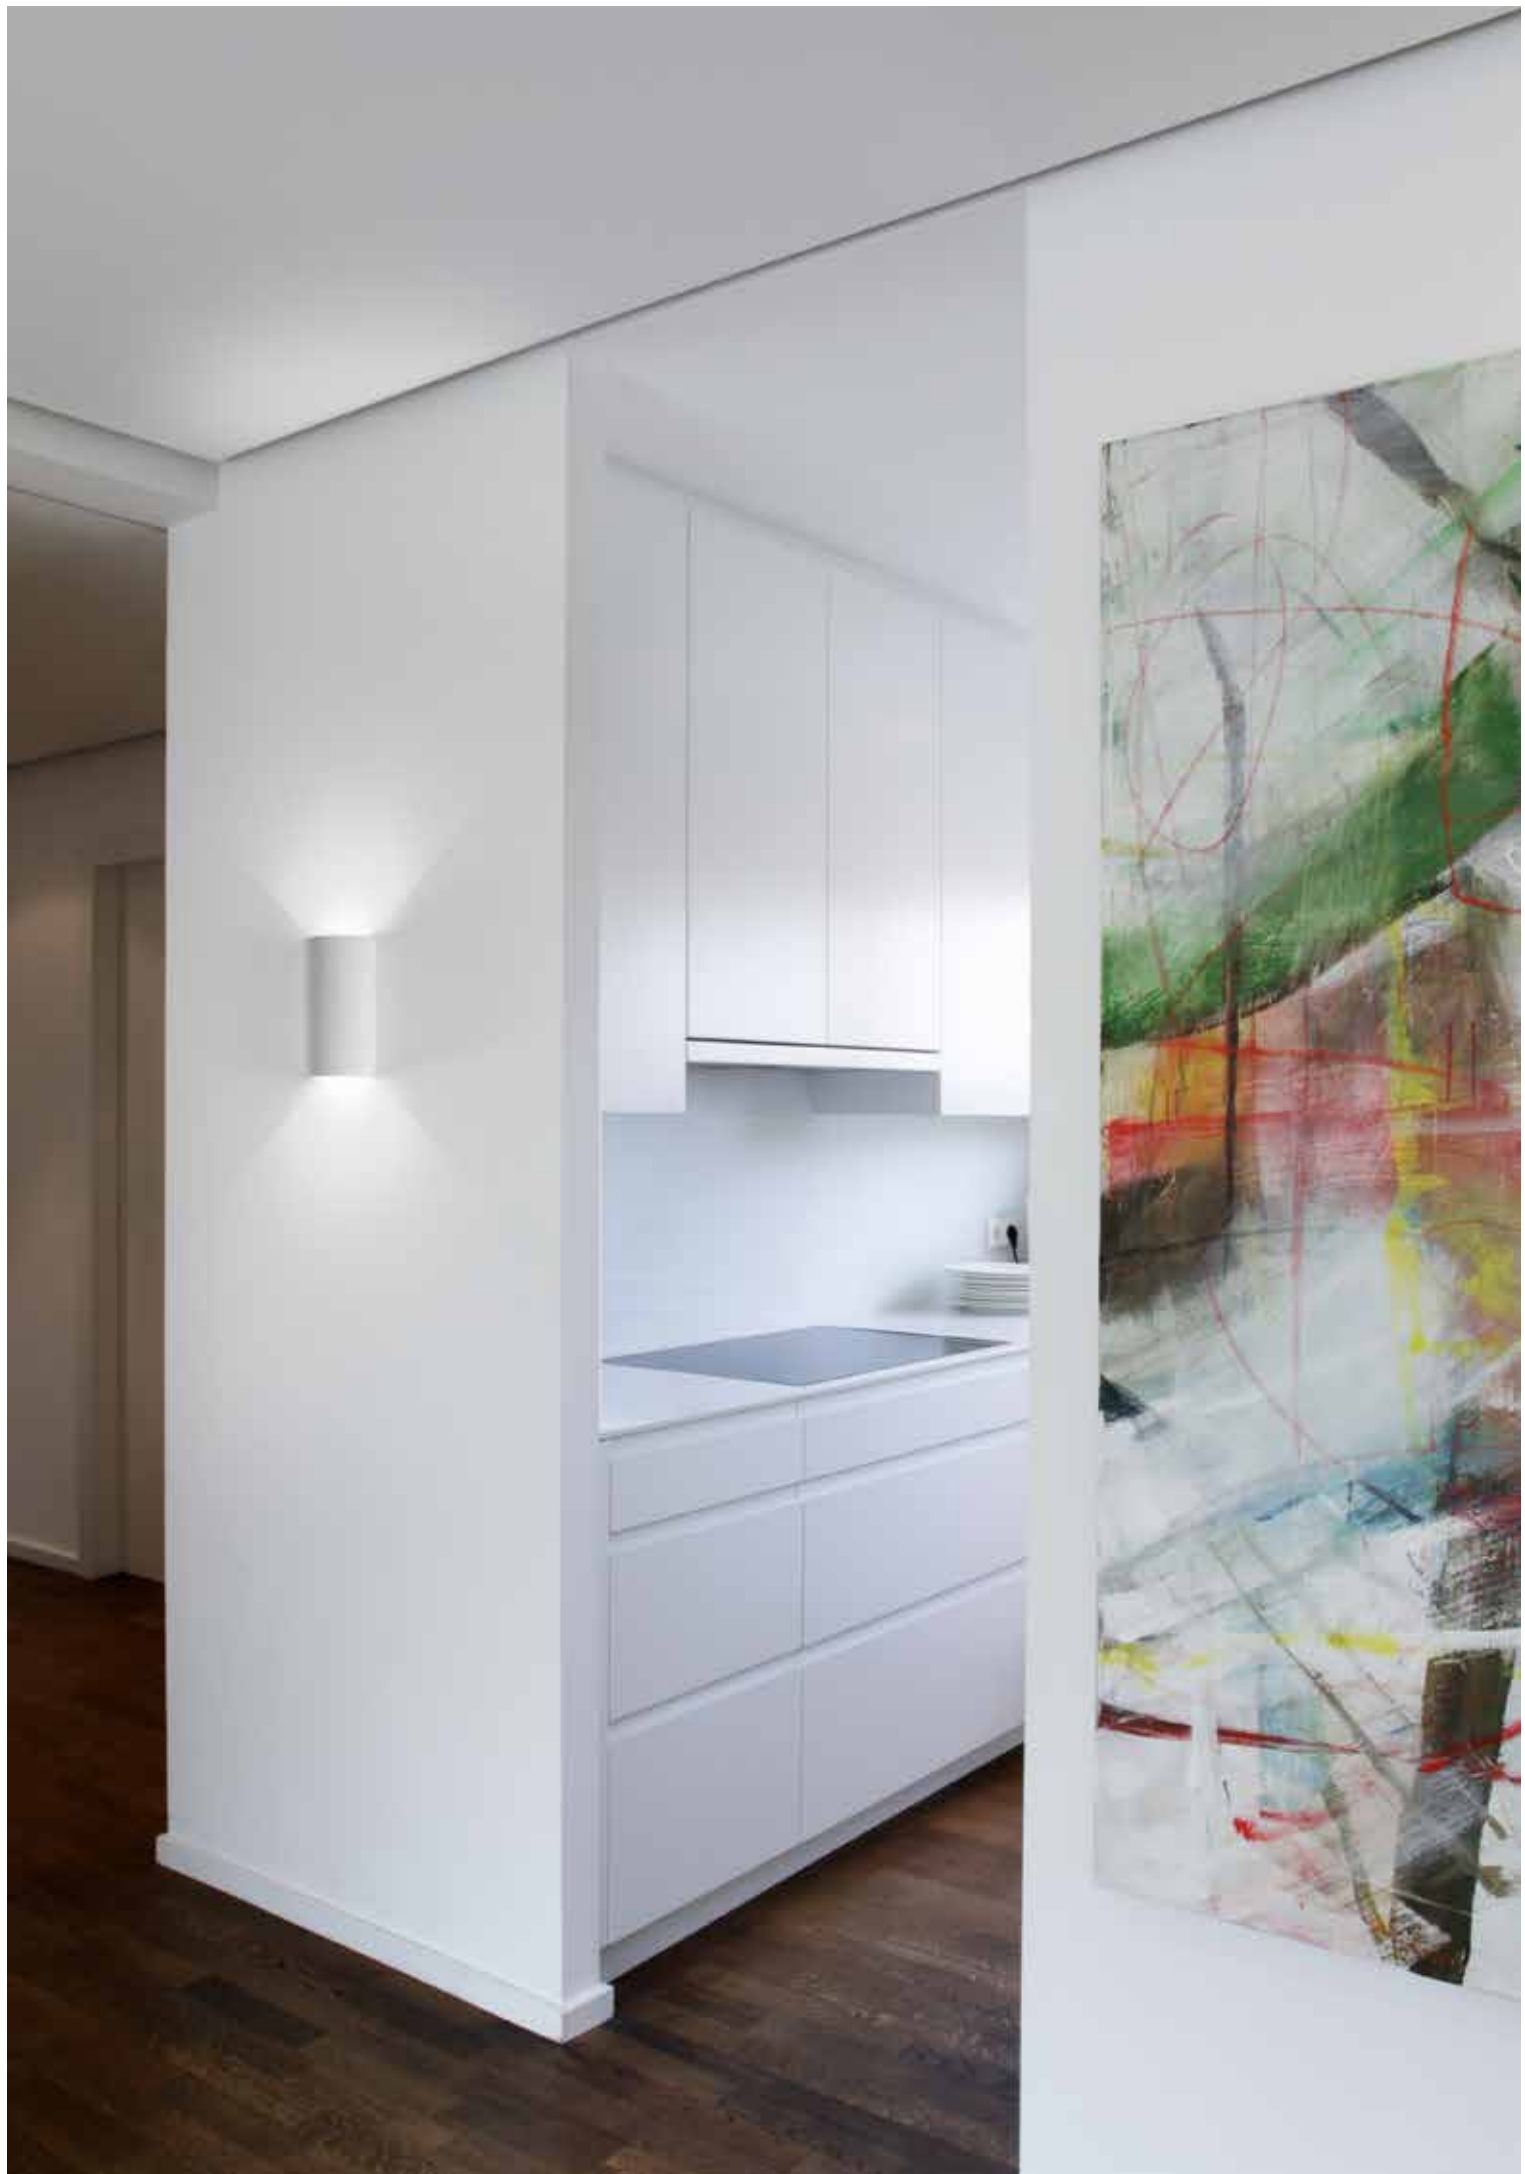

HANG ON

LED-Wandleuchte 6 W mit eingebautem Driver 230 V, aus massivem Aluminium, für Indirektbeleuchtung

LED-wall luminaire 6 W with built-in driver 230 V, made of aluminium, for indirect lighting





*

540 Lumen




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D287	HANG ON	white	1x6W LED  3000K	incl. driver



GINO

LED-Wandleuchte 1 x 6 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 1 x 6 W with built-in driver 230 V, made of extruded aluminium, for direct and indirect lighting

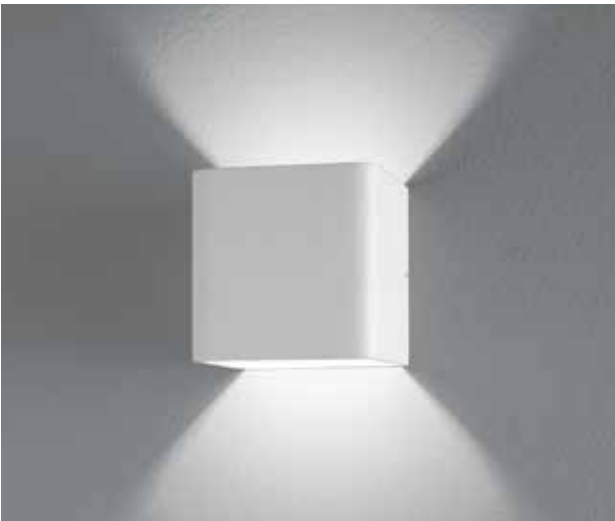



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D245	GINO	white	1x6W LED 3000K	incl. driver

SATIS


LED-Wandleuchte 1 x 6 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, mit asymmetrischem Lichtaustritt, für Direkt- und Indirektbeleuchtung

LED-wall luminaire 1 x 6 W with built-in driver 230 V, made of extruded aluminium, with asymmetrical light emission, for direct and indirect lighting




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D205	SATIS	white	1x6W LED 3000K	incl. driver



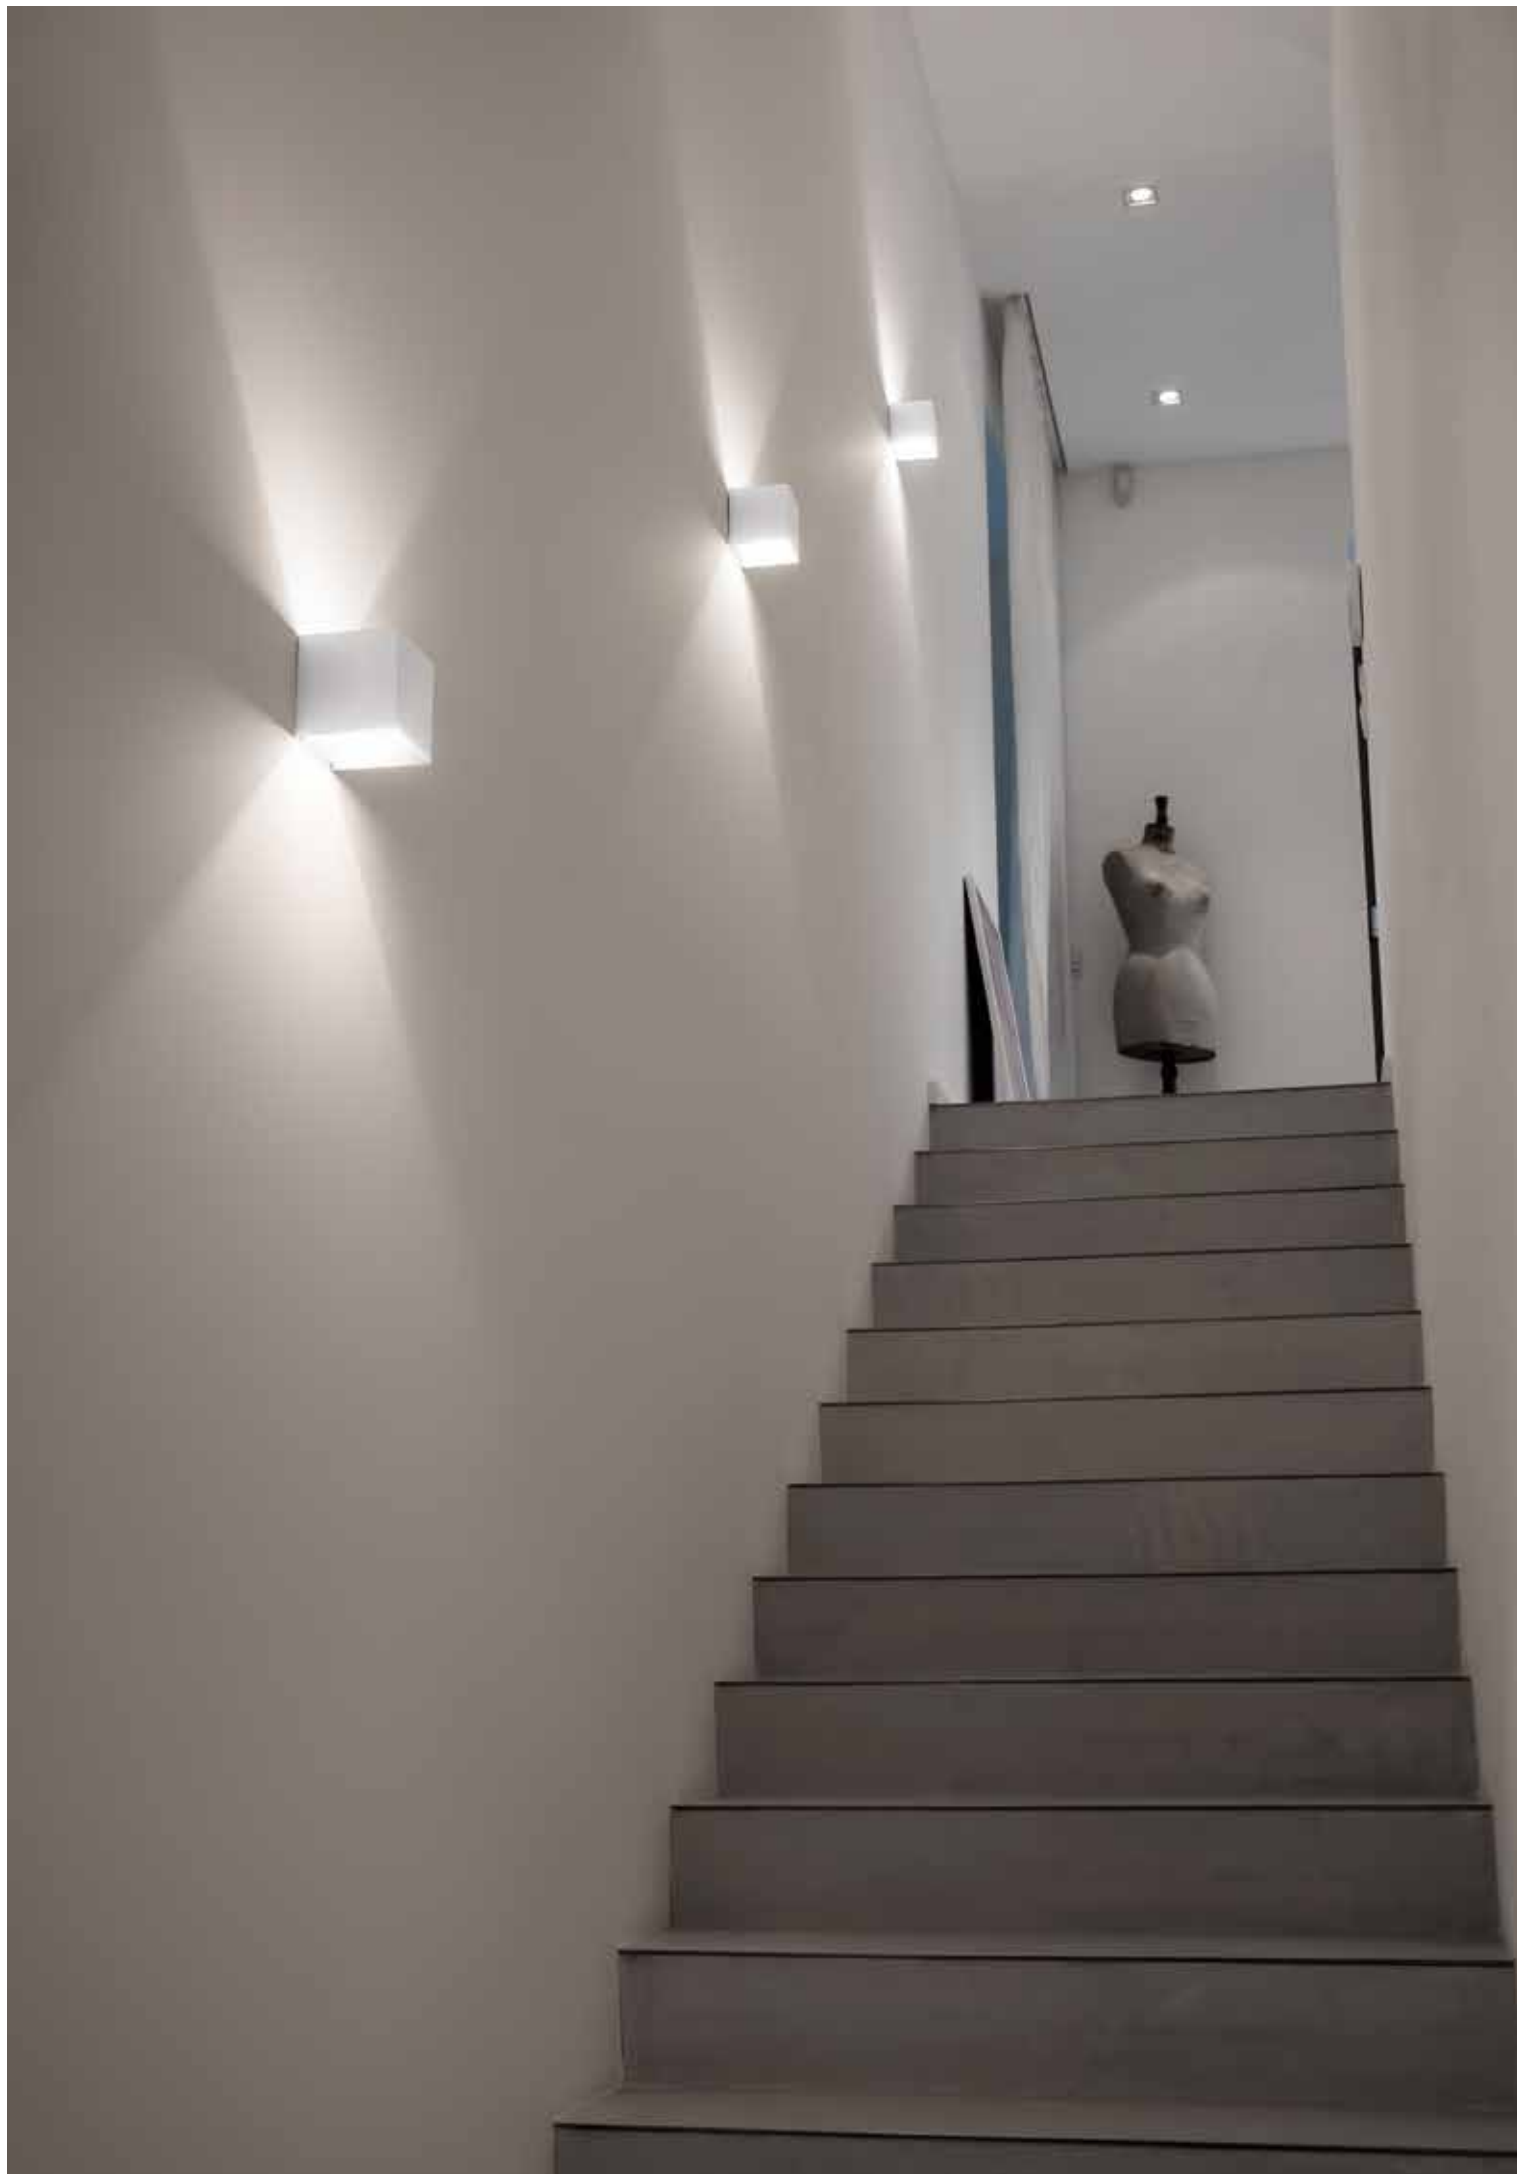

SECRET

LED-Wandleuchte 2x3 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54




LED-wall luminaire 2x3 W with built-in driver 230 V, made of extruded aluminium, for direct and indirect lighting, to be used in indoor and outdoor areas, IP54



*

2 x 250 Lumen


IP54

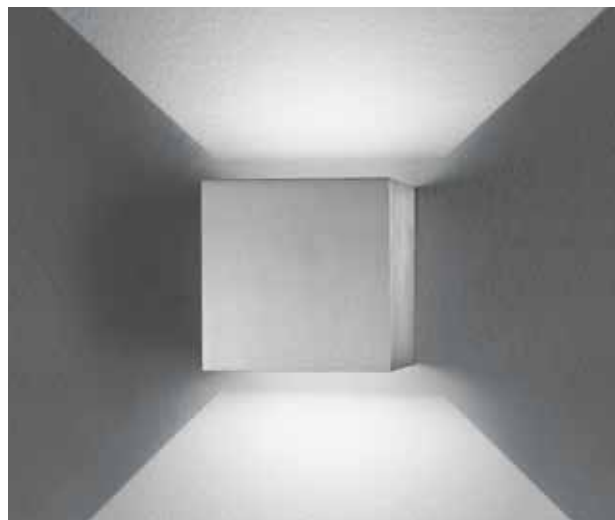

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D239	SECRET	alu	2x3W LED 3000K	incl. driver
D246	SECRET	grey	2x3W LED 3000K	incl. driver
D247	SECRET	white	2x3W LED 3000K	incl. driver

SECRET DOWN

LED-Wandleuchte 1x3 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direktbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54



LED-wall luminaire 1x3 W with built-in driver 230 V, made of extruded aluminium, for direct lighting, to be used in indoor and outdoor areas, IP54



*

250 Lumen


IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D200	SECRET DOWN	grey	1x3W LED 3000K	incl. driver
D201	SECRET DOWN	white	1x3W LED 3000K	incl. driver

ROY

Wandleuchte 230 V aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung, verwendbar für 230 V Halogen und LED




Wall luminaire 230 V made of extruded aluminium, for direct and indirect lighting, usable for 230 V halogen and LED



*

dim

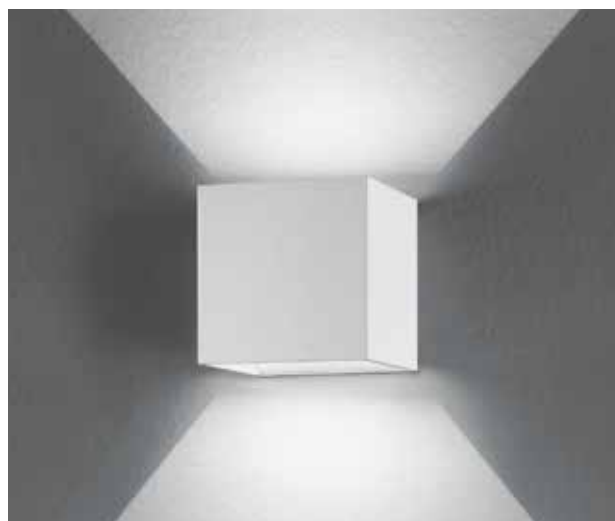

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D308	ROY	grey	1x60W/G9	-
D309	ROY	white	1x60W/G9	-
D311	ROY	alu	1x60W/G9	-



SILENCE

LED-Wandleuchte 3 W mit eingebautem Driver 230 V, mit einseitigem Lichtaustritt, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 3 W with built-in driver 230 V, with one-sided light emission, to be used in indoor and outdoor areas, IP54



LED

A** - A

*

270 Lumen

IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D220	SILENCE	white	3x1W LED 3000K	incl. driver
D221	SILENCE	grey	3x1W LED 3000K	incl. driver

FLATBOX

LED-Wandleuchte 3,6 W mit eingebautem Driver 230 V, mit einseitigem Lichtaustritt, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 3,6 W with built-in driver 230 V, with one-sided light emission, to be used in indoor and outdoor areas, IP54



LED

A** - A

*

360 Lumen

IP54





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D206	FLATBOX	white	3,6W LED 3000K	incl. driver




SUPREME

Wand- und Deckenleuchte für
T5 Leuchtstofflampen 230 V
mit Acrylglasabdeckung,
inklusive eingebautem EVG,
IP44

Wall and ceiling luminaire for
T5 fluorescent lamps 230 V
with acrylic glass cover, inclu-
ding electronic ballast, IP44



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D670	SUPREME 14	polished stainless steel	1x14W T5 (incl. 830 fluorescent lamp)	incl. electr. ballast
D671	SUPREME 21	polished stainless steel	1x21W T5 (incl. 830 fluorescent lamp)	incl. electr. ballast
D672	SUPREME 28	polished stainless steel	1x28W T5 (incl. 830 fluorescent lamp)	incl. electr. ballast

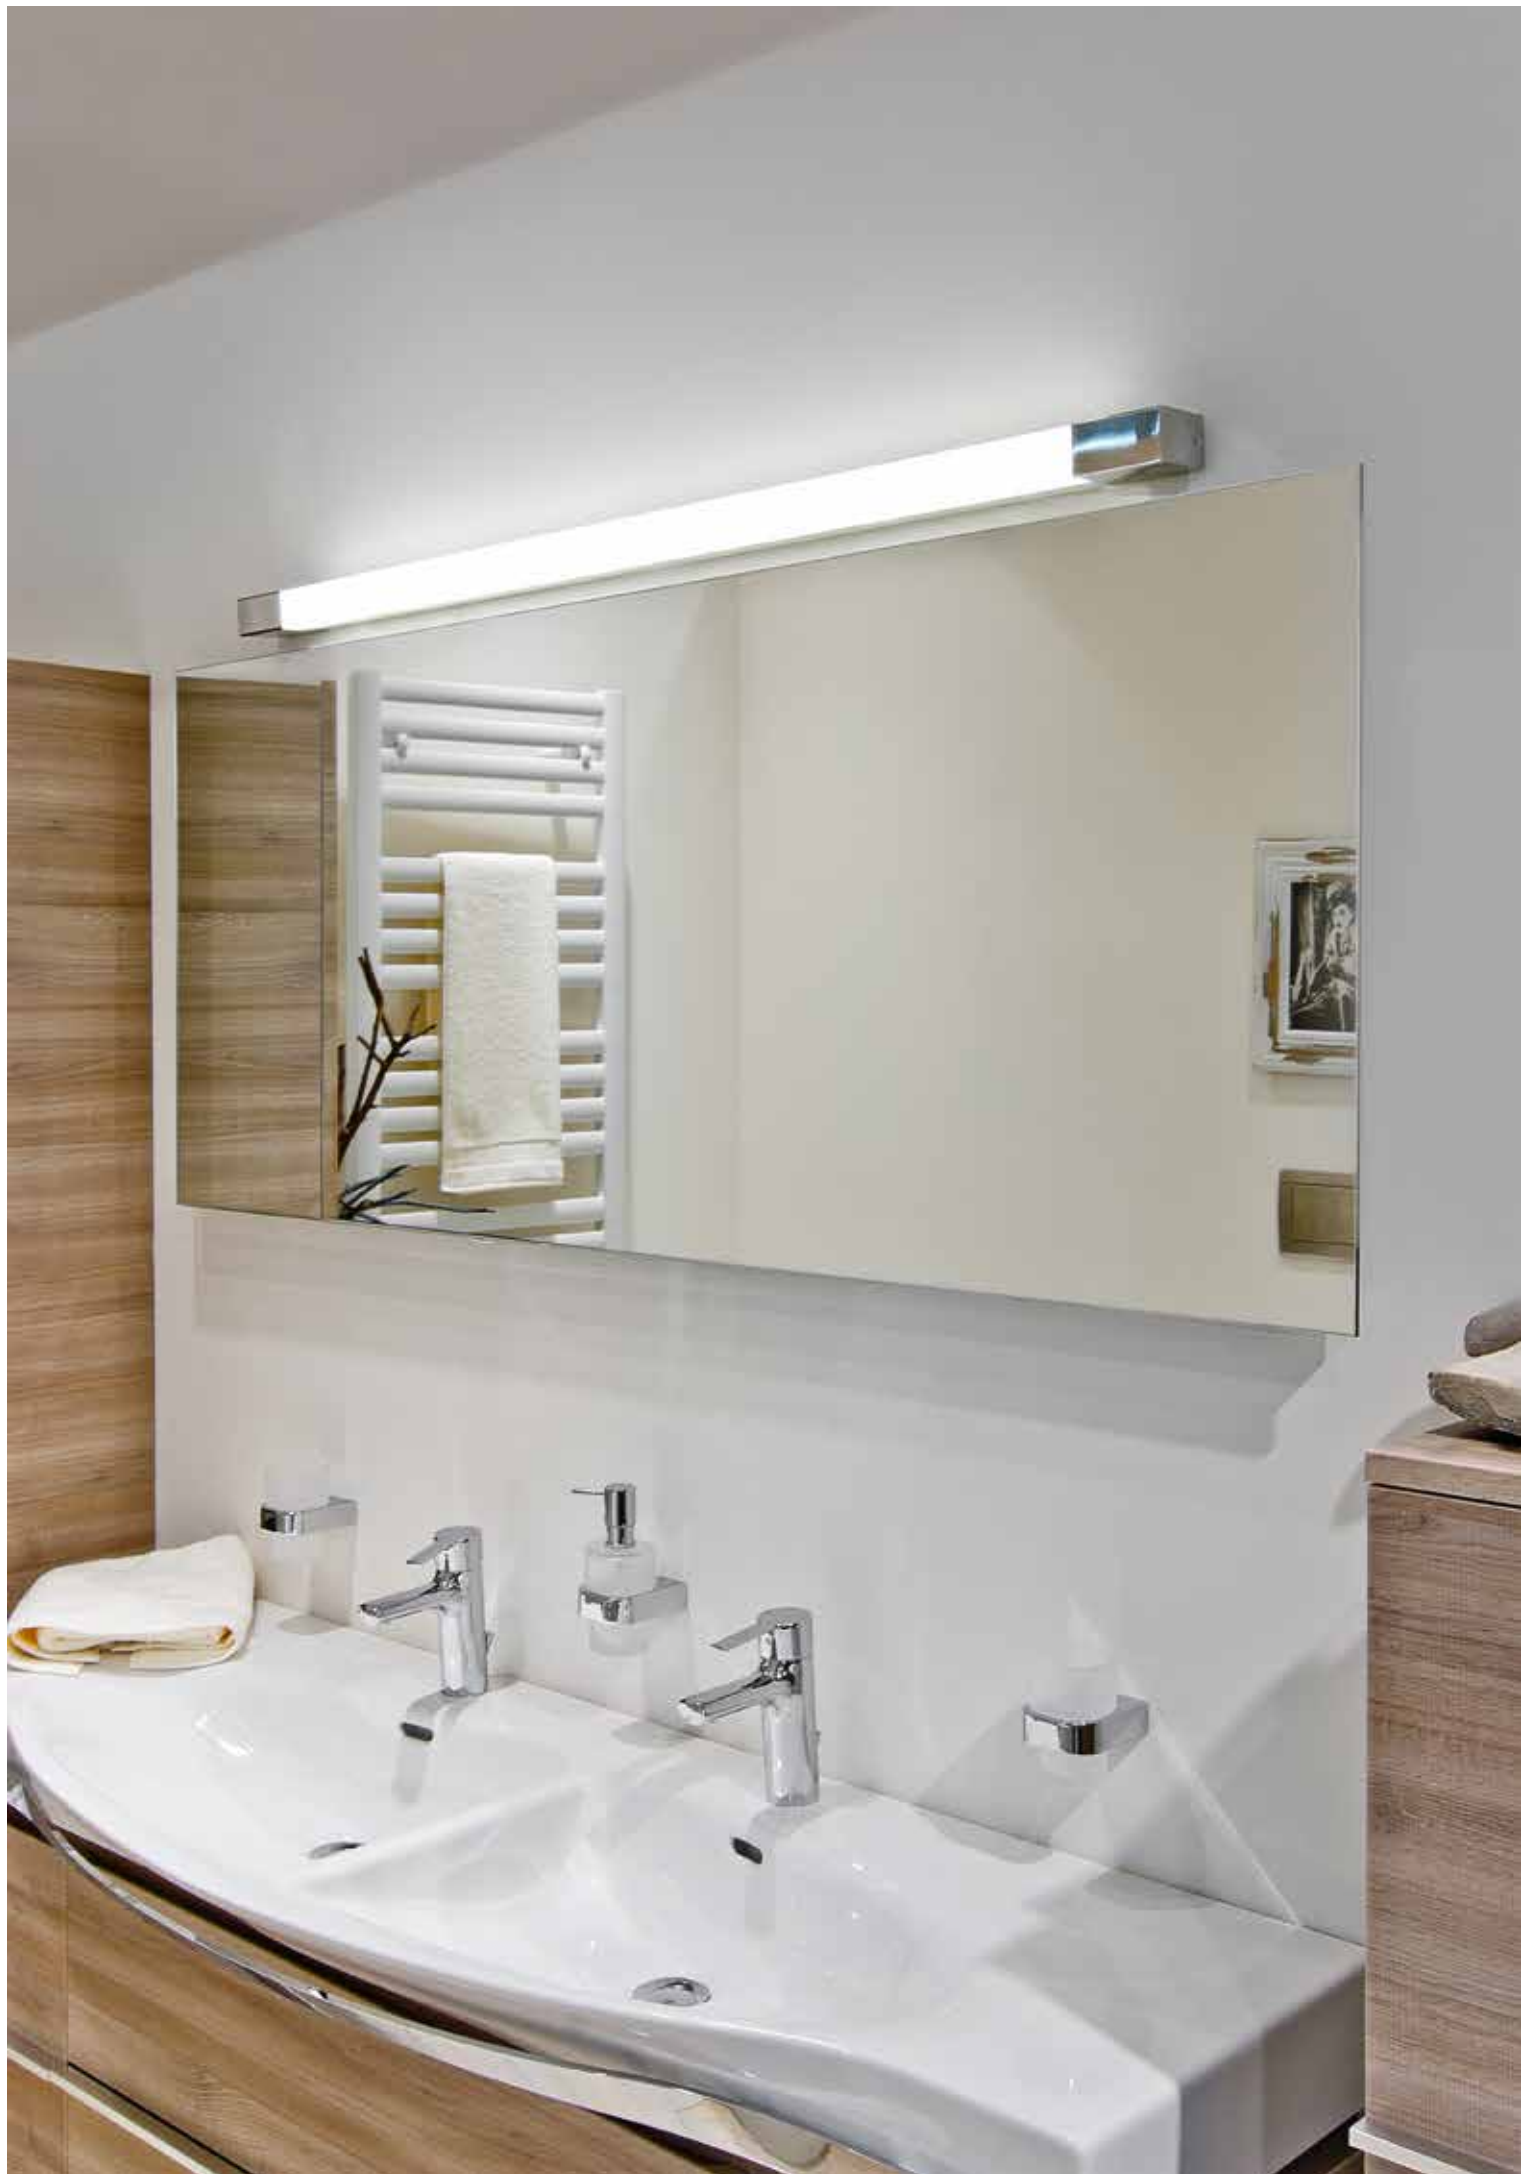

Z000M T
FLEX


LED-Leuchte 2 W mit hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, aus massivem Aluminium, mit Flexarm 300 mm, Aufbauegehäuse mit eingebautem Driver 230 V und Druckschalter

LED-luminaire 2 W with high-quality glass lens, focusable from 15° to 60°, made of aluminium, with flexi-arm 300 mm, mounting box with built-in driver 230 V and push-button switch



*

170 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
136-09-00-01	Z000M T FLEX	chrome	1x2W LED 15°-60°  3000K	incl. driver
136-09-00-33	Z000M T FLEX	platinum	1x2W LED 15°-60°  3000K	incl. driver

Z000M TQ
FLEX


LED-Leuchte 2 W mit hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, aus massivem Aluminium, mit Flexarm 300 mm, Aufbauegehäuse mit eingebautem Driver 230 V und Druckschalter

LED-luminaire 2 W with high-quality glass lens, focusable from 15° to 60°, made of aluminium, with flexi-arm 300 mm, mounting box with built-in driver 230 V and push-button switch



*

170 Lumen





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
137-09-00-01	Z000M TQ FLEX	chrome	1x2W LED 15°-60°  3000K	incl. driver
137-09-00-33	Z000M TQ FLEX	platinum	1x2W LED 15°-60°  3000K	incl. driver



Z000M TABLE

LED-Tischleuchte 2 W mit Driver 230 V, aus massivem Aluminium, mit ovalem Standfuß, Flexarm 300 mm, hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, inklusive Schalter

LED-table luminaire 2 W with driver 230 V, made of aluminium, with oval base, flexi-arm 300 mm, high-quality glass lens, focusable from 15° to 60°, including switch



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
135-09-00-05	Z000M TABLE	black	1x2W LED 15°-60° 3000K	incl. driver
135-09-00-33	Z000M TABLE	platinum	1x2W LED 15°-60° 3000K	incl. driver
135-09-00-41	Z000M TABLE	bicolor ¹	1x2W LED 15°-60° 3000K	incl. driver

¹bicolor = Standfuß + Flexarm: schwarz, Kopf: platin / ¹bicolor = base + flexi-arm: black, head: platinum



platin / platinum schwarz / black bicolor





Stufenlos fokussierbar von 15° bis 60°
continuously focusable from 15° to 60°



FLOW T FLEX

LED-Leuchte 2 W aus massivem Aluminium, mit Flexarm 300 mm, Linsenoptik 30°, Aufbaueinheit mit eingebautem Driver 230 V und Druckschalter

LED-luminaire 2 W made of aluminium, with flexi-arm 300 mm, 30° lens, mounting box with built-in driver 230 V and push-button switch





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
852-09-15-01	FLOW T FLEX	chrome	1x2W LED 30° □ 3000K	incl. driver
852-09-15-33	FLOW T FLEX	platinum	1x2W LED 30° □ 3000K	incl. driver

FLOW TQ FLEX

LED-Leuchte 2 W aus massivem Aluminium, mit Flexarm 300 mm, Linsenoptik 30°, Aufbaueinheit mit eingebautem Driver 230 V und Druckschalter

LED-luminaire 2 W made of aluminium, with flexi-arm 300 mm, 30° lens, mounting box with built-in driver 230 V and push-button switch





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
833-09-15-01	FLOW TQ FLEX	chrome	1x2W LED 30° □ 3000K	incl. driver
833-09-15-33	FLOW TQ FLEX	platinum	1x2W LED 30° □ 3000K	incl. driver


HARMONY

Wandleuchte 230 V mit Stoffschirm creme, mit oder ohne LED-Leseleuchte 2 W, Flexarm 200 mm und Linsenoptik 30°, eingebautem Driver und zwei Schaltern (getrennt schaltbar)

Wall luminaire 230 V with shade cream, with or without LED-fixture 2 W, flexi-arm 200 mm and 30° lens, including driver and two switches (separately switchable)

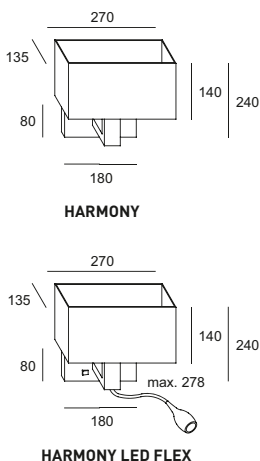

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D625	HARMONY	chrome	1x40W E27	-
D626	HARMONY LED FLEX	chrome	1x40W E27 + 1x2W LED 30° □ 3000K	incl. driver

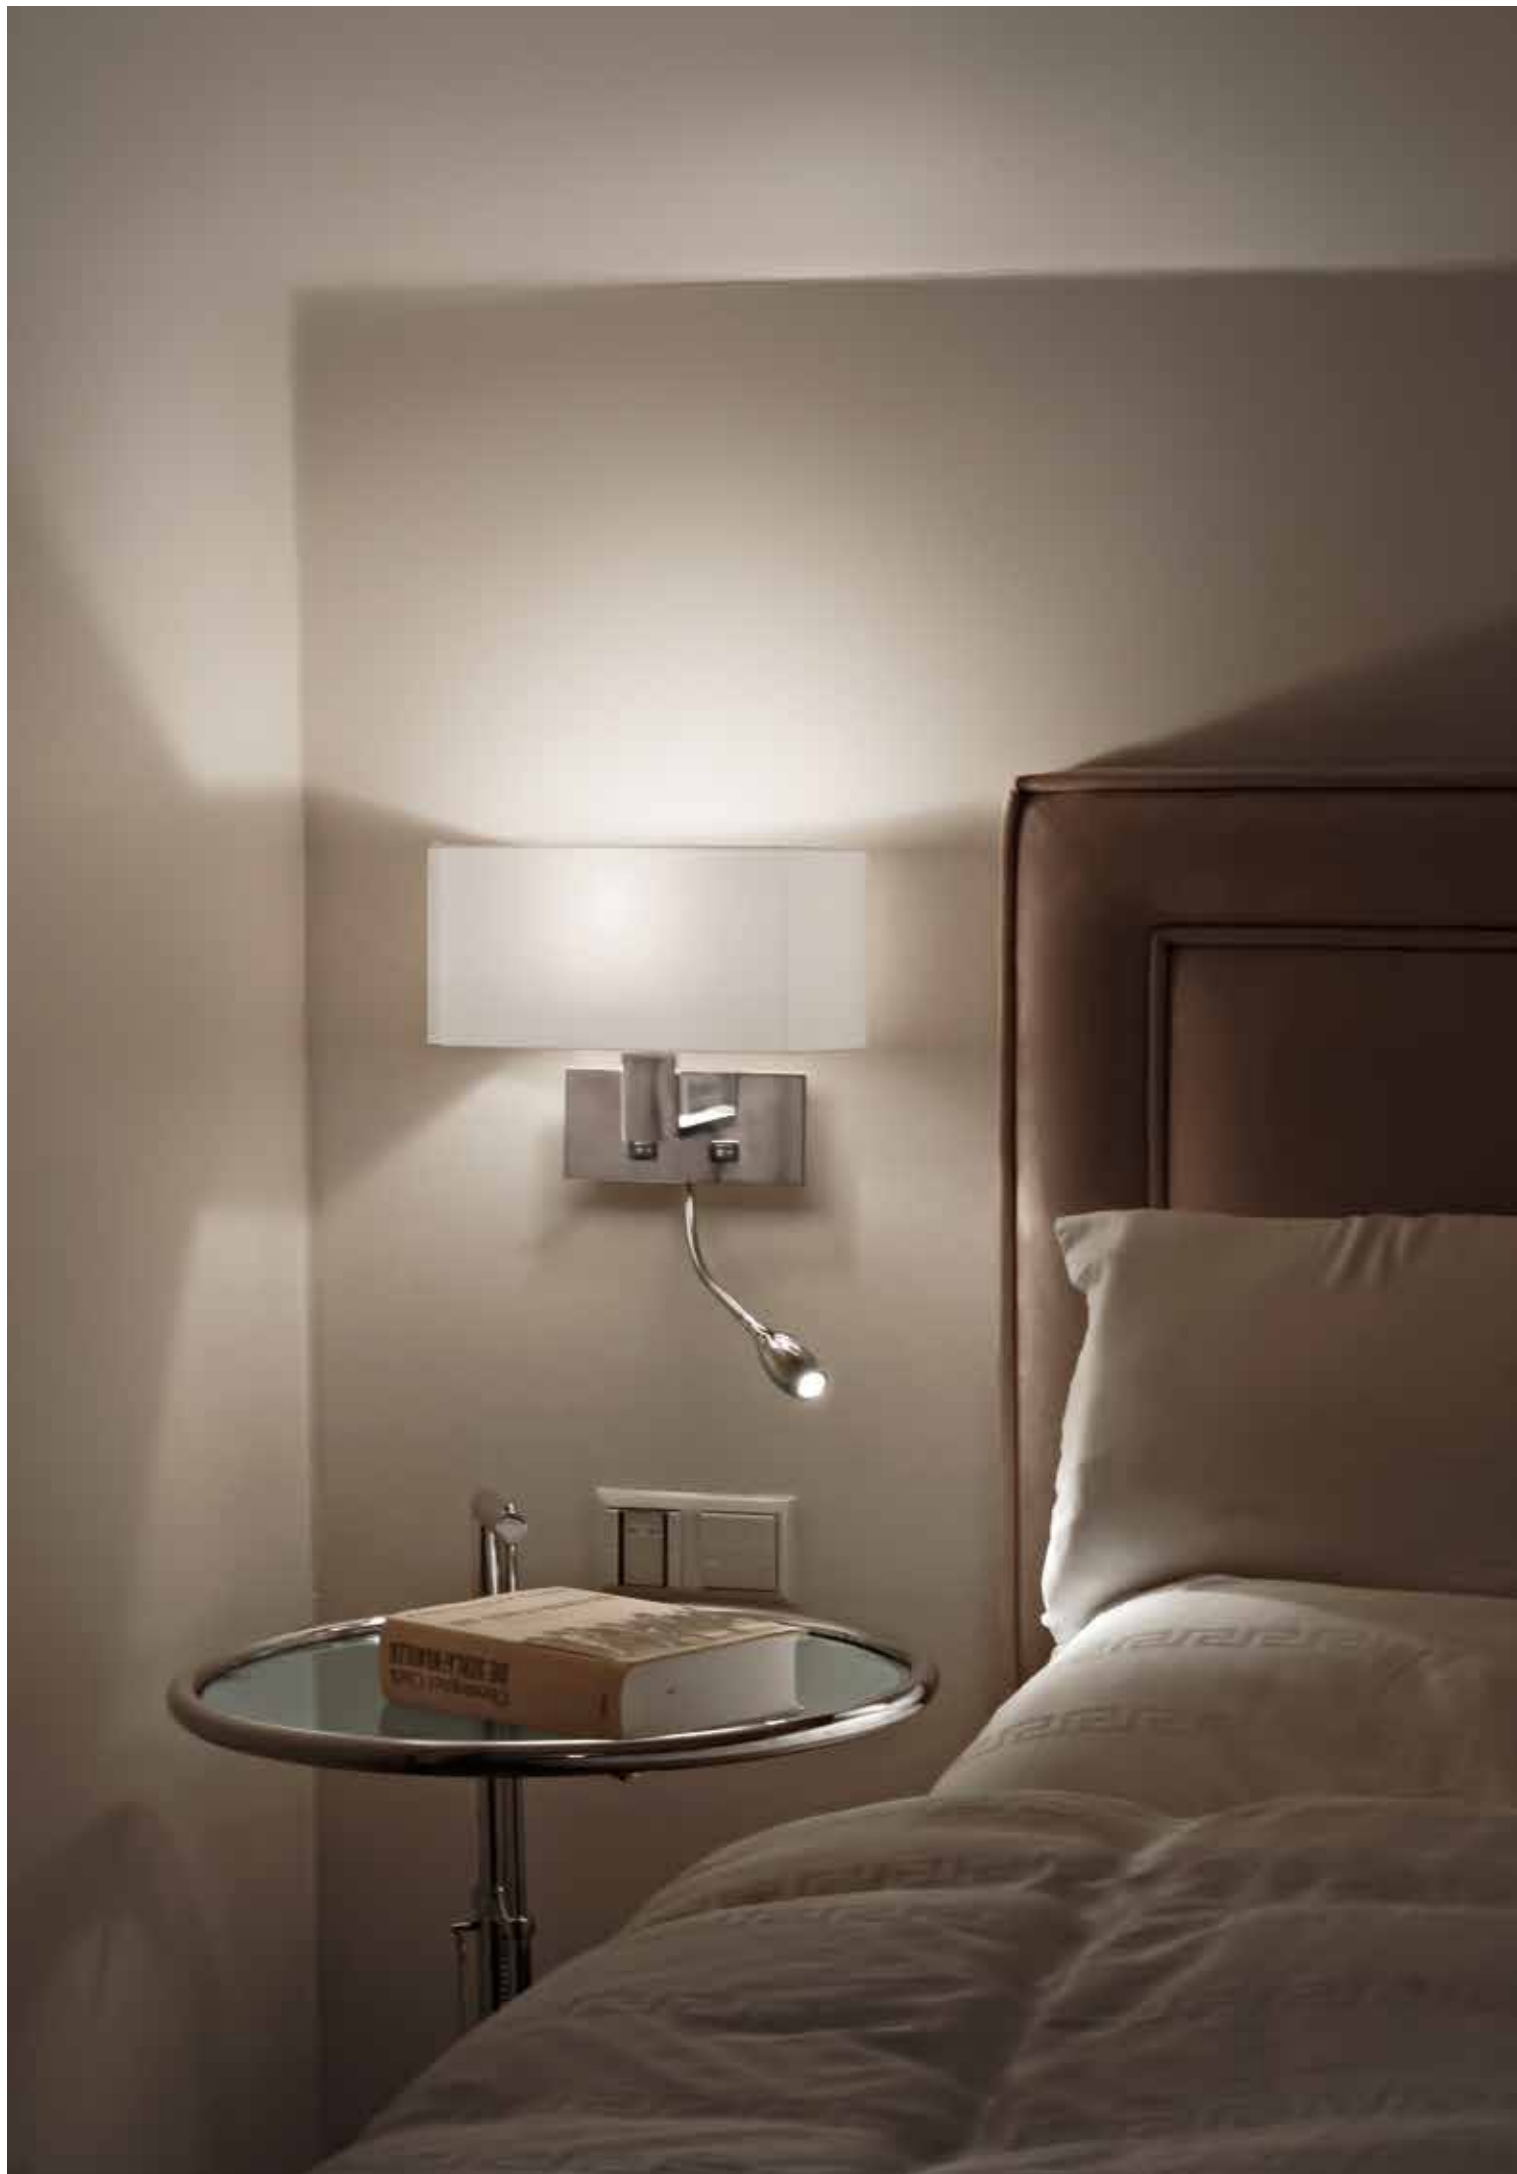

FLOW AB FLEX

LED-Leuchte 2 W aus massivem Aluminium, mit Flexarm 300 mm, Linsenoptik 30°, Aufbauplatte, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-luminaire 2 W made of aluminium, with flexi-arm 300 mm, 30° lens, surface mounted, please order driver separately (see page 156 ff.)



*

170 Lumen

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
842-09-15-01	FLOW AB FLEX	chrome	1x2W LED 30° 3000K 500mA	excl. driver
842-09-15-33	FLOW AB FLEX	platinum	1x2W LED 30° 3000K 500mA	excl. driver

FLOW AB FLEX SWITCH

LED-Leuchte 2 W aus massivem Aluminium, mit Flexarm 300 mm, Linsenoptik 30°, Einbauplatte und Druckschalter, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-luminaire 2 W made of aluminium, with flexi-arm 300 mm, 30° lens, surface mounted and push-button switch, please order driver separately (see page 156 ff.)



*


170 Lumen

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
862-09-15-01	FLOW AB FLEX SWITCH	chrome	1x2W LED 30° 3000K 500mA	excl. driver	20 mm
862-09-15-33	FLOW AB FLEX SWITCH	platinum	1x2W LED 30° 3000K 500mA	excl. driver	20 mm

H = Einbautiefe / recessed depth

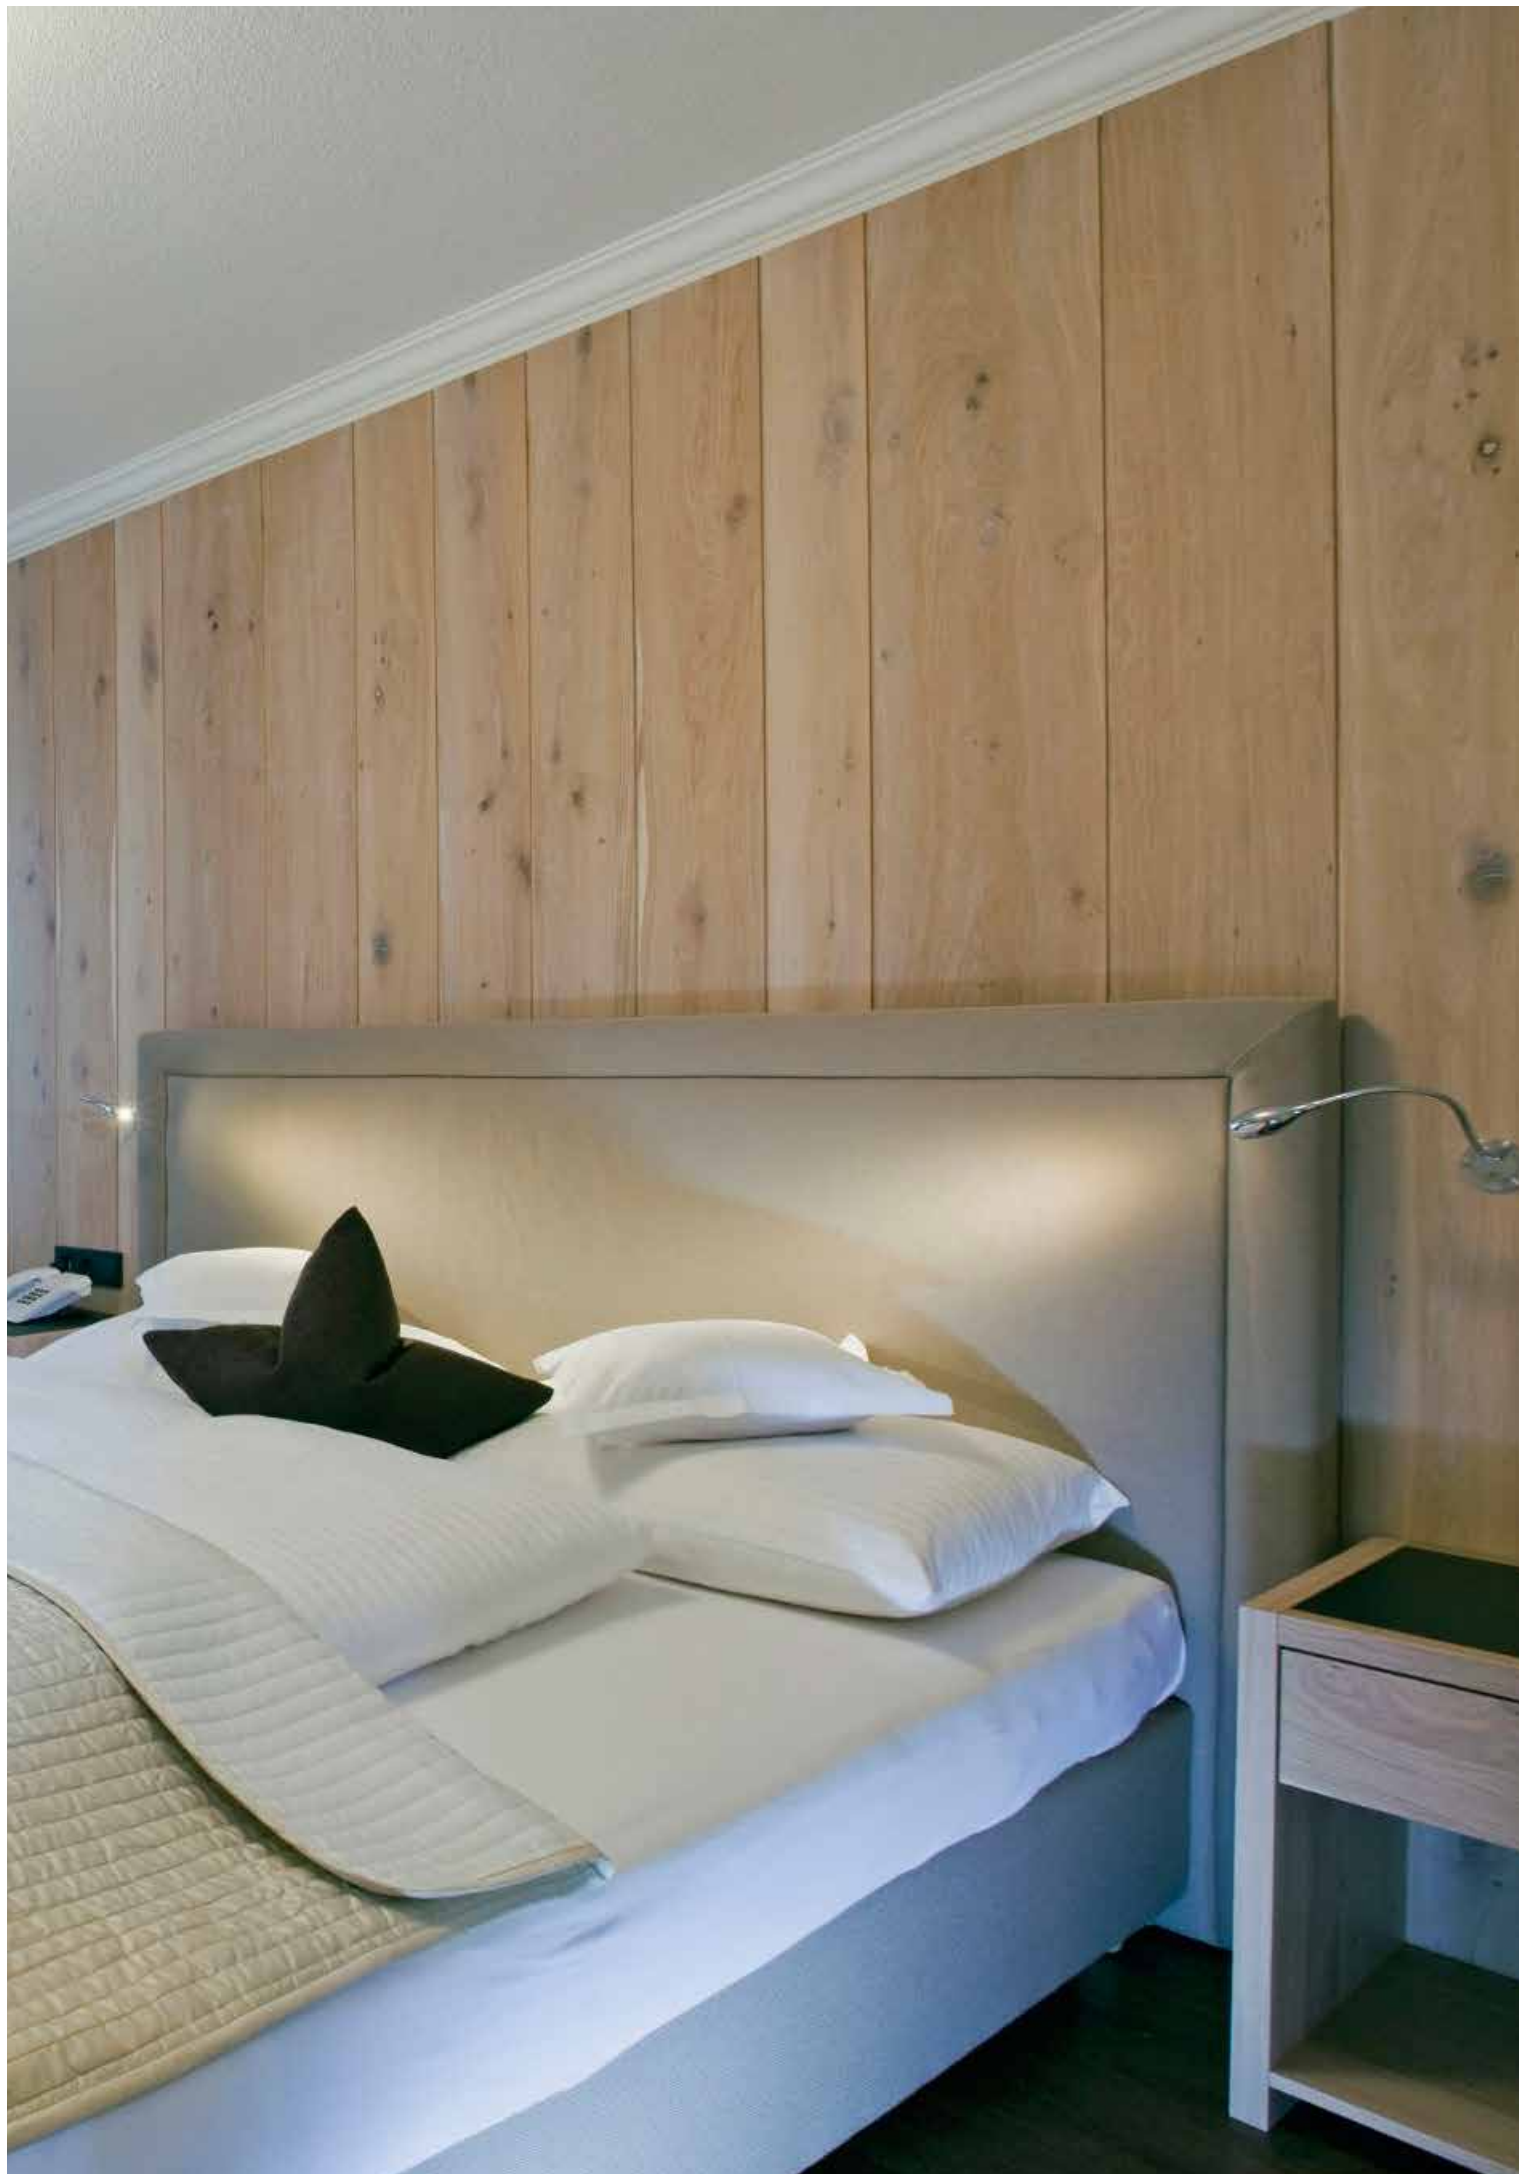

FLOW AB DS

LED-Leuchte 2 W aus massivem Aluminium, dreh- und schwenkbar (270°/90°), Lin senoptik 30°, Aufbauplatte, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-luminaire 2 W made of aluminium, adjustable (270°/90°), with 30° lens, surface mounted, please order driver separately (see page 156 ff.)

A++-A

*

170 Lumen

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
822-09-15-01	FLOW AB DS	chrome	1x2W LED 30° 3000K 500mA	excl. driver
822-09-15-33	FLOW AB DS	platinum	1x2W LED 30° 3000K 500mA	excl. driver

HYDRA

LED-Leuchte 3 W aus massivem Aluminium, dreh- und schwenkbar (350°/90°), Aufbauplatte, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-luminaire 3 W made of aluminium, adjustable (350°/90°), surface mounted, please order driver separately (see page 156 ff.)

A++-A

*

3000K: 305 Lumen

4000K: 320 Lumen

dim




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
493-09-00-01	HYDRA	chrome	1x3W LED 120° 3000K 350mA	excl. driver
493-09-00-33	HYDRA	platinum	1x3W LED 120° 3000K 350mA	excl. driver
493-05-00-01	HYDRA	chrome	1x3W LED 120° 4000K 350mA	excl. driver
493-05-00-33	HYDRA	platinum	1x3W LED 120° 4000K 350mA	excl. driver



CLIPPO

LED-Wand- und Deckenstrahler
14 W mit hochwertigem Alumi-
niumreflektor und eingebautem
Driver 230 V, dimmbar mit
Phasenanschnitt-/Phasen-
abschnittdimmer, aus massi-
vem Aluminium, drehbar und
schwenkbar (350°/90°)

LED-wall and ceiling luminaire
14 W with high value aluminium
reflector and built-in driver 230 V,
dimmable with phase control/
phase cutting, made of alumi-
nium, adjustable (350°/90°)



2700K: 1100 Lumen

3000K: 1360 Lumen

*

dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D775	CLIPPO	white	1x14W LED 32° 2700K	incl. driver phase dim
D777	CLIPPO	white	1x14W LED 32° 3000K	incl. driver phase dim







PIPER S

LED-Deckenleuchte 7 W
mit eingebautem Driver 230 V,
aus massivem Aluminium
mit Acrylglasabdeckung

LED-ceiling luminaire 7 W
with built-in driver 230 V,
made of aluminium with
acrylic glass cover





dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D252	PIPER S	white	1x7W LED 3000K	incl. driver
D752	PIPER S dim	white	1x7W LED 3000K	incl. driver phase dim

PIPER

LED-Deckenleuchte 15 W
mit eingebautem Driver 230 V,
aus massivem Aluminium
mit Acrylglasabdeckung

LED-ceiling luminaire 15 W
with built-in driver 230 V,
made of aluminium with
acrylic glass cover





dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D253	PIPER	white	1x15W LED 3000K	incl. driver
D753	PIPER dim	white	1x15W LED 3000K	incl. driver phase dim

HANGING PIPER

LED-Hängeleuchte 15 W
mit eingebautem Driver 230 V,
aus massivem Aluminium mit
Acrylglasabdeckung, Kabel
kürzbar

LED-pendant 15 W with
built-in driver 230 V, made
of aluminium with acrylic
glass cover, cable may be
cut to any length

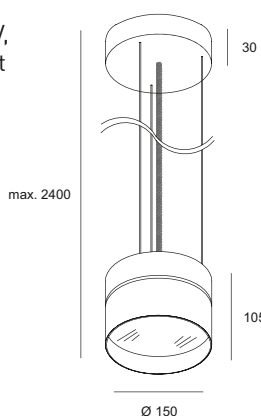

dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D211	HANGING PIPER	white	1x15W LED 3000K	incl. driver
D711	HANGING PIPER dim	white	1x15W LED 3000K	incl. driver phase dim



ZOOM XL

LED-Strahler 4,1 W mit Aufbaugehäuse und eingebautem Driver 230 V, hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, dreh- und schwenkbar (360°/120°)

LED-fixture 4,1 W surface mounted, with built-in driver 230 V, high-quality glass lens, focusable from 15° to 60°, adjustable (360°/120°)




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
134-09-00-01T	ZOOM XL	chrome	1x4,1W LED 15°-60° 3000K	incl. driver
134-09-00-03T	ZOOM XL	white	1x4,1W LED 15°-60° 3000K	incl. driver
134-09-00-05T	ZOOM XL	black	1x4,1W LED 15°-60° 3000K	incl. driver
134-09-00-33T	ZOOM XL	platinum	1x4,1W LED 15°-60° 3000K	incl. driver

LED in 4000K auf Anfrage / 4000K LED on request

ZOOM XL

LED-Strahler 4,1 W mit Einbauplate, hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, dreh- und schwenkbar (360°/120°), Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-fixture 4,1 W with recessed plate, high-quality glass lens, focusable from 15° to 60°, adjustable (360°/120°), please order driver separately (see page 156 ff.)



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
134-09-00-01EP	ZOOM XL	chrome	1x4,1W LED 15°-60° 3000K 250mA	excl. driver	45 mm
134-09-00-03EP	ZOOM XL	white	1x4,1W LED 15°-60° 3000K 250mA	excl. driver	45 mm
134-09-00-05EP	ZOOM XL	black	1x4,1W LED 15°-60° 3000K 250mA	excl. driver	45 mm
134-09-00-33EP	ZOOM XL	platinum	1x4,1W LED 15°-60° 3000K 250mA	excl. driver	45 mm

LED in 4000K auf Anfrage / 4000K LED on request

H = Einbautiefe / recessed depth



ZOOM XL: fokussierbar von 15° bis 60°
ZOOM XL: focusable from 15° to 60°




ZOOM XL Stellung 15° ZOOM XL Stellung 60°
ZOOM XL position 15° ZOOM XL position 60°



LIGHT HOUSE 1

LED-Deckenstrahler 9,3 W mit hochwertigem Aluminiumreflektor und eingebautem Driver 230 V, aus massivem Aluminium, LED kardanisch gelagert

LED-ceiling luminaire 9,3 W with high value aluminium reflector and built-in driver 230 V, made of aluminium, LED gimbal mounted



995 Lumen


dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D794	LIGHT HOUSE 1	white	1x9,3W LED 32° 2700K	incl. driver
D994	LIGHT HOUSE 1 dim	white	1x9,3W LED 32° 2700K	incl. driver phase dim

LIGHT HOUSE 2

2-fach LED-Deckenstrahler 2x9,3 W mit hochwertigem Aluminiumreflektor und eingebautem Driver 230 V, aus massivem Aluminium, LED kardanisch gelagert


Double LED-ceiling luminaire 2x9,3 W with high value aluminium reflector and built-in driver 230 V, made of aluminium, LED gimbal mounted



2x 995 Lumen

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D796	LIGHT HOUSE 2	white	2x9,3W LED 32° 2700K	incl. driver
D996	LIGHT HOUSE 2 dim	white	2x9,3W LED 32° 2700K	incl. driver phase dim

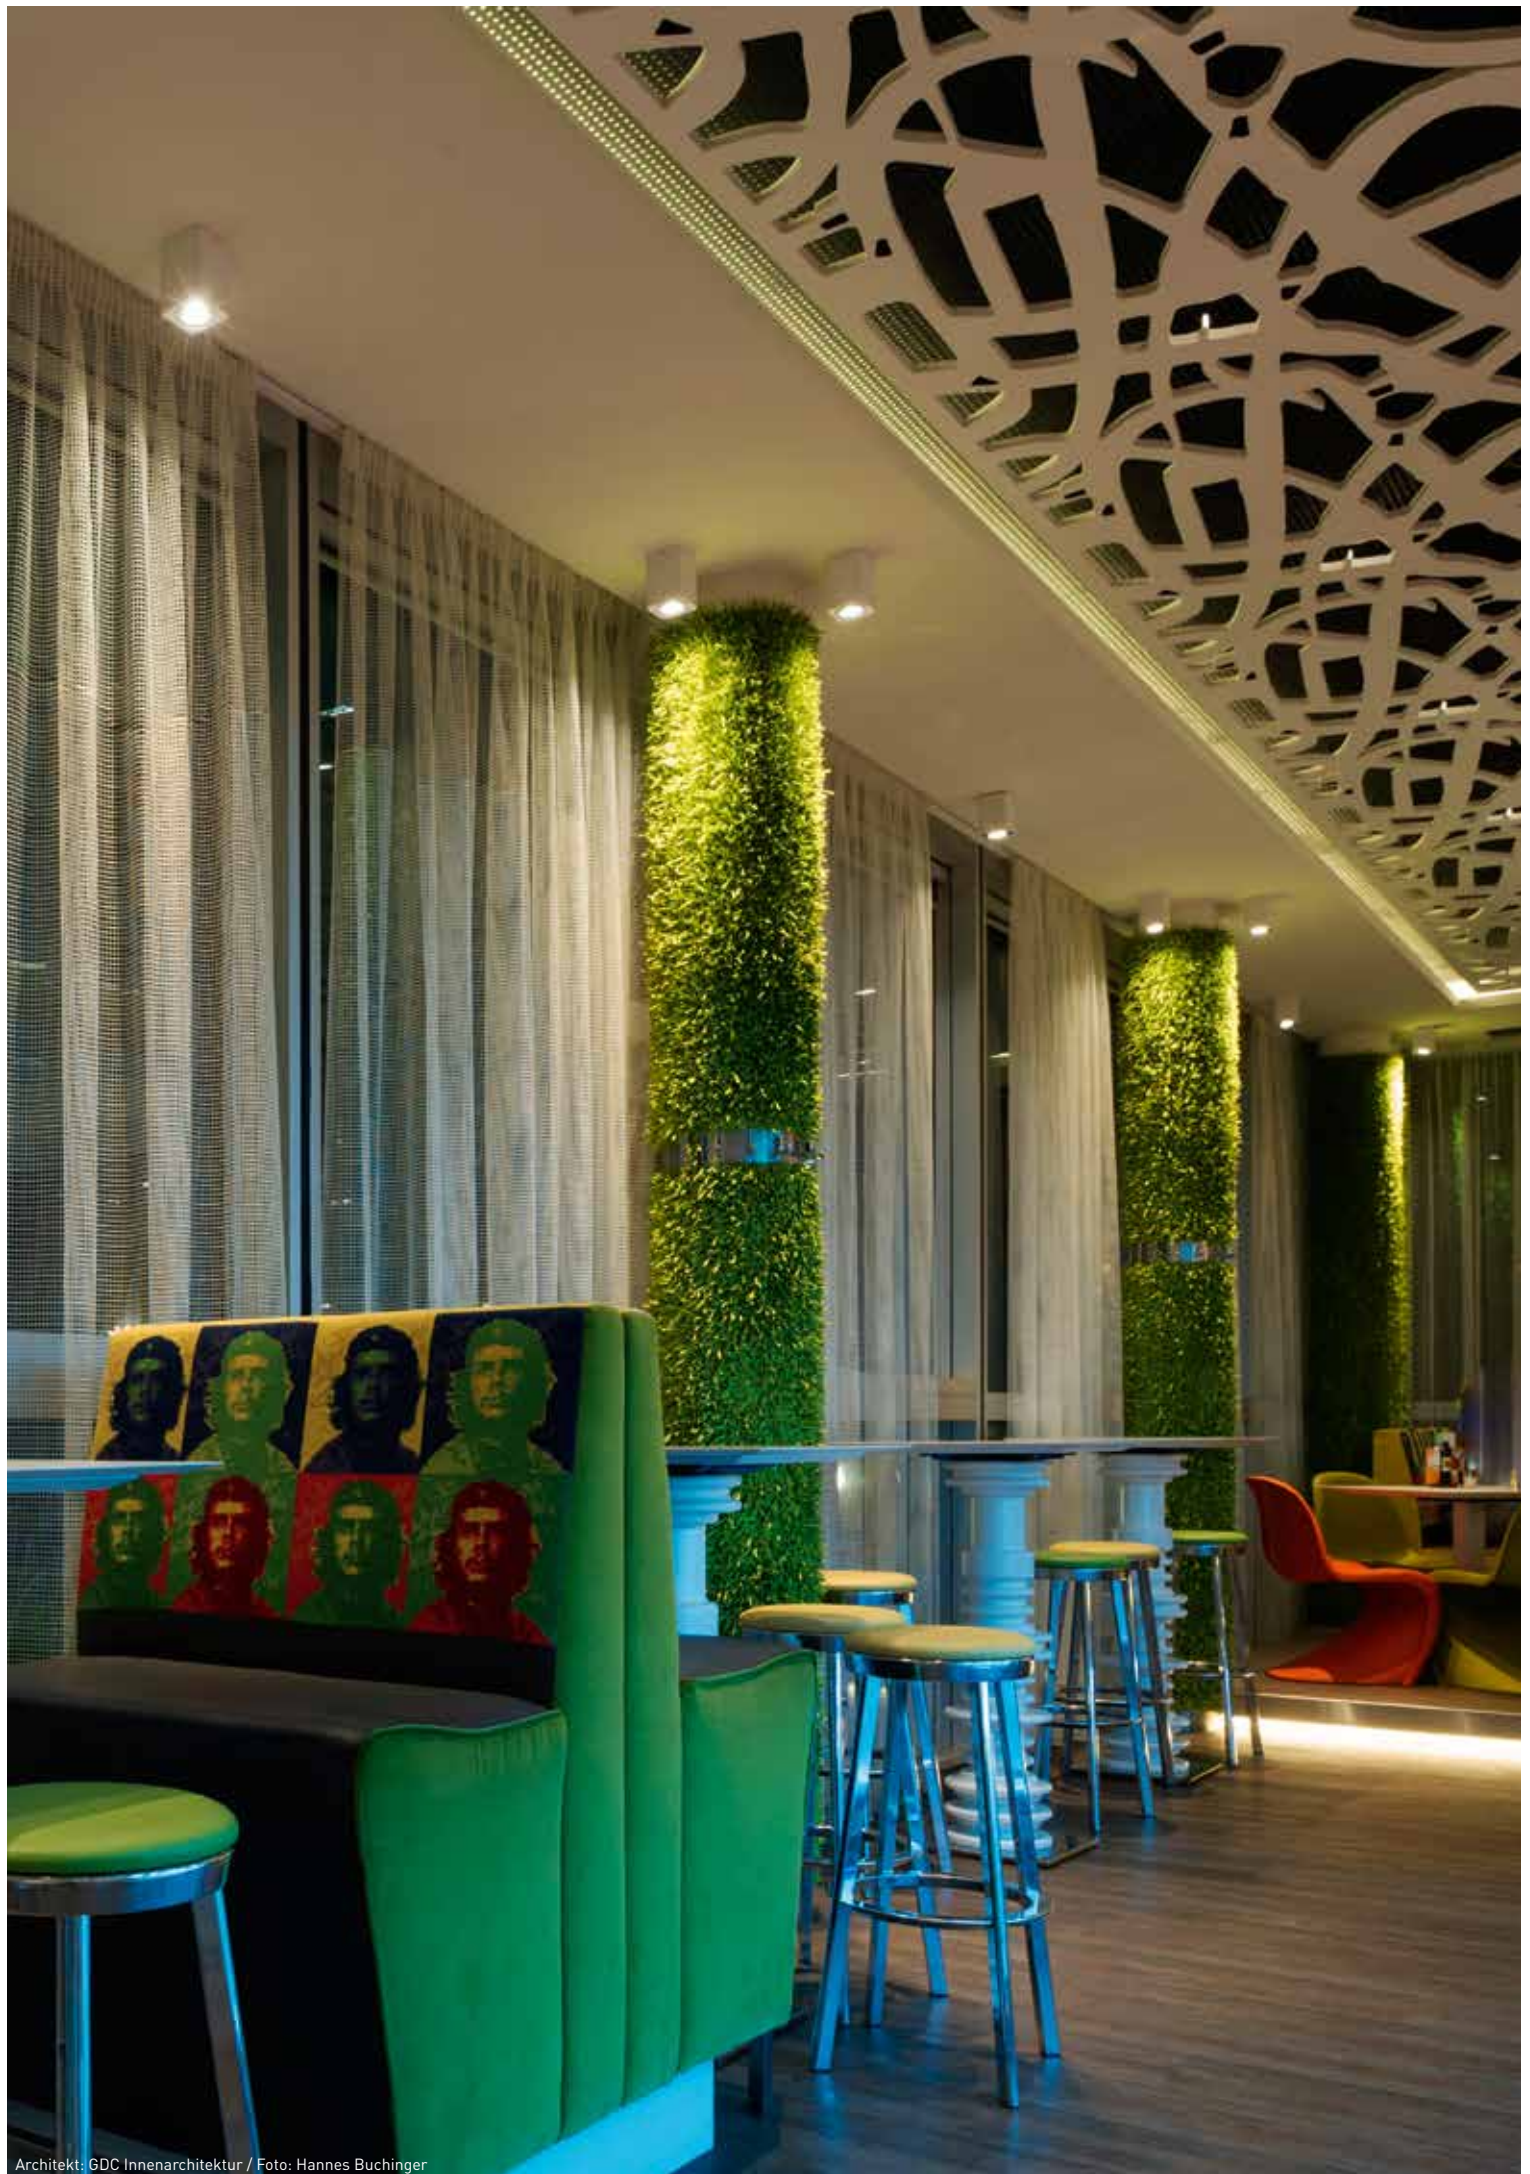

**LIGHT BOX
SOFT 1**

Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D374	LIGHT BOX SOFT 1	white	1x50W/GU10	-
D385	LIGHT BOX SOFT 1	black	1x50W/GU10	-

**LIGHT BOX
SOFT 2**

2-fach Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Double ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D375	LIGHT BOX SOFT 2	white	2x50W/GU10	-
D386	LIGHT BOX SOFT 2	black	2x50W/GU10	-

**LIGHT BOX
SOFT 3**

3-fach Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Triple ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D376	LIGHT BOX SOFT 3	white	3x50W/GU10	-
D387	LIGHT BOX SOFT 3	black	3x50W/GU10	-



LIGHT BOX 1

Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED



*


dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D361	LIGHT BOX 1	grey	1x35W/GU10	-
D371	LIGHT BOX 1	white	1x35W/GU10	-

LIGHT BOX 2

2-fach Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Double ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED



*


dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D362	LIGHT BOX 2	grey	2x35W/GU10	-
D372	LIGHT BOX 2	white	2x35W/GU10	-

LIGHT BOX 3

3-fach Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Triple ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED



*



dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D363	LIGHT BOX 3	grey	3x35W/GU10	-
D373	LIGHT BOX 3	white	3x35W/GU10	-

LIGHT BOX 4

4-fach Deckenstrahler 230 V
aus massivem Aluminium,
Leuchtmittel kardanisch
gelagert, verwendbar für
230 V Halogen und LED

Quad ceiling luminaire 230 V
made of aluminium, illuminant
gimbal mounted, usable for
230 V halogen and LED






CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D360	LIGHT BOX 4	grey	4x35W/GU10	-
D370	LIGHT BOX 4	white	4x35W/GU10	-



STYLE Q

Wand- und Deckenstrahler 230 V aus massivem Aluminium natur gebürstet, schwenkbar (2 x 90°), verwendbar für 230 V Halogen und LED, auch mit 3-Phasen-Universaladapter erhältlich

Wall and ceiling luminaire 230 V made of natural brushed aluminium, adjustable (2 x 90°), usable for 230 V halogen and LED, also available with 3-phase universal adapter

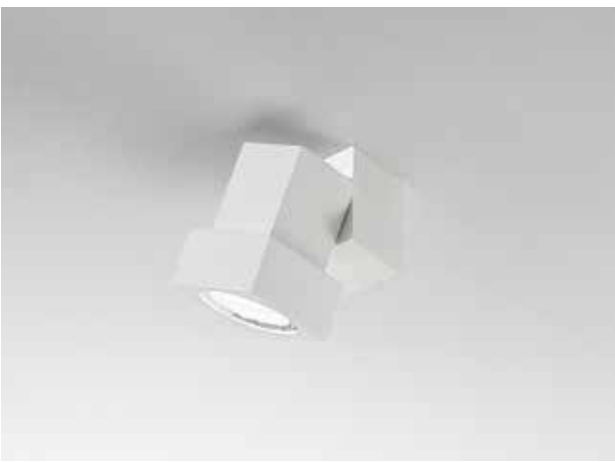



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D332	STYLE Q	alu	1x50W/GU10	-
D333	STYLE Q	white	1x50W/GU10	-
D392	STYLE Q adapter black	alu	1x50W/GU10	-
D393	STYLE Q adapter white	white	1x50W/GU10	-

STYLE Q DUO

Wand- und Deckenstrahler 230 V aus massivem Aluminium natur gebürstet, schwenkbar (2 x 90°), verwendbar für 230 V Halogen und LED, auch mit 3-Phasen-Universaladapter erhältlich

Wall and ceiling luminaire 230 V made of natural brushed aluminium, adjustable (2 x 90°), usable for 230 V halogen and LED, also available with 3-phase universal adapter



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D334	STYLE Q DUO	alu	2x50W/GU10	-
D335	STYLE Q DUO	white	2x50W/GU10	-
D394	STYLE Q DUO adapter black	alu	2x50W/GU10	-
D395	STYLE Q DUO adapter white	white	2x50W/GU10	-



STYLE Q mit 3-Phasen-Universaladapter
STYLE Q with 3-phase universal adapter



STYLE Q DUO mit 3-Phasen-Universaladapter
STYLE Q DUO with 3-phase universal adapter

ACCESSORIES



Montageplatte (optional) für STYLE- und STYLE Q-Strahler
Mounting plate (optional) for STYLE- and STYLE Q-luminaires

CODE	TYPE	COLOUR
D133	STYLE MOUNTING PLATE	alu
D134	STYLE MOUNTING PLATE	white







STYLE DUO

Wand- und Deckenstrahler 230 V aus massivem Aluminium natur gebürstet, schwenkbar (2 x 90°), verwendbar für 230 V Halogen und LED, auch mit 3-Phasen-Universaladapter erhältlich

Wall and ceiling luminaire 230 V made of natural brushed aluminium, adjustable (2 x 90°), usable for 230 V halogen and LED, also available with 3-phase universal adapter



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D344	STYLE DUO	alu	2x50W/GU10	-
D300	STYLE DUO adapter black	alu	2x50W/GU10	-



STYLE DUO mit 3-Phasen-Universaladapter
STYLE DUO with 3-phase universal adapter


ACCESSORIES



Montageplatte (optional) für STYLE- und STYLE Q-Strahler
Mounting plate (optional) for STYLE- and STYLE Q-luminaires

CODE	TYPE	COLOUR
D133	STYLE MOUNTING PLATE	alu
D134	STYLE MOUNTING PLATE	white



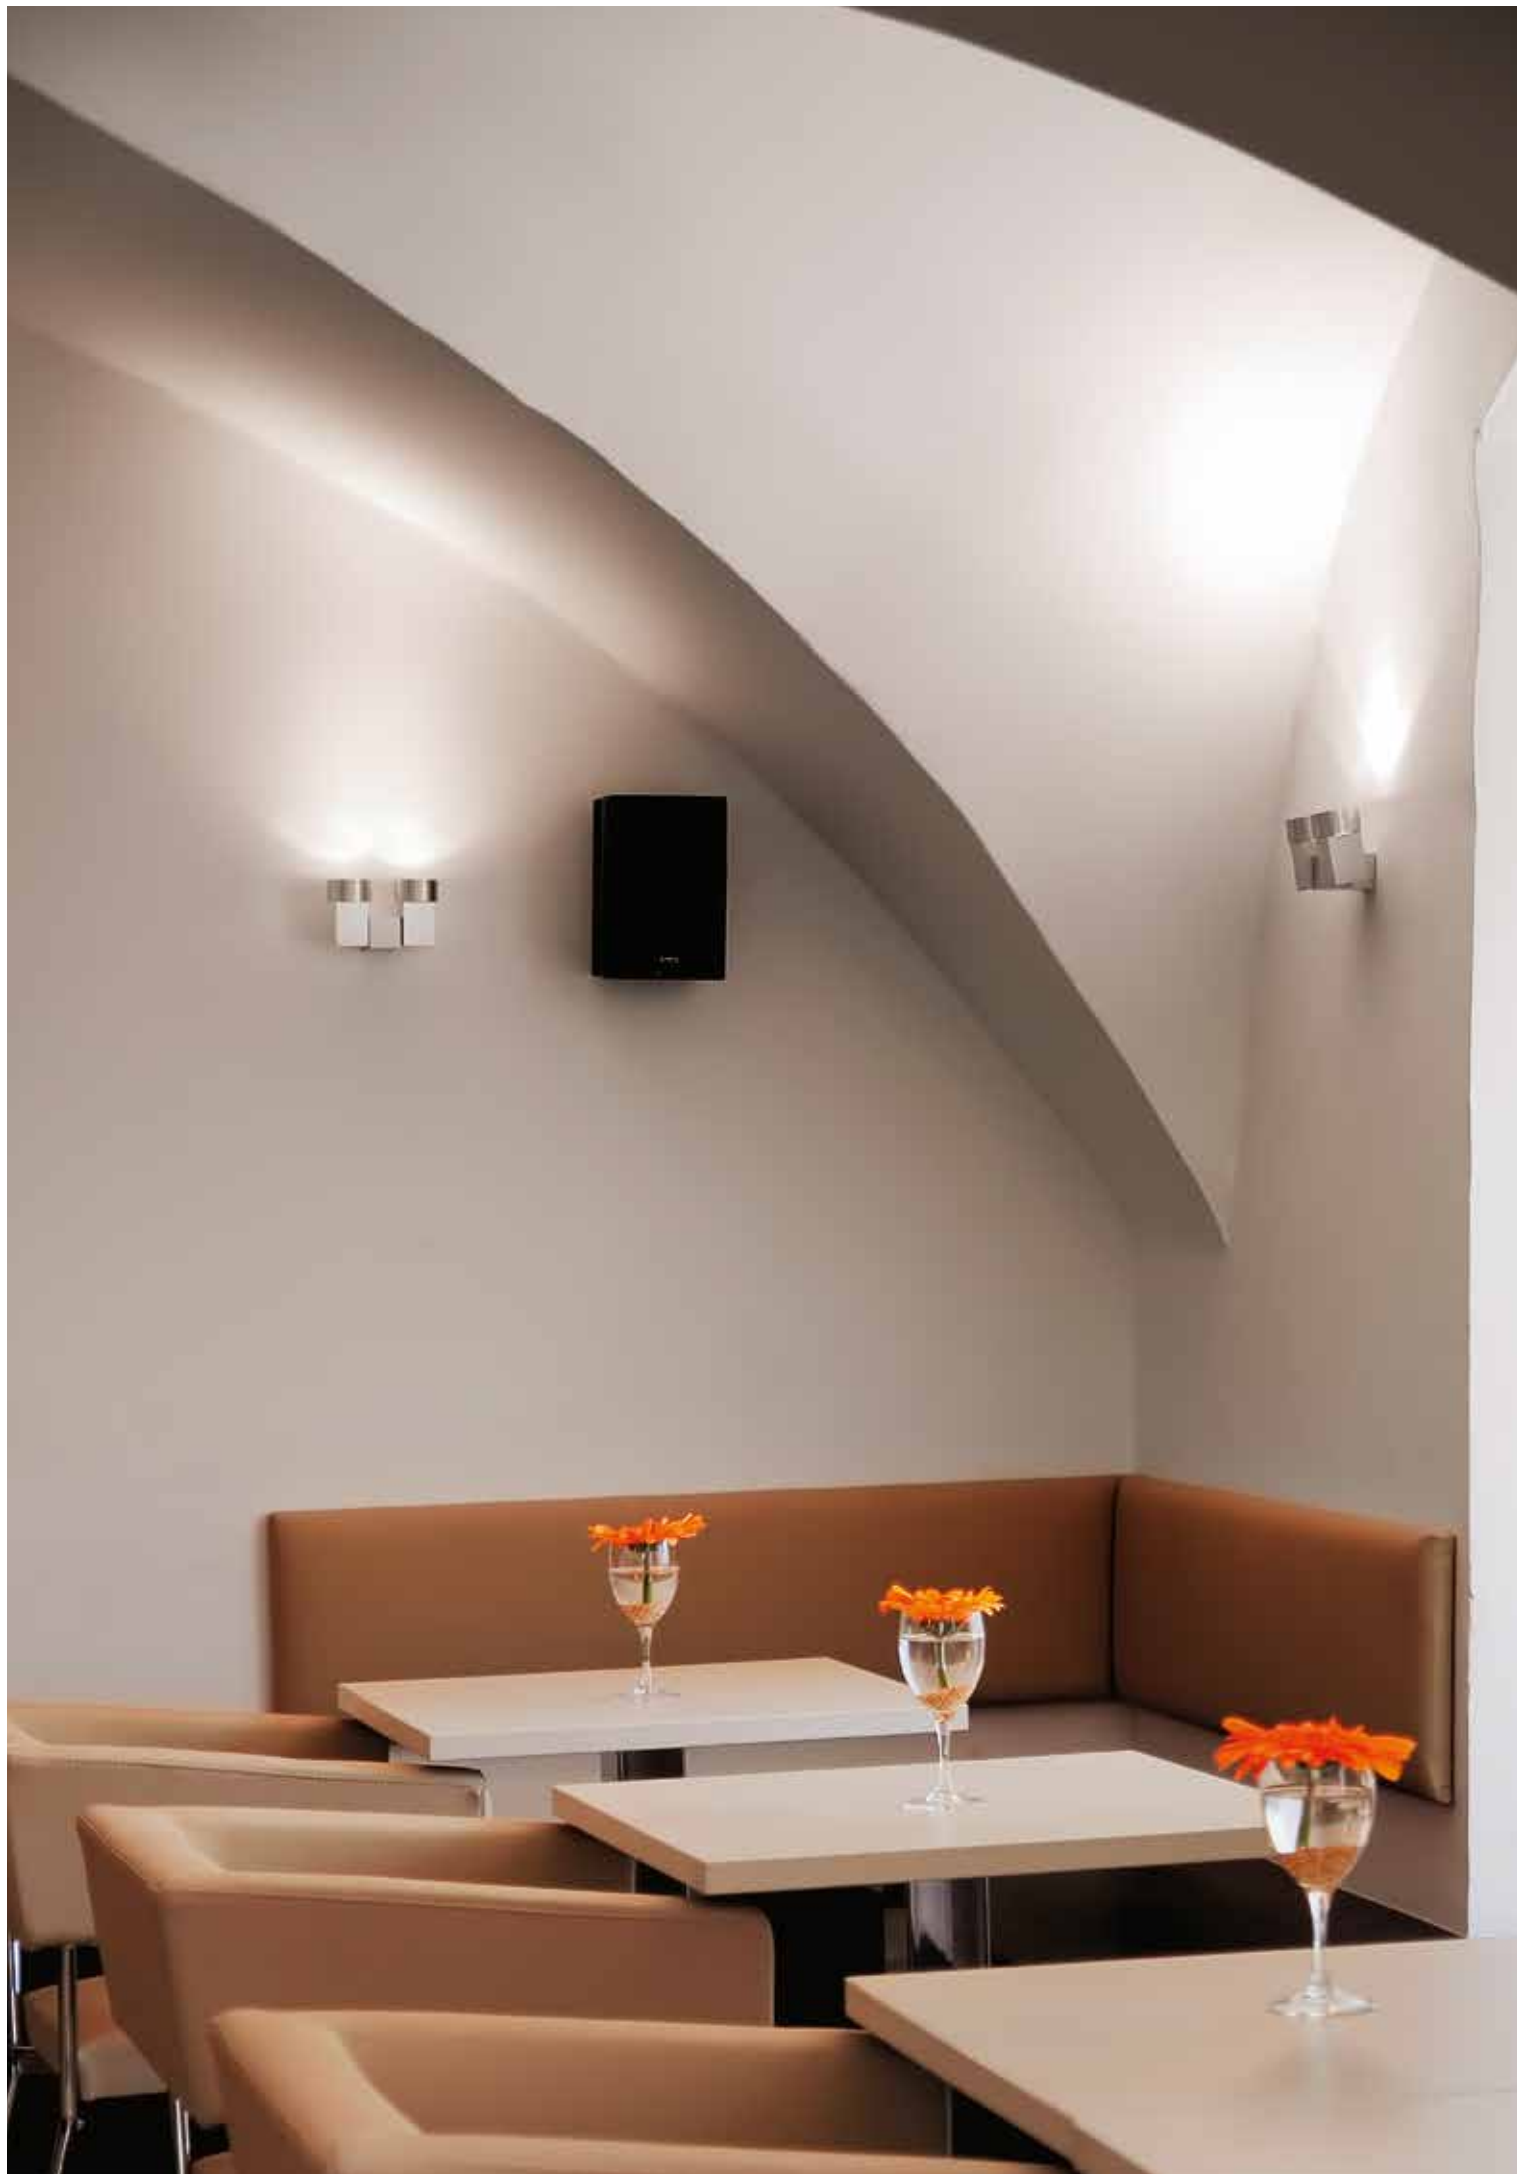

NEWTON 35

LED-Aufbaustrahler 230 V, mit 5 W AC-LED, hochwertigem Aluminiumreflektor, mit spezieller Glasabdeckung, Anschlussklemme extern, für den Innen- und Außenbereich verwendbar, IP54

LED-luminaire 230 V, with 5 W AC-LED, high value aluminium reflector, with special glass cover, connector external, to be used in indoor and outdoor areas, IP54




A** - A

*

330 Lumen

IP54

230V LED



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D748	NEWTON 35	white	1x5W LED 25° 3000K	230 V
D788	NEWTON 35	grey	1x5W LED 25° 3000K	230 V

NEWTON 55

LED-Aufbaustrahler 230 V, mit 5 W AC-LED, hochwertigem Aluminiumreflektor, mit spezieller Glasabdeckung, für den Innen- und Außenbereich verwendbar, IP54

LED-luminaire 230 V, with 5 W AC-LED, high value aluminium reflector, with special glass cover, to be used in indoor and outdoor areas, IP54





A** - A

*

330 Lumen

IP54

230V LED




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D948	NEWTON 55	white	1x5W LED 25° 3000K	230 V
D988	NEWTON 55	grey	1x5W LED 25° 3000K	230 V



KUBUS

Deckenleuchte 230 V aus stranggepresstem Aluminium mit tiefer gesetztem Leuchtmittel und geringem indirekten Lichtanteil, verwendbar für 230 V Halogen und LED

Ceiling luminaire 230 V of extruded aluminium with recessed illuminant and low indirect lighting, usable for 230 V halogen and LED



dim




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D521	KUBUS	grey	1x50W/GU10	-
D522	KUBUS	white	1x50W/GU10	-
D523	KUBUS	black	1x50W/GU10	-

FLEUR

Deckenstrahler 230 V aus massivem Aluminium natur gebürstet, verwendbar für 230 V Halogen und LED, für den Innen- und Außenbereich geeignet, IP54

Ceiling luminaire 230 V made of natural brushed aluminium, usable for 12 V or 230 V halogen and LED, to be used in indoor and outdoor areas, IP54



IP54

dim




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D349	FLEUR	alu	1x35W/GU10	-

CL 15

Deckenstrahler 230 V aus Aluminium, verwendbar für 230 V Halogen und LED, für den Innen- und Außenbereich geeignet, IP44

Ceiling luminaire for 230 V halogen or LED, made of aluminium, usable for 230 V halogen and LED, to be used in indoor and outdoor areas, IP44




IP44

dim





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D351	CL 15	grey	1x50W/E27	-
D352	CL 15	white	1x50W/E27	-

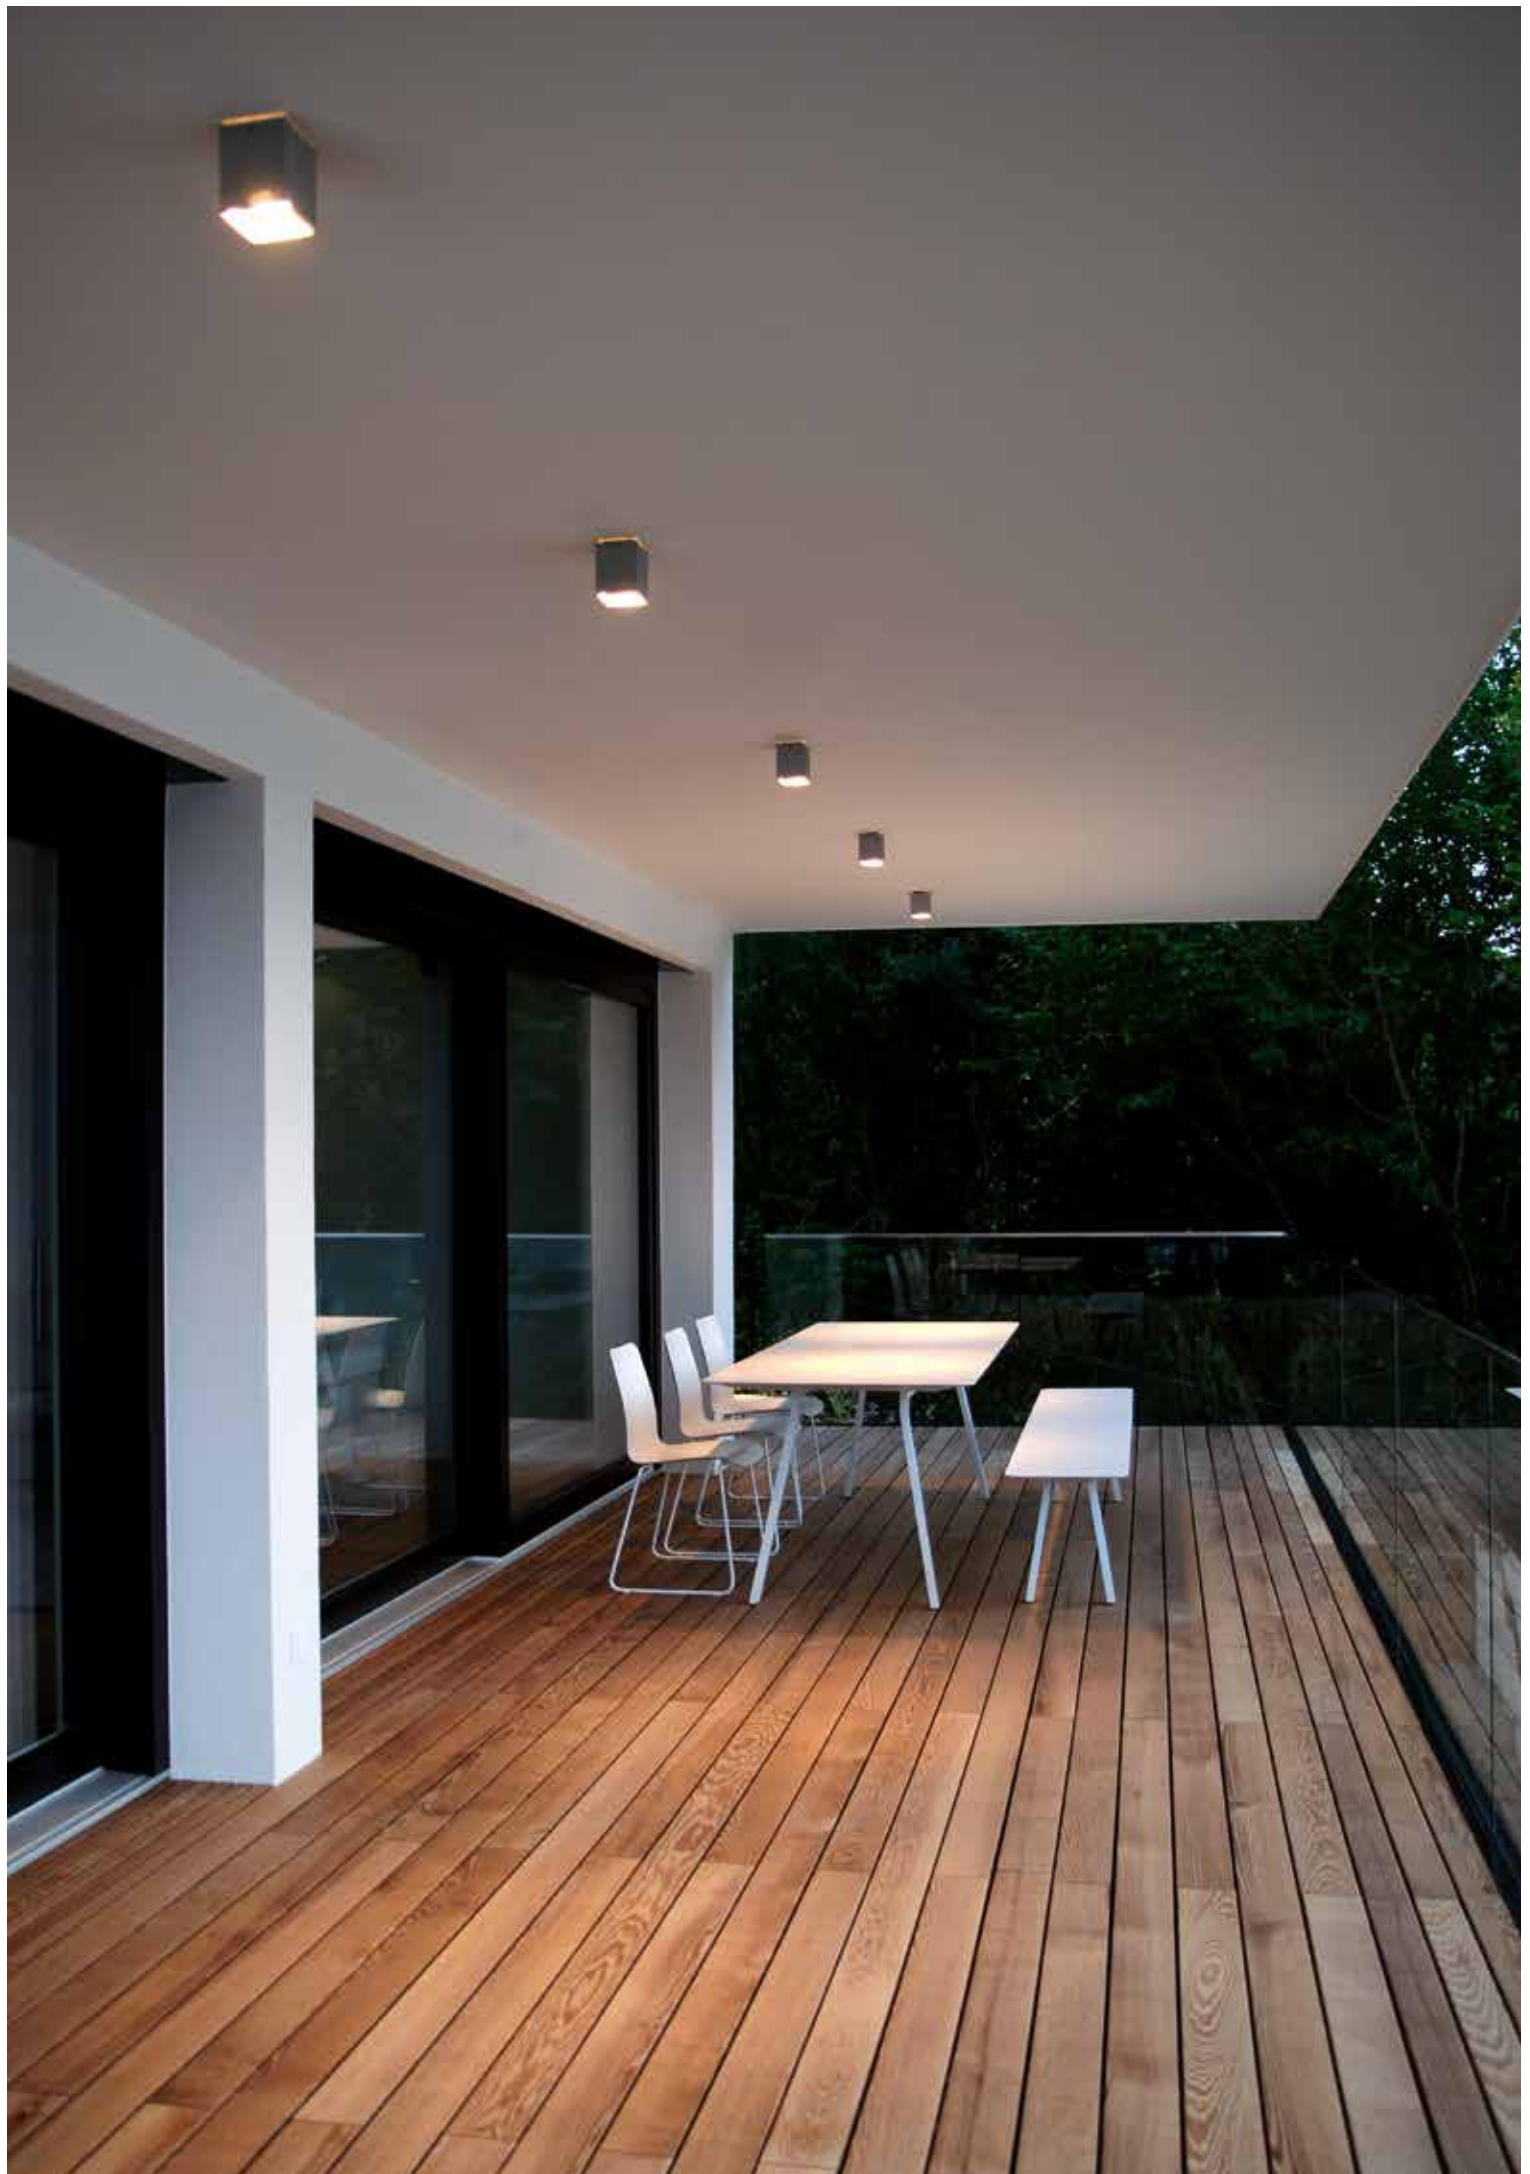

BALI S

Deckenstrahler 230 V aus Aluminium, dreh- und schwenkbar (360°/2 x 10°), mit tiefergesetztem Leuchtmittel, Reflektor wahlweise gold oder schwarz, verwendbar für 230 V Halogen und LED

Ceiling luminaire 230 V made of aluminium, adjustable (360°/ 2 x 10°), with recessed illuminant, reflector optionally gold or black, usable for 230 V halogen and LED





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D328	BALI S	black/black	1x50W/GU10	-
D329	BALI S	black/gold	1x50W/GU10	-
D324	BALI S	white/black	1x50W/GU10	-
D325	BALI S	white/gold	1x50W/GU10	-

BALI

Deckenstrahler 230 V aus Aluminium, dreh- und schwenkbar (360°/2 x 10°), mit tiefergesetztem Leuchtmittel, Reflektor wahlweise gold oder schwarz, verwendbar für 230 V Halogen und LED

Ceiling luminaire 230 V made of aluminium, adjustable (360°/ 2 x 10°), with recessed illuminant, reflector optionally gold or black, usable for 230 V halogen and LED




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D312	BALI	black/black	1x50W/GU10	-
D313	BALI	black/gold	1x50W/GU10	-
D314	BALI	white/black	1x50W/GU10	-
D315	BALI	white/gold	1x50W/GU10	-

HANGING BALI

Hängeleuchte 230 V aus Aluminium, dreh- und schwenkbar (360°/2 x 10°), mit tiefergesetztem Leuchtmittel, schwarzes Stoffkabel kürzbar, Reflektor wahlweise gold oder schwarz, verwendbar für 230 V Halogen und LED

Pendant 230 V made of aluminium, with recessed illuminant, adjustable (360°/2 x 10°), black fabric cable may be cut to any length, reflector optionally gold or black, usable for 230 V halogen and LED

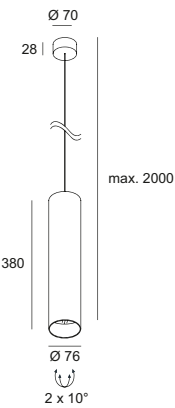

*




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D902	HANGING BALI	black/black	1x50W/GU10	-
D903	HANGING BALI	black/gold	1x50W/GU10	-
D904	HANGING BALI	white/black	1x50W/GU10	-
D905	HANGING BALI	white/gold	1x50W/GU10	-



Foto: Martin Steintaler





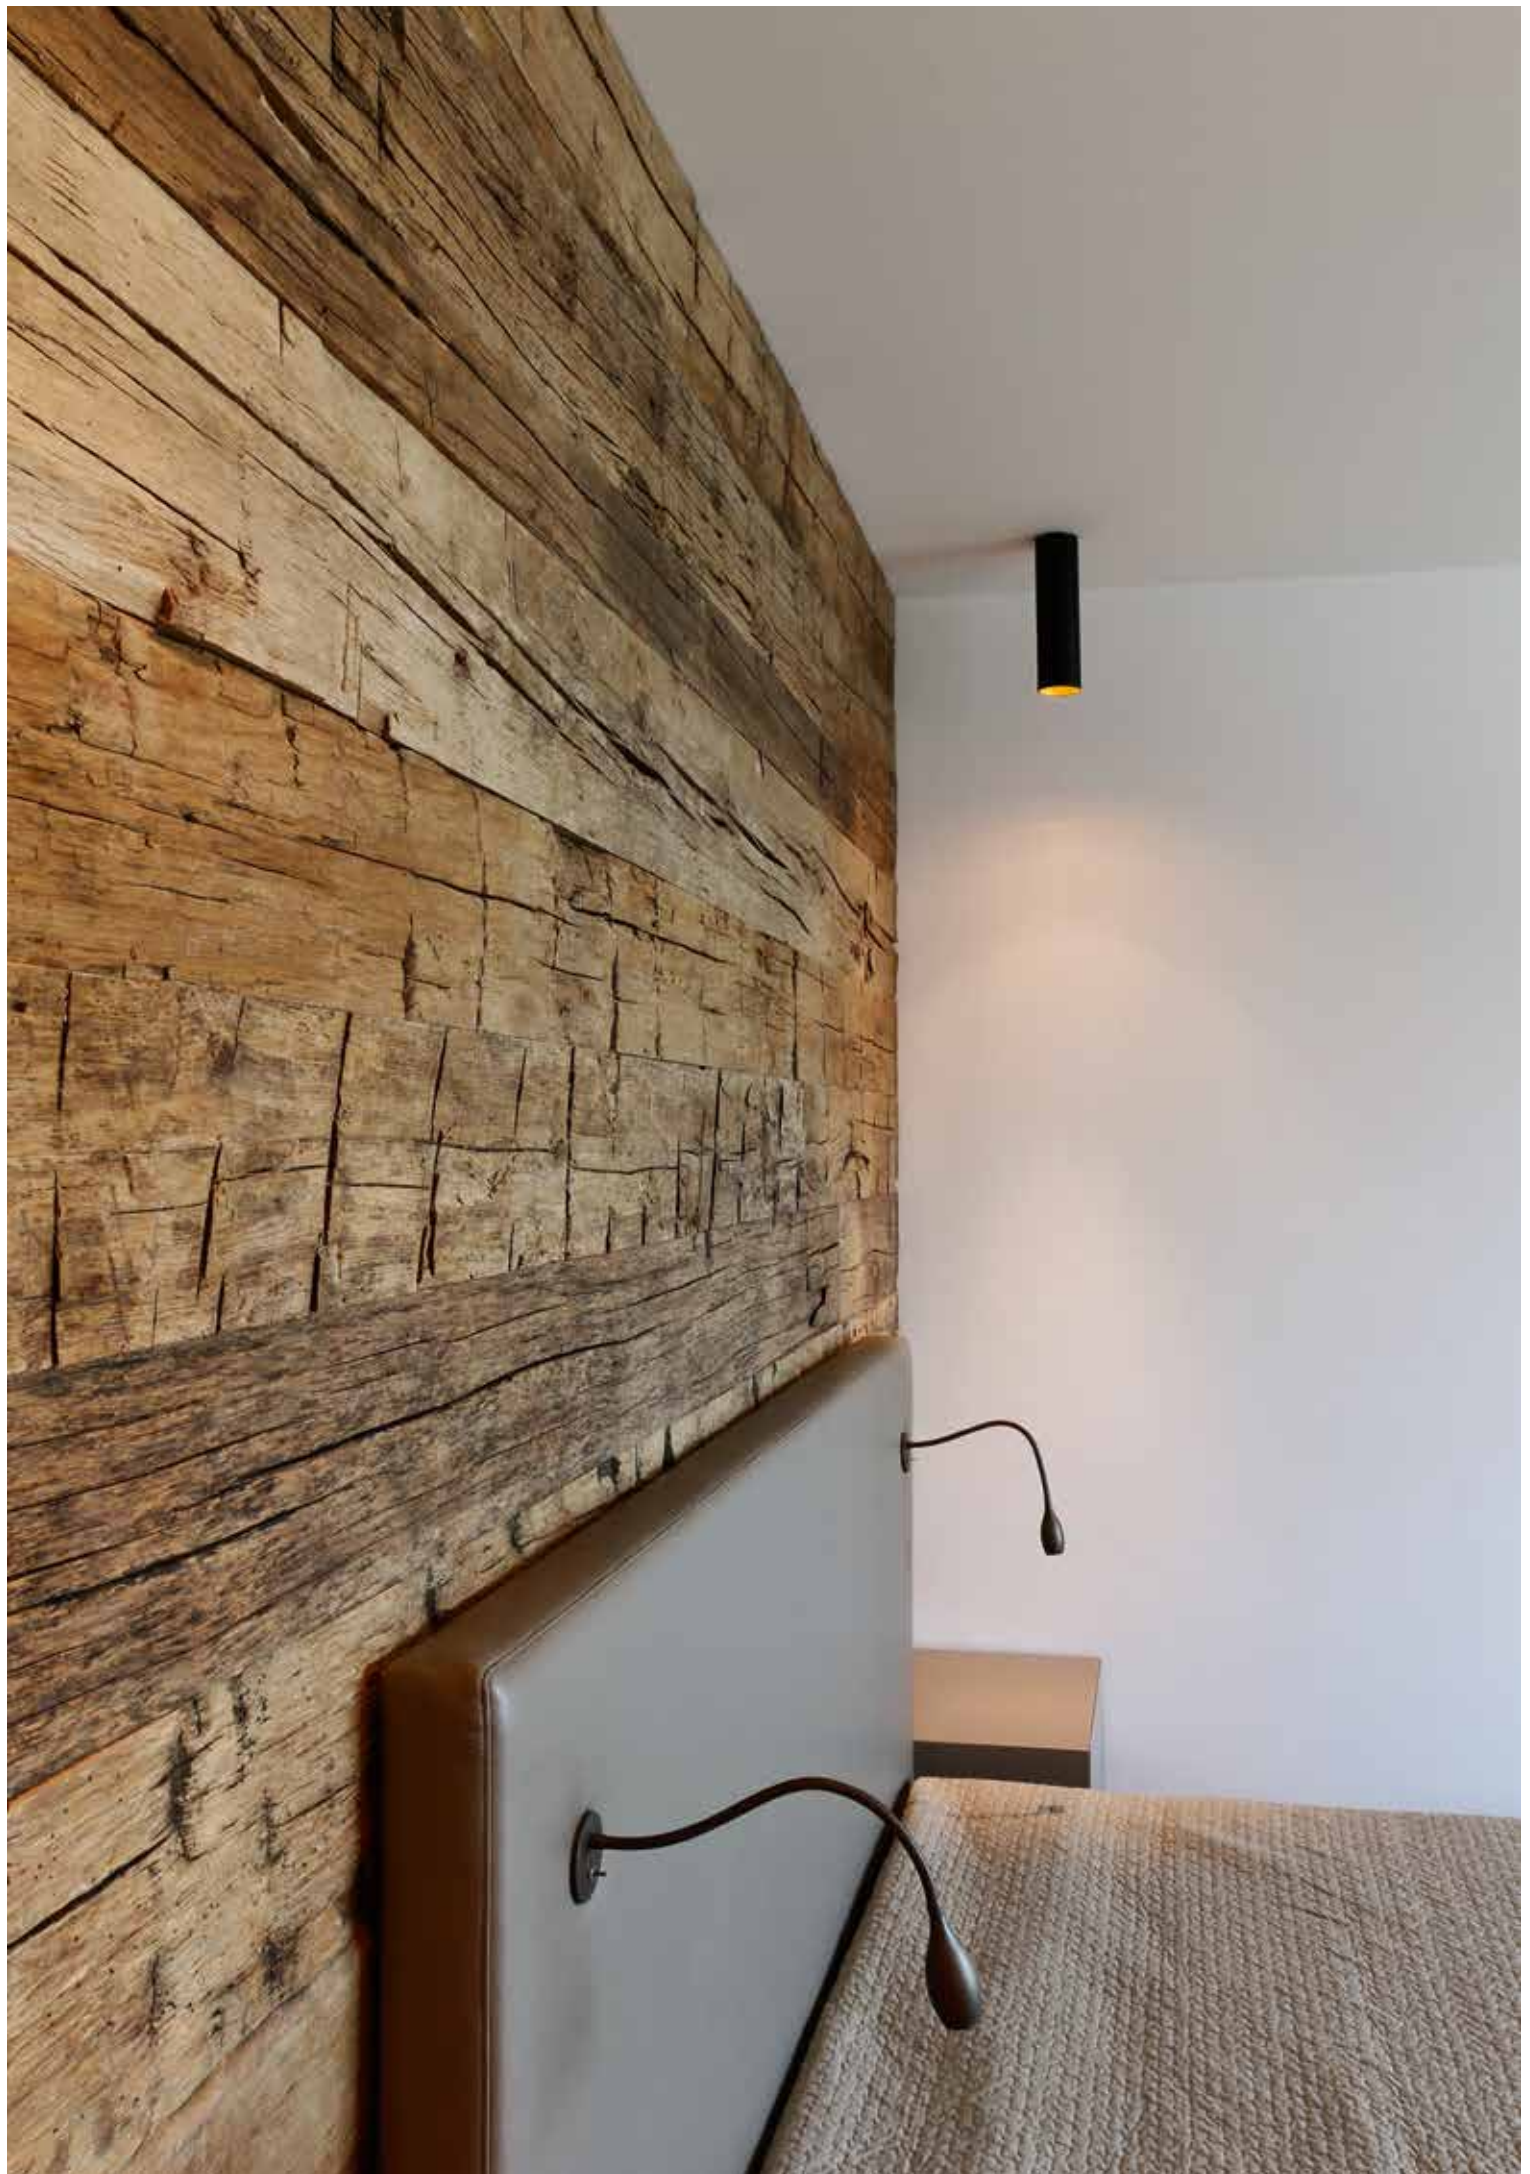

LILLI

LED-Hängeleuchte 7 W mit eingebautem Driver 230 V, aus massivem Aluminium, mit Entblendungskonus, Kabel kürzbar

LED-pendant 7 W with built-in driver 230 V, made of aluminium, with anti glare cone, cable may be cut to any length

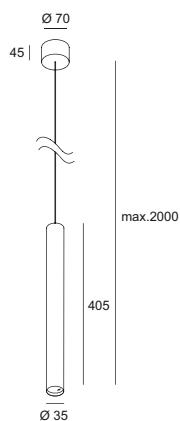

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D255	LILLI	white	1x7W LED 33°  3000K	incl. driver

* Technische Informationen siehe Seite 158 | Lumenangaben sind Nominalwerte - * Technical information see page 158 | Lumen data are nominal data






KENT

LED-Strahler 35 W mit hoch-effizientem Aluminiumreflektor, Gehäuse aus Aluminiumdruckguß, mit eingebautem Driver und 3-Phasen-Universaladapter, CRI > 90

LED-spotlight 35 W with high output aluminium reflector, made of die-cast aluminium, with built-in driver and 3-phase universal adapter, CRI > 90




3000K: 2400 Lumen
4000K: 2500 Lumen

CRI > 90 *


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D731	KENT	white	1x35W LED 15° □ 3000K	incl. driver
D732	KENT	white	1x35W LED 26° □ 3000K	incl. driver
D729	KENT	white	1x35W LED 38° □ 3000K	incl. driver
D733	KENT	black	1x35W LED 15° □ 3000K	incl. driver
D734	KENT	black	1x35W LED 26° □ 3000K	incl. driver
D730	KENT	black	1x35W LED 38° □ 3000K	incl. driver
D741	KENT	white	1x35W LED 15° □ 4000K	incl. driver
D742	KENT	white	1x35W LED 26° □ 4000K	incl. driver
D743	KENT	white	1x35W LED 38° □ 4000K	incl. driver
D744	KENT	black	1x35W LED 15° □ 4000K	incl. driver
D745	KENT	black	1x35W LED 26° □ 4000K	incl. driver
D746	KENT	black	1x35W LED 38° □ 4000K	incl. driver

ACCESSORIES



Blendschutzkappen für KENT
Antiglare shade for KENT

CODE	TYPE	max. LxWxH (60°)	COLOUR
D140	ANTI GLARE SHADE	200x200x80 mm	black




Snoot für KENT
Snoot for KENT

CODE	TYPE	LxØ	COLOUR
D141	SNOOT	-	black



Wabenraster für KENT
Honey comb louvre for KENT

CODE	TYPE	LxØ	COLOUR
D142	HONEY COMB LOUVRE	-	black



Filter für KENT
Filter for KENT

CODE	TYPE	LxØ	COLOUR
D165	LINEAR DIFFUSION	-	-
D166	PRISMATIC DIFFUSION	-	-



filtereffect linear diffusion: 15°, 26°, 38°



filtereffect prismatic diffusion: 15°, 26°, 38°



Foto: Martin Steinhäler





Projekt: Badstudio Leoben / Foto: Odörfer

KENT S

LED-Strahler 15 W dimmbar mit hocheffizientem Aluminiumreflektor, Gehäuse aus Aluminiumdruckguß, mit eingebautem Driver, dimmbar mit Phasenanschnitt-/Phasenabschnittdimmer, 3-Phasen-Universaladapter, CRI > 90

LED-spotlight 15 W dimmable with high output aluminium reflector, made of die-cast aluminium, with built-in driver, dimmable with phase control/phase cutting, and 3-phase universal adapter, CRI > 90






dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D960	KENT S	white	1x15W LED 10° 3000K	incl. driver phase dim
D961	KENT S	white	1x15W LED 18° 3000K	incl. driver phase dim
D962	KENT S	white	1x15W LED 30° 3000K	incl. driver phase dim
D963	KENT S	white	1x15W LED 38° 3000K	incl. driver phase dim
D964	KENT S	black	1x15W LED 10° 3000K	incl. driver phase dim
D965	KENT S	black	1x15W LED 18° 3000K	incl. driver phase dim
D966	KENT S	black	1x15W LED 30° 3000K	incl. driver phase dim
D967	KENT S	black	1x15W LED 38° 3000K	incl. driver phase dim


LED in 2700 K und 4000 K auf Anfrage / 2700 K and 4000 K LED on request

ACCESSORIES



Snoot für KENT S
Snoot for KENT S

CODE	TYPE	LxØ	COLOUR
D144	SNOOT	-	black



Wabenraster für KENT S
Honey comb louvre for KENT S


CODE	TYPE	LxØ	COLOUR
D145	HONEY COMB LOUVRE	-	black



KENT BAKERY KENT MEAT

LED-Strahler 32 W mit spezieller Lichtfarbe für Bäckerei- und Fleischwaren, hocheffizientem Aluminiumreflektor, Gehäuse aus Aluminiumdruckguß, mit eingebautem Driver und 3-Phasen-Universaladapter

LED-spotlight 32 W with special luminous colours for bakery and meat products, high output aluminium reflector, made of die-cast aluminium, with built-in driver and 3-phase universal adapter



		2500K: 2200 Lumen 1750K: 2000 Lumen	*
--	--	--	---


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D735	KENT BAKERY	white	1x32W LED 15° 2500K	incl. driver
D736	KENT BAKERY	white	1x32W LED 26° 2500K	incl. driver
D737	KENT BAKERY	white	1x32W LED 38° 2500K	incl. driver
D738	KENT BAKERY	black	1x32W LED 15° 2500K	incl. driver
D739	KENT BAKERY	black	1x32W LED 26° 2500K	incl. driver
D740	KENT BAKERY	black	1x32W LED 38° 2500K	incl. driver
D765	KENT MEAT	white	1x32W LED 15° 1750K	incl. driver
D766	KENT MEAT	white	1x32W LED 26° 1750K	incl. driver
D767	KENT MEAT	white	1x32W LED 38° 1750K	incl. driver
D768	KENT MEAT	black	1x32W LED 15° 1750K	incl. driver
D769	KENT MEAT	black	1x32W LED 26° 1750K	incl. driver
D770	KENT MEAT	black	1x32W LED 38° 1750K	incl. driver

Zubehör siehe Seite 60 / accessories see page 60

SINO BAKERY SINO MEAT

LED-Einbaustrahler 32 W mit spezieller Lichtfarbe für Bäckerei- und Fleischwaren, hocheffizientem Aluminiumreflektor, aus massivem Aluminium, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 32 W with special luminous colours for bakery and meat products, high output aluminium reflector, made of aluminium, please order driver separately (see page 156 ff.)



		2500K: 2200 Lumen 1750K: 2000 Lumen	*
--	--	--	---

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D709	SINO BAKERY	white	1x32W LED 38° 2500K 1050 mA	excl. driver	180 mm
D710	SINO MEAT	white	1x32W LED 38° 1750K 1050 mA	excl. driver	180 mm

H = Einbautiefe / recessed depth

LED-Strahler mit spezieller Lichtfarbe für Bäckerei- und Fleischwaren
LED-spotlight with special luminous colours for bakery and meat products



KENT BAKERY / SINO BAKERY

KENT MEAT / SINO MEAT



Architekt: Ahrens Planung & Beratung / Foto: David Haghuber




Architekt: KLUNE Innenarchitektur / Foto: Cynthia Fischer

LUCY

LED-Strahler 10 W mit hoch-effizientem Aluminiumreflektor, Gehäuse aus Aluminiumdruck-guß, 3-Phasen-Universaladap-ter mit eingebautem Driver

LED-spotlight 10 W with high output aluminium reflector, made of die-cast aluminium, 3-phase universal adapter with built-in driver





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D720	LUCY	white	1x10W LED 18° 3000K	incl. driver
D722	LUCY	white	1x10W LED 38° 3000K	incl. driver
D721	LUCY	white	1x10W LED 60° 3000K	incl. driver
D717	LUCY	black	1x10W LED 18° 3000K	incl. driver
D719	LUCY	black	1x10W LED 38° 3000K	incl. driver
D718	LUCY	black	1x10W LED 60° 3000K	incl. driver





Z000M

LED-Einbaustrahler 2 W mit hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, dreh- und schwenkbar (360°/2x25°), Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed fixture 2 W with high-quality glass lens, focusable from 15° to 60°, adjustable (360°/2x25°), please order driver separately (see page 156 ff.)



*

A++-A

170 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
131-09-00-01	Z000M	chrome	1x2W LED 15°-60° 3000K 500mA	excl. driver	27 mm
131-09-00-05	Z000M	black	1x2W LED 15°-60° 3000K 500mA	excl. driver	27 mm
131-09-00-33	Z000M	platinum	1x2W LED 15°-60° 3000K 500mA	excl. driver	27 mm

LED in 4000K auf Anfrage / 4000K LED on request

H = Einbautiefe / recessed depth

Z000M DS

LED-Strahler 2 W mit Aufbauplatte und hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, dreh- und schwenkbar (270°/90°), Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-fixture 2 W surface mounted, with high-quality glass lens, focusable from 15° to 60°, adjustable (270°/90°), please order driver separately (see page 156 ff.)



*

A++-A

170 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
132-09-00-01	Z000M DS	chrome	1x2W LED 15°-60° 3000K 500mA	excl. driver
132-09-00-05	Z000M DS	black	1x2W LED 15°-60° 3000K 500mA	excl. driver
132-09-00-33	Z000M DS	platinum	1x2W LED 15°-60° 3000K 500mA	excl. driver

LED in 4000K auf Anfrage / 4000K LED on request

Z000M TELE

LED-Strahler 2 W mit Aufbauplatte und hochwertiger Glasoptik, Ausstrahlwinkel fokussierbar von 15° bis 60°, dreh- und schwenkbar (270°/90°) und zusätzlich höhenverstellbar, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-fixture 2 W surface mounted, with high-quality glass lens, focusable from 15° to 60°, adjustable (270°/90°), also adjustable height, please order driver separately (see page 156 ff.)



*

A++-A

170 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
133-09-00-01	Z000M TELE	chrome	1x2W LED 15°-60° 3000K 500mA	excl. driver
133-09-00-05	Z000M TELE	black	1x2W LED 15°-60° 3000K 500mA	excl. driver
133-09-00-33	Z000M TELE	platinum	1x2W LED 15°-60° 3000K 500mA	excl. driver

LED in 4000K auf Anfrage / 4000K LED on request



Z000M - Fokussierbar von 15° bis 60° / focusable from 15° to 60°







ALULINE 3

LED-Anbauprofilleuchte
3x2 W, aus massivem
Aluminium, mit tiefer
gesetzten LEDs, Driver
bitte separat bestellen
(siehe Seite 156 ff.)

LED surface-mounted profile
luminaire 3x2 W, made of
aluminium, with recessed
LEDs, please order driver
separately (see page 156 ff.)



dim

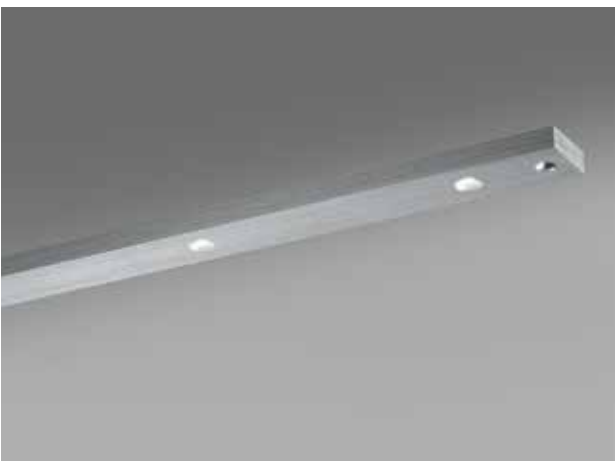


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D233	ALULINE 3	white	3x2W LED 3000K 500mA	excl. driver
D234	ALULINE 3	alu	3x2W LED 3000K 500mA	excl. driver

ALULINE 5

LED-Anbauprofilleuchte
5x2 W, aus massivem
Aluminium, mit tiefer
gesetzten LEDs, Driver
bitte separat bestellen
(siehe Seite 156 ff.)

LED surface-mounted profile
luminaire 5x2 W, made of
aluminium, with recessed
LEDs, please order driver
separately (see page 156 ff.)



dim





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D235	ALULINE 5	white	5x2W LED 3000K 500mA	excl. driver
D236	ALULINE 5	alu	5x2W LED 3000K 500mA	excl. driver



LEDA

LED-Einbaustrahler 2,4 W aus massivem Aluminium, mit Linsenoptik 30°, schwenkbar 2x30°, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed fixture 2,4 W made of aluminium, with 30° lens, adjustable 2x30°, please order driver separately (see page 156 ff.)





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D289	LEDA	alu	1x2,4W LED 30° 3000K 700mA	excl. driver	35 mm
D290	LEDA	white	1x2,4W LED 30° 3000K 700mA	excl. driver	35 mm

H = Einbautiefe / recessed depth

DIANA

LED-Einbaustrahler 1 W aus Aluminium, mit Opaldiffusor, Driver bitte separat bestellen (siehe Seite 156 ff.), RGB-Ausführung auf Anfrage

LED-recessed fixture 1 W made of aluminium, with opal diffuser, please order driver separately (see page 156 ff.), RGB version on request



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
591-09-27-01	DIANA	chrome	1x1W LED 3000K 350mA	excl. driver	20 mm
591-09-27-33	DIANA	platinum	1x1W LED 3000K 350mA	excl. driver	20 mm
591-05-27-01	DIANA	chrome	1x1W LED 4000K 350mA	excl. driver	20 mm
591-05-27-33	DIANA	platinum	1x1W LED 4000K 350mA	excl. driver	20 mm
591-04-27-01	DIANA	chrome	1x1W LED blue 350mA	excl. driver	20 mm
591-04-27-33	DIANA	platinum	1x1W LED blue 350mA	excl. driver	20 mm
591-07-27-01	DIANA	chrome	1x1W LED red 350mA	excl. driver	20 mm
591-07-27-33	DIANA	platinum	1x1W LED red 350mA	excl. driver	20 mm
591-15-27-01	DIANA	chrome	1x1W LED green 350mA	excl. driver	20 mm
591-15-27-33	DIANA	platinum	1x1W LED green 350mA	excl. driver	20 mm



H = Einbautiefe / recessed depth

ACCESSORIES



Unterputzdose für DIANA (Ø 28 mm)
Mounting box for DIANA (Ø 28 mm)

CODE	TYPE	COLOUR
9000-0128	MOUNTING BOX 28 (DIANA)	-



Montagering (2-teilig) für Hohlwanddosen Ø 68 mm für DIANA
Mounting ring (2-parts) for junction boxes Ø 68 mm for DIANA

CODE	TYPE	COLOUR
9000-0328	MOUNTING RING 28 (DIANA)	white





PLUTON

LED-Einbaustrahler 2 W aus Aluminium, mit Linsenoptik 30°, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed fixture 2 W made of aluminium, with 30° lens, please order driver separately (see page 156 ff.)



3000K: 170 Lumen
4000K: 190 Lumen *



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
592-09-15-01	PLUTON	chrome	1x2W LED 30° 3000K 500mA	excl. driver	26 mm
592-09-15-33	PLUTON	platinum	1x2W LED 30° 3000K 500mA	excl. driver	26 mm
592-05-15-01	PLUTON	chrome	1x2W LED 30° 4000K 500mA	excl. driver	26 mm
592-05-15-33	PLUTON	platinum	1x2W LED 30° 4000K 500mA	excl. driver	26 mm

H = Einbautiefe / recessed depth

PLUTON OPAL

LED-Einbaustrahler 2 W aus Aluminium, mit Opaldiffusor, Driver bitte separat bestellen (siehe Seite 156 ff.), RGB-Ausführung auf Anfrage

LED-recessed fixture 2 W made of aluminium, with opal diffusor, please order driver separately (see page 156 ff.), RGB version on request



3000K: 170 Lumen
4000K: 190 Lumen *



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
592-09-60-01	PLUTON OPAL	chrome	1x2W LED 3000K 500mA	excl. driver	26 mm
592-09-60-33	PLUTON OPAL	platinum	1x2W LED 3000K 500mA	excl. driver	26 mm
592-05-60-01	PLUTON OPAL	chrome	1x2W LED 4000K 500mA	excl. driver	26 mm
592-05-60-33	PLUTON OPAL	platinum	1x2W LED 4000K 500mA	excl. driver	26 mm
592-04-60-01	PLUTON OPAL	chrome	1x2W LED blue 500mA	excl. driver	26 mm
592-04-60-33	PLUTON OPAL	platinum	1x2W LED blue 500mA	excl. driver	26 mm
592-07-60-01	PLUTON OPAL	chrome	1x2W LED red 500mA	excl. driver	26 mm
592-07-60-33	PLUTON OPAL	platinum	1x2W LED red 500mA	excl. driver	26 mm
592-15-60-01	PLUTON OPAL	chrome	1x2W LED green 500mA	excl. driver	26 mm
592-15-60-33	PLUTON OPAL	platinum	1x2W LED green 500mA	excl. driver	26 mm



H = Einbautiefe / recessed depth

ACCESSORIES




Unterputzdose für PLUTON und PLUTON OPAL (Ø 30 mm)
Mounting box for PLUTON and PLUTON OPAL (Ø 30 mm)

CODE	TYPE	COLOUR
9000-0130	MOUNTING BOX 30 (PLUTON, PLUTON OPAL)	-



Betoneinbauhülsen für PLUTON und PLUTON OPAL
Concrete mounting sleeve for PLUTON and PLUTON OPAL

CODE	TYPE	COLOUR
9000-0230	MOUNTING SLEEVE 30 (PLUTON, PLUTON OPAL)	-







LUCKY STAR

LED-Wandeinbauleuchte 230 V mit 2,5 W AC-LED, aus massivem Aluminium

LED-wall recessed luminaire 230 V with 2,5 W AC-LED, made of aluminium

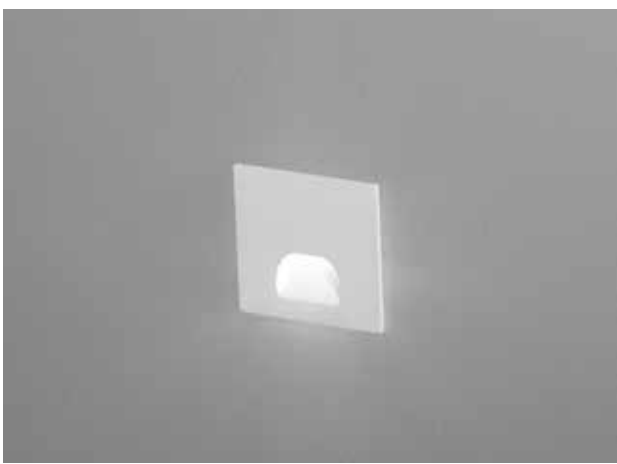

*

180 Lumen

230 V



LED

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D789	LUCKY STAR	white	1x2,5W LED 3000K	230 V	50 mm

SPLIT

LED-Wandeinbauleuchte 3 W aus massivem Aluminium, Gehäuse weiß, Innenteil alu oder mattgold, inklusive Driver und Einbaugehäuse

LED-wall recessed luminaire 3 W made of aluminium, body white, inner part alu or dull gold, including driver and mounting box

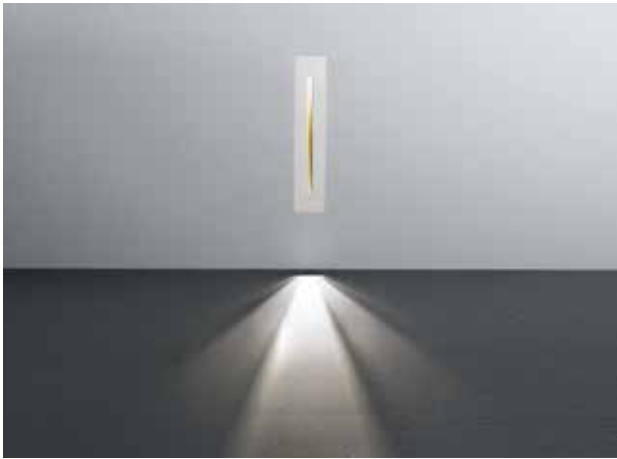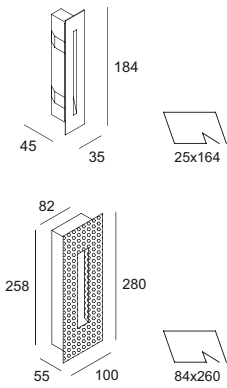

*

144 Lumen

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D297	SPLIT	white/white	1x3W LED 3000K	incl. driver
D298	SPLIT	white/gold	1x3W LED 3000K	incl. driver



H = Einbautiefe / recessed depth



SAXO

LED-Wandeinbauleuchte 2 W aus massivem Aluminium, inklusive Driver und Einbaugehäuse, für den Innen- und Außenbereich verwendbar, IP54

LED-wall recessed luminaire 2 W made of aluminium, including driver and mounting box, to be used in indoor and outdoor areas, IP54




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D202	SAXO	white	1x2W LED 3000K	incl. driver	35 mm
D702	SAXO	grey	1x2W LED 3000K	incl. driver	35 mm

H = Einbautiefe / recessed depth

SAXO ON

LED-Wandleuchte 2 W aus massivem Aluminium, inklusive Driver, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 2 W made of aluminium, including driver, to be used in indoor and outdoor areas, IP54






CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D203	SAXO ON	white	1x2W LED 3000K	incl. driver	

H = Einbautiefe / recessed depth

PIXEL

LED-Wandeinbauleuchte 1 W aus massivem Aluminium, Driver bitte separat bestellen (siehe Seite 156 ff.), für den Innen- und Außenbereich verwendbar, IP44

LED-wall recessed luminaire 1 W made of aluminium, please order driver separately (see page 156 ff.), to be used in indoor and outdoor areas, IP44



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D279	PIXEL	alu	1x1W LED 3000K 350mA	excl. driver	45 mm
D229	PIXEL	white	1x1W LED 3000K 350mA	excl. driver	45 mm


H = Einbautiefe / recessed depth

ACCESSORIES



Betoneinbauhülsen für PIXEL
Concrete mounting sleeve for PIXEL

CODE	TYPE	COLOUR
9000-0241	MOUNTING SLEEVE 41 (PIXEL)	-







SMILE

LED-Wandeinbauleuchte 2 W aus Aluminium, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-wall recessed luminaire 2 W made of aluminium, please order driver separately (see page 156 ff.)





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
492-09-00-01	SMILE	chrome	1x2W LED 3000K 500mA	excl. driver	25 mm
492-09-00-03	SMILE	white	1x2W LED 3000K 500mA	excl. driver	25 mm
492-09-00-33	SMILE	platinum	1x2W LED 3000K 500mA	excl. driver	25 mm

H = Einbautiefe / recessed depth

SMILE Q

LED-Wandeinbauleuchte 2 W aus Aluminium, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-wall recessed luminaire 2 W made of aluminium, please order driver separately (see page 156 ff.)



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
892-09-00-03	SMILE Q	white	1x2W LED 3000K 500mA	excl. driver	25 mm
892-09-00-33	SMILE Q	platinum	1x2W LED 3000K 500mA	excl. driver	25 mm



H = Einbautiefe / recessed depth

ACCESSORIES




Unterputzdose für SMILE und SMILE Q (Ø 36 mm)
Mounting box for SMILE and SMILE Q (Ø 36 mm)

CODE	TYPE	COLOUR
9000-0136	MOUNTING BOX 36 (SMILE, SMILE Q)	-




Montagering (2-teilig) für Hohlwanddosen Ø 68 mm für SMILE und SMILE Q
Mounting ring (2-parts) for junction boxes Ø 68 mm for SMILE and SMILE Q

CODE	TYPE	COLOUR
9000-0336	MOUNTING RING 36 (SMILE, SMILE Q)	white



Betoneinbauhülsen für SMILE und SMILE Q
Concrete mounting sleeve for SMILE and SMILE Q

CODE	TYPE	COLOUR
9000-0236	MOUNTING SLEEVE 36 (SMILE, SMILE Q)	-







SQUARE

Einbaustrahler 12 V oder 230 V,
2-fach schwenkbar 2x30°/
2x10°, mit Entblendungsring,
verwendbar für 12 V oder
230 V Halogen und LED

Recessed downlight 12 V
and 230 V, adjustable 2x30°/
2x10°, with anti glare ring,
usable for 12 V or 230 V
halogen and LED



dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D480	SQUARE	white	1x50W/GU5,3	excl. transformer	90 mm
D481	SQUARE	grey	1x50W/GU5,3	excl. transformer	90 mm
D382	SQUARE	white	1x50W/GU10	-	100 mm
D381	SQUARE	grey	1x50W/GU10	-	100 mm

H = Einbautiefe / recessed depth

SQUARE DUO

2-fach Einbaustrahler 12 V
oder 230 V, 2-fach schwenkbar
2x30°/2x10°, mit Entblen-
dungsring, verwendbar für 12 V
oder 230 V Halogen und LED

Double recessed downlight
12 V und 230 V, adjustable
2x30°/2x10°, with anti glare
ring, usable for 12 V or 230 V
halogen and LED



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D482	SQUARE DUO	white	2x50W/GU5,3	excl. transformer	90 mm
D483	SQUARE DUO	grey	2x50W/GU5,3	excl. transformer	90 mm
D384	SQUARE DUO	white	2x50W/GU10	-	100 mm
D383	SQUARE DUO	grey	2x50W/GU10	-	100 mm

H = Einbautiefe / recessed depth

KAMEN

LED-Einbaustrahler 4 W,
mit Glassabdeckung, Driver
bitte separat bestellen (siehe
Seite 156 ff.)

LED-recessed downlight 4 W,
with glass cover, please order
driver separately (see page
156 ff.)




dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D790	KAMEN	white	4W LED □ 3000K 350mA	excl. driver	90 mm

H = Einbautiefe / recessed depth



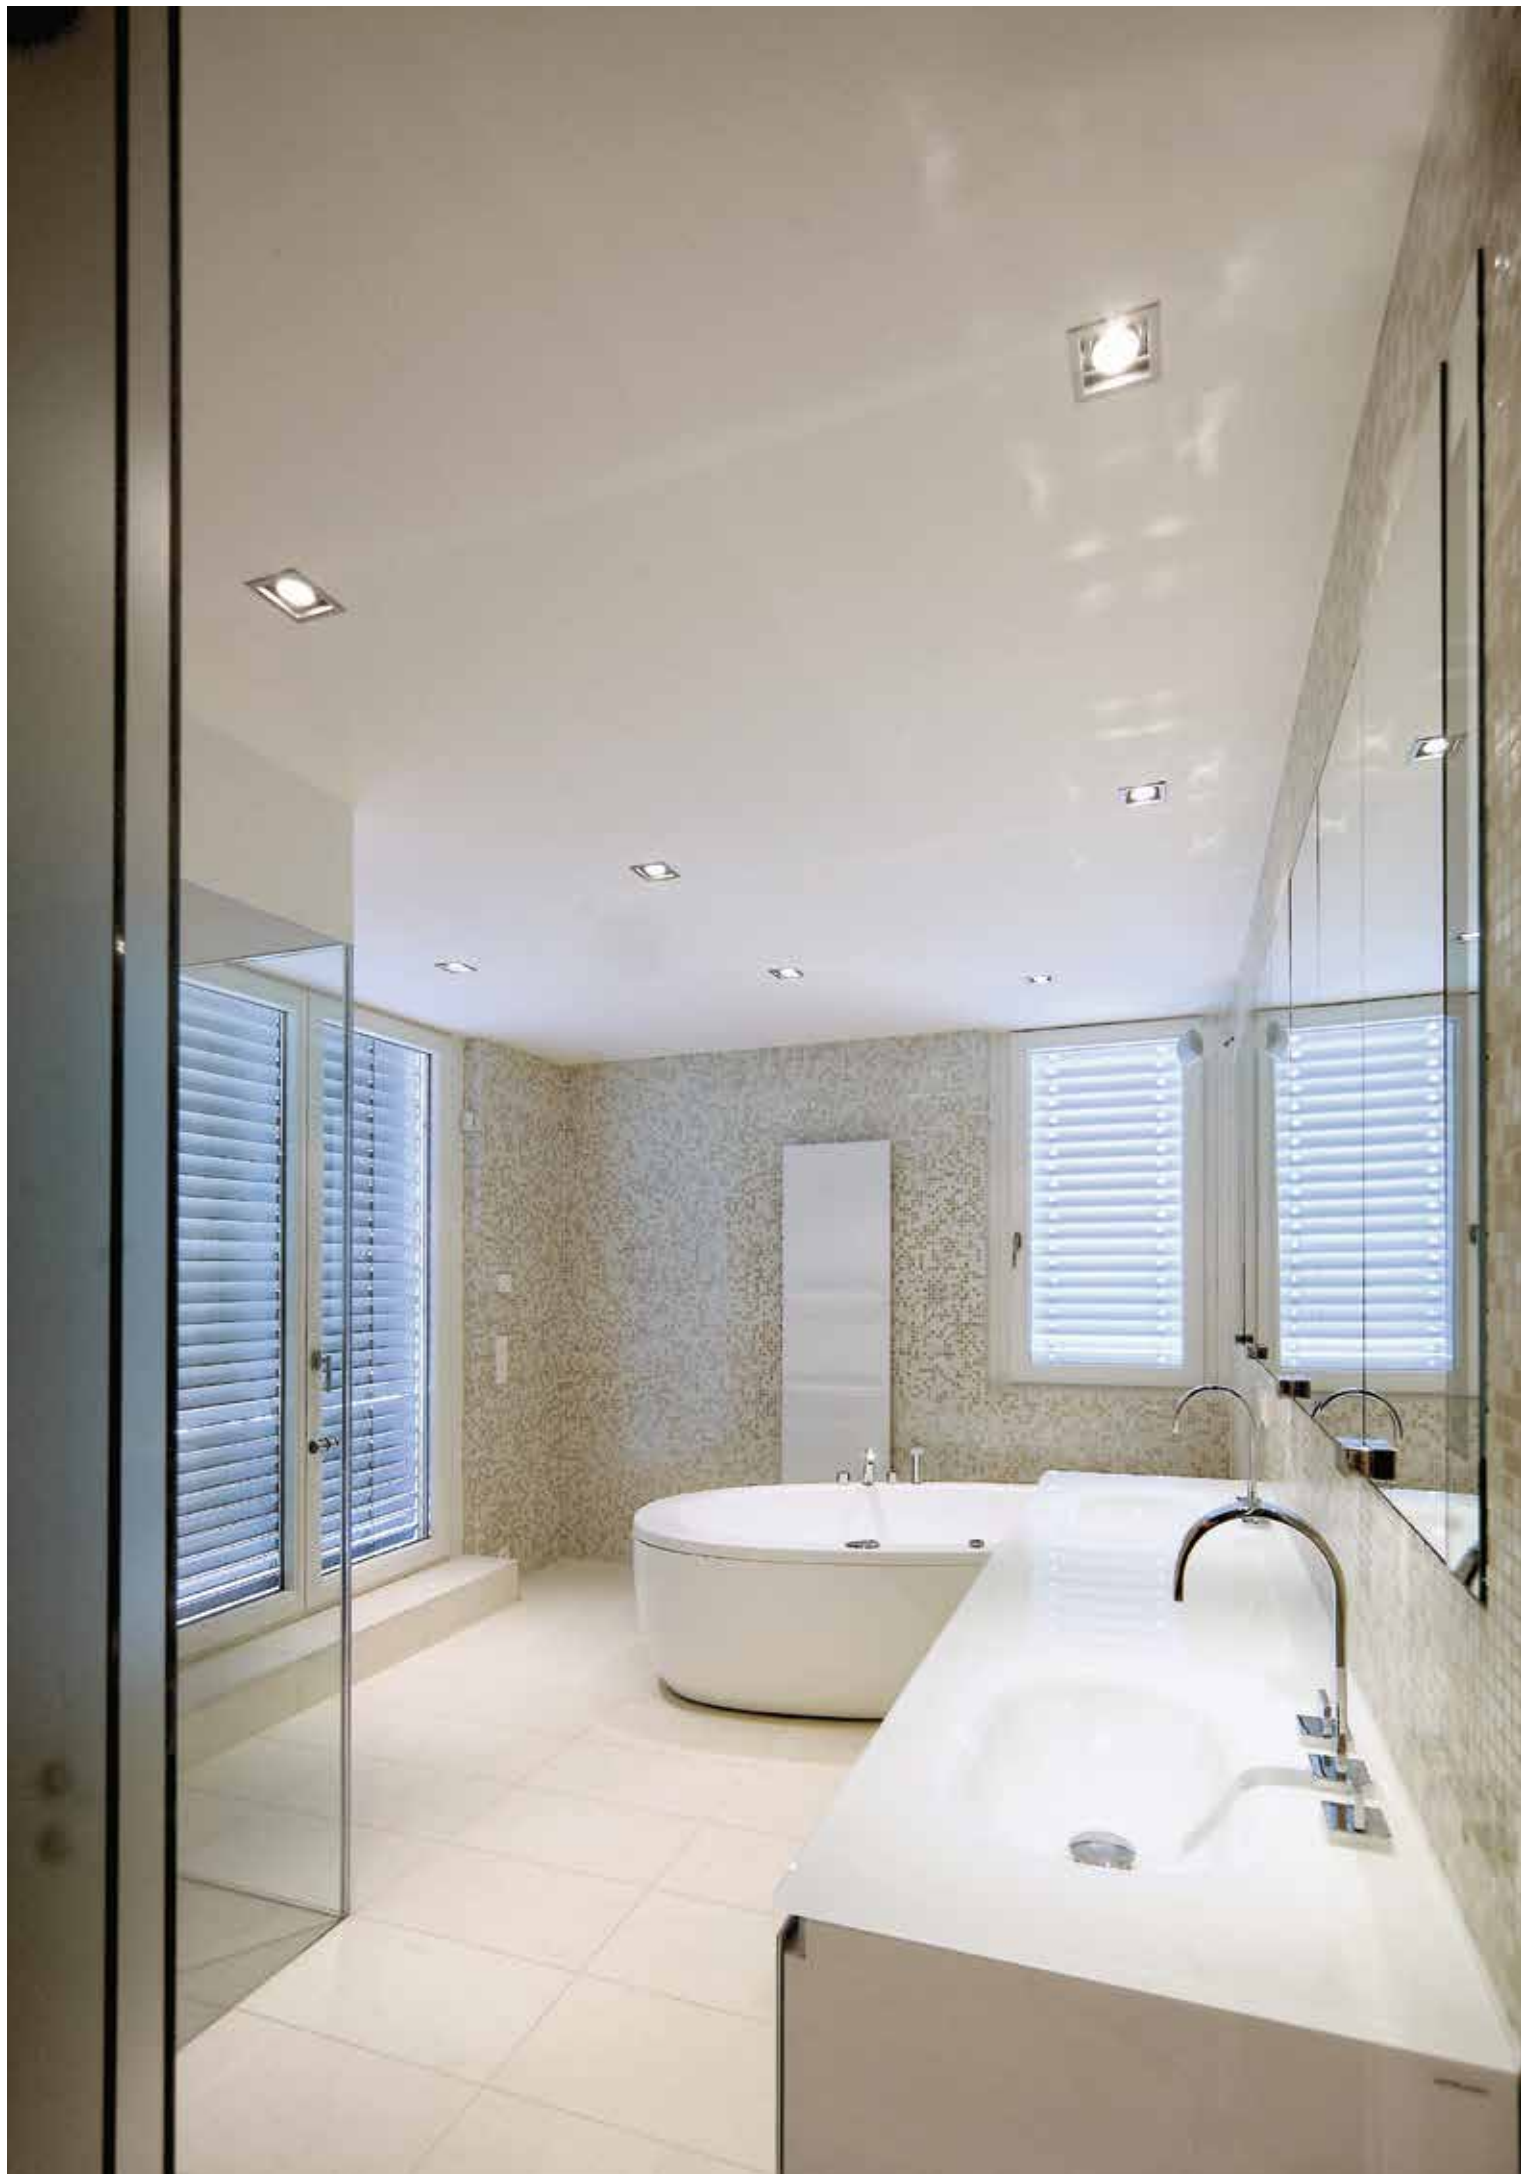




NO FRAME 80

Einbaustrahler 12 V oder 230 V für rand- und werkzeuglosen Einbau, Leuchtmittel kardänisch gelagert, verwendbar für 12 V oder 230 V Halogen und LED, Einbau-KIT bitte separat bestellen

Recessed downlight 12 V or 230 V, for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V or 230 V halogen and LED, please order recessed frame (KIT) separately



dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D411	NO FRAME 80	white	1x50W/GU5,3	excl. transformer	120 mm
D412	NO FRAME 80	black	1x50W/GU5,3	excl. transformer	120 mm
D911	NO FRAME 80	white	1x50W/GU10	-	140 mm
D912	NO FRAME 80	black	1x50W/GU10	-	140 mm

H = Einbautiefe / recessed depth

NO FRAME 80 DUO

2-fach Einbaustrahler 12 V oder 230 V für rand- und werkzeuglosen Einbau, Leuchtmittel kardänisch gelagert, verwendbar für 12 V oder 230 V Halogen und LED, Einbau-KIT bitte separat bestellen

Double recessed downlight 12 V or 230 V, for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V or 230 V halogen and LED, please order recessed frame (KIT) separately




dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D415	NO FRAME 80 DUO	white	2x50W/GU5,3	excl. transformer	120 mm
D416	NO FRAME 80 DUO	black	2x50W/GU5,3	excl. transformer	120 mm
D915	NO FRAME 80 DUO	white	2x50W/GU10	-	140 mm
D916	NO FRAME 80 DUO	black	2x50W/GU10	-	140 mm


H = Einbautiefe / recessed depth

ACCESSORIES



Einbaurahmen für Serie NO FRAME 80 für Gipskartonplatten der Stärke 12,5 mm und 20 mm. Ausgleichsplatten für andere Gipskartonstärken auf Anfrage.
Recessed frame for NO FRAME 80 series for 12,5 mm and 20 mm plasterboards. Compensating plates for other dimensions of plasterboards on request.

CODE	TYPE	COLOUR
D111	KIT 80	white
D112	KIT 80	black
D115	KIT 80 DUO	white
D116	KIT 80 DUO	black






NO FRAME 100

LED-Einbaustrahler 20,9 W mit hochwertigem Aluminiumreflektor für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisch gelagert, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

LED-recessed downlight 20,9 W with high value aluminium reflector for trimless assembly, mountable without tools, illuminant gimbal mounted, please order driver (see page 156 ff.) and recessed frame (KIT) separately



* 2040 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D291	NO FRAME 100	white	1x20,9W LED 38° 3000K 700 mA excl. driver		145 mm
D292	NO FRAME 100	black	1x20,9W LED 38° 3000K 700 mA excl. driver		145 mm

H = Einbautiefe / recessed depth


NO FRAME 100 DUO

LED-Einbaustrahler 2x20,9 W mit hochwertigem Aluminiumreflektor für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisch gelagert, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

LED-recessed downlight 2x20,9 W with high value aluminium reflector for trimless assembly, mountable without tools, illuminant gimbal mounted, please order driver (see page 156 ff.) and recessed frame (KIT) separately




* 2x2040 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D293	NO FRAME 100 DUO	white	2x20,9W LED 38° 3000K 700 mA excl. driver		145 mm
D294	NO FRAME 100 DUO	black	2x20,9W LED 38° 3000K 700 mA excl. driver		145 mm



H = Einbautiefe / recessed depth

ACCESSORIES



Einbaurahmen für Serie NO FRAME 100 für Gipskartonplatten der Stärke 12,5 mm und 20 mm. Ausgleichsplatten für andere Gipskartonstärken auf Anfrage.
Recessed frame for NO FRAME 100 series for 12,5 mm and 20 mm plasterboards.
Compensating plates for other dimensions of plasterboards on request.

CODE	TYPE	COLOUR
D191	KIT 100	white
D192	KIT 100	black
D193	KIT 100 DUO	white
D194	KIT 100 DUO	black







NO FRAME 150

Einbaustrahler für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisches gelagert, verwendbar für 12 V Halogen und LED oder mit LED-Modul 18 W, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

Recessed downlight for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V halogen and LED or with LED module 18 W, please order driver (see page 156 ff.) and recessed frame (KIT) separately

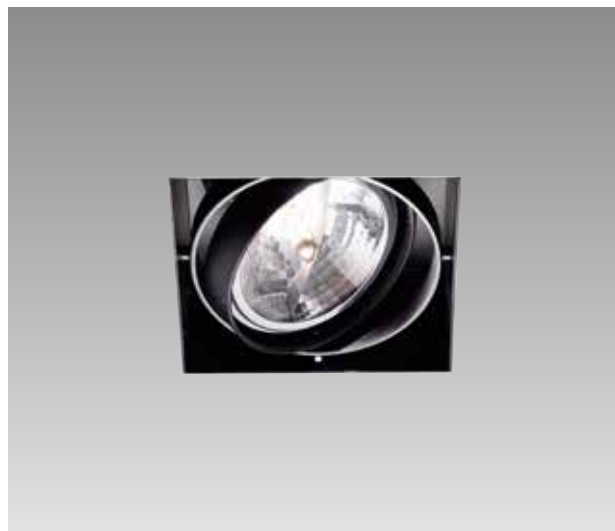

LED module:
1900 Lumen *

dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D561	NO FRAME 150	white	1x18W LED 35° 3000K 500mA	excl. driver	130 mm
D562	NO FRAME 150	black	1x18W LED 35° 3000K 500mA	excl. driver	130 mm
D451	NO FRAME 150	white	1x100W/G53	excl. transformer	130 mm
D452	NO FRAME 150	black	1x100W/G53	excl. transformer	130 mm

H = Einbautiefe / recessed depth

NO FRAME 150 DUO

2-fach Einbaustrahler für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisches gelagert, verwendbar für 12 V Halogen und LED oder mit LED-Modul 18 W, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

Double recessed downlight for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V halogen and LED or with LED module 18 W, please order driver (see page 156 ff.) and recessed frame (KIT) separately



LED module:
1900 Lumen *


dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D565	NO FRAME 150 DUO	white	2x18W LED 35° 3000K 500mA	excl. driver	130 mm
D566	NO FRAME 150 DUO	black	2x18W LED 35° 3000K 500mA	excl. driver	130 mm
D455	NO FRAME 150 DUO	white	2x100W/G53	excl. transformer	130 mm
D456	NO FRAME 150 DUO	black	2x100W/G53	excl. transformer	130 mm

Andere Leuchtmittelkombinationen auf Anfrage / Other lamp combinations on request


H = Einbautiefe / recessed depth

ACCESSORIES



Einbaurahmen für Serie NO FRAME 150 für Gipskartonplatten der Stärke 12,5 mm und 20 mm. Ausgleichsplatten für andere Gipskartonstärken auf Anfrage.
Recessed frame for NO FRAME 150 series for 12,5 mm and 20 mm plasterboards.
Compensating plates for other dimensions of plasterboards on request.

CODE	TYPE	COLOUR
D151	KIT 150	white
D152	KIT 150	black
D155	KIT 150 DUO	white
D156	KIT 150 DUO	black



Entblendungskonus für Serie NO FRAME 150
Anti glare cone for NO FRAME 150 series

CODE	TYPE	COLOUR
D158	ANTI GLARE CONE 150	white
D159	ANTI GLARE CONE 150	black





Architekt: OPW / Foto: Atelier Wolf





Architekt: Sonntag Planungsbüro

NO FRAME 80 ROUND

Einbaustrahler 12 V oder 230 V für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisch gelagert, verwendbar für 12 V oder 230 V Halogen und LED, Einbau-KIT bitte separat bestellen

Recessed downlight 12 V or 230 V, for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V or 230 V halogen and LED, please order recessed frame (KIT) separately





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D432	NO FRAME 80 ROUND	white	1x50W/GU5,3	excl. transformer	120 mm
D433	NO FRAME 80 ROUND	black	1x50W/GU5,3	excl. transformer	120 mm
D932	NO FRAME 80 ROUND	white	1x50W/GU10	-	140 mm
D933	NO FRAME 80 ROUND	black	1x50W/GU10	-	140 mm

H = Einbautiefe / recessed depth

NO FRAME 150 ROUND

Einbaustrahler für rand- und werkzeuglosen Einbau, Leuchtmittel kardanisch gelagert, verwendbar für 12 V Halogen und LED oder mit LED-Modul 18 W, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen


Recessed downlight for trimless assembly, mountable without tools, illuminant gimbal mounted, usable for 12 V halogen and LED or with LED module 18 W, please order driver (see page 156 ff.) and recessed frame (KIT) separately



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D541	NO FRAME 150 ROUND	white	1x18W LED 35° 3000K 500mA	excl. driver	120 mm
D542	NO FRAME 150 ROUND	black	1x18W LED 35° 3000K 500mA	excl. driver	120 mm
D471	NO FRAME 150 ROUND	white	1x100W/G53	excl. transformer	120 mm
D472	NO FRAME 150 ROUND	black	1x100W/G53	excl. transformer	120 mm

H = Einbautiefe / recessed depth

ACCESSORIES



Einbaurahmen für Serie NO FRAME 80 ROUND und NO FRAME 150 ROUND für Gipskartonplatten der Stärke 12,5 mm und 20 mm. Ausgleichsplatten für andere Gipskartonstärken auf Anfrage. Recessed frame for NO FRAME 80 ROUND and NO FRAME 150 ROUND series for 12,5 mm and 20 mm plasterboards. Compensating plates for other dimensions of plasterboards on request.

CODE	TYPE	COLOUR
D117	KIT 80 ROUND	white
D118	KIT 80 ROUND	black
D171	KIT 150 ROUND	white
D172	KIT 150 ROUND	black



Entblendungskonus für Serie NO FRAME 150
Anti glare cone for NO FRAME 150 series

CODE	TYPE	COLOUR
D158	ANTI GLARE CONE 150	white
D159	ANTI GLARE CONE 150	black





FRAME 100


LED-Einbaustrahler 20,9 W mit hochwertigem Aluminiumreflektor, LED kardanisch gelagert, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight
20,9 W with high value aluminium reflector, LED gimbal mounted, please order driver separately (see page 156 ff.)



A** - A

2040 Lumen



dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D213	FRAME 100	white	1x20,9W LED 38° 3000K 700mA excl. driver		145 mm

H = Einbautiefe / recessed depth

FRAME 100 DUO


LED-Einbaustrahler 2x20,9 W mit hochwertigem Aluminiumreflektor, LED kardanisch gelagert, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight
2x20,9 W with high value aluminium reflector, LED gimbal mounted, please order driver separately (see page 156 ff.)



A** - A

2x2040 Lumen



dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D713	FRAME 100 DUO	white	2x20,9W LED 38° 3000K 700mA excl. driver		145 mm

H = Einbautiefe / recessed depth

FRAME 100 ROUND


LED-Einbaustrahler 20,9 W mit hochwertigem Aluminiumreflektor, LED kardanisch gelagert, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight
20,9 W with high value aluminium reflector, LED gimbal mounted, please order driver separately (see page 156 ff.)



A** - A

2040 Lumen



dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D214	FRAME 100 ROUND	white	1x20,9W LED 38° 3000K 700mA excl. driver		145 mm

H = Einbautiefe / recessed depth

96

* Technische Informationen siehe Seite 158 | Lumenangaben sind Nominalwerte - * Technical information see page 158 | Lumen data are nominal data

RECESSED

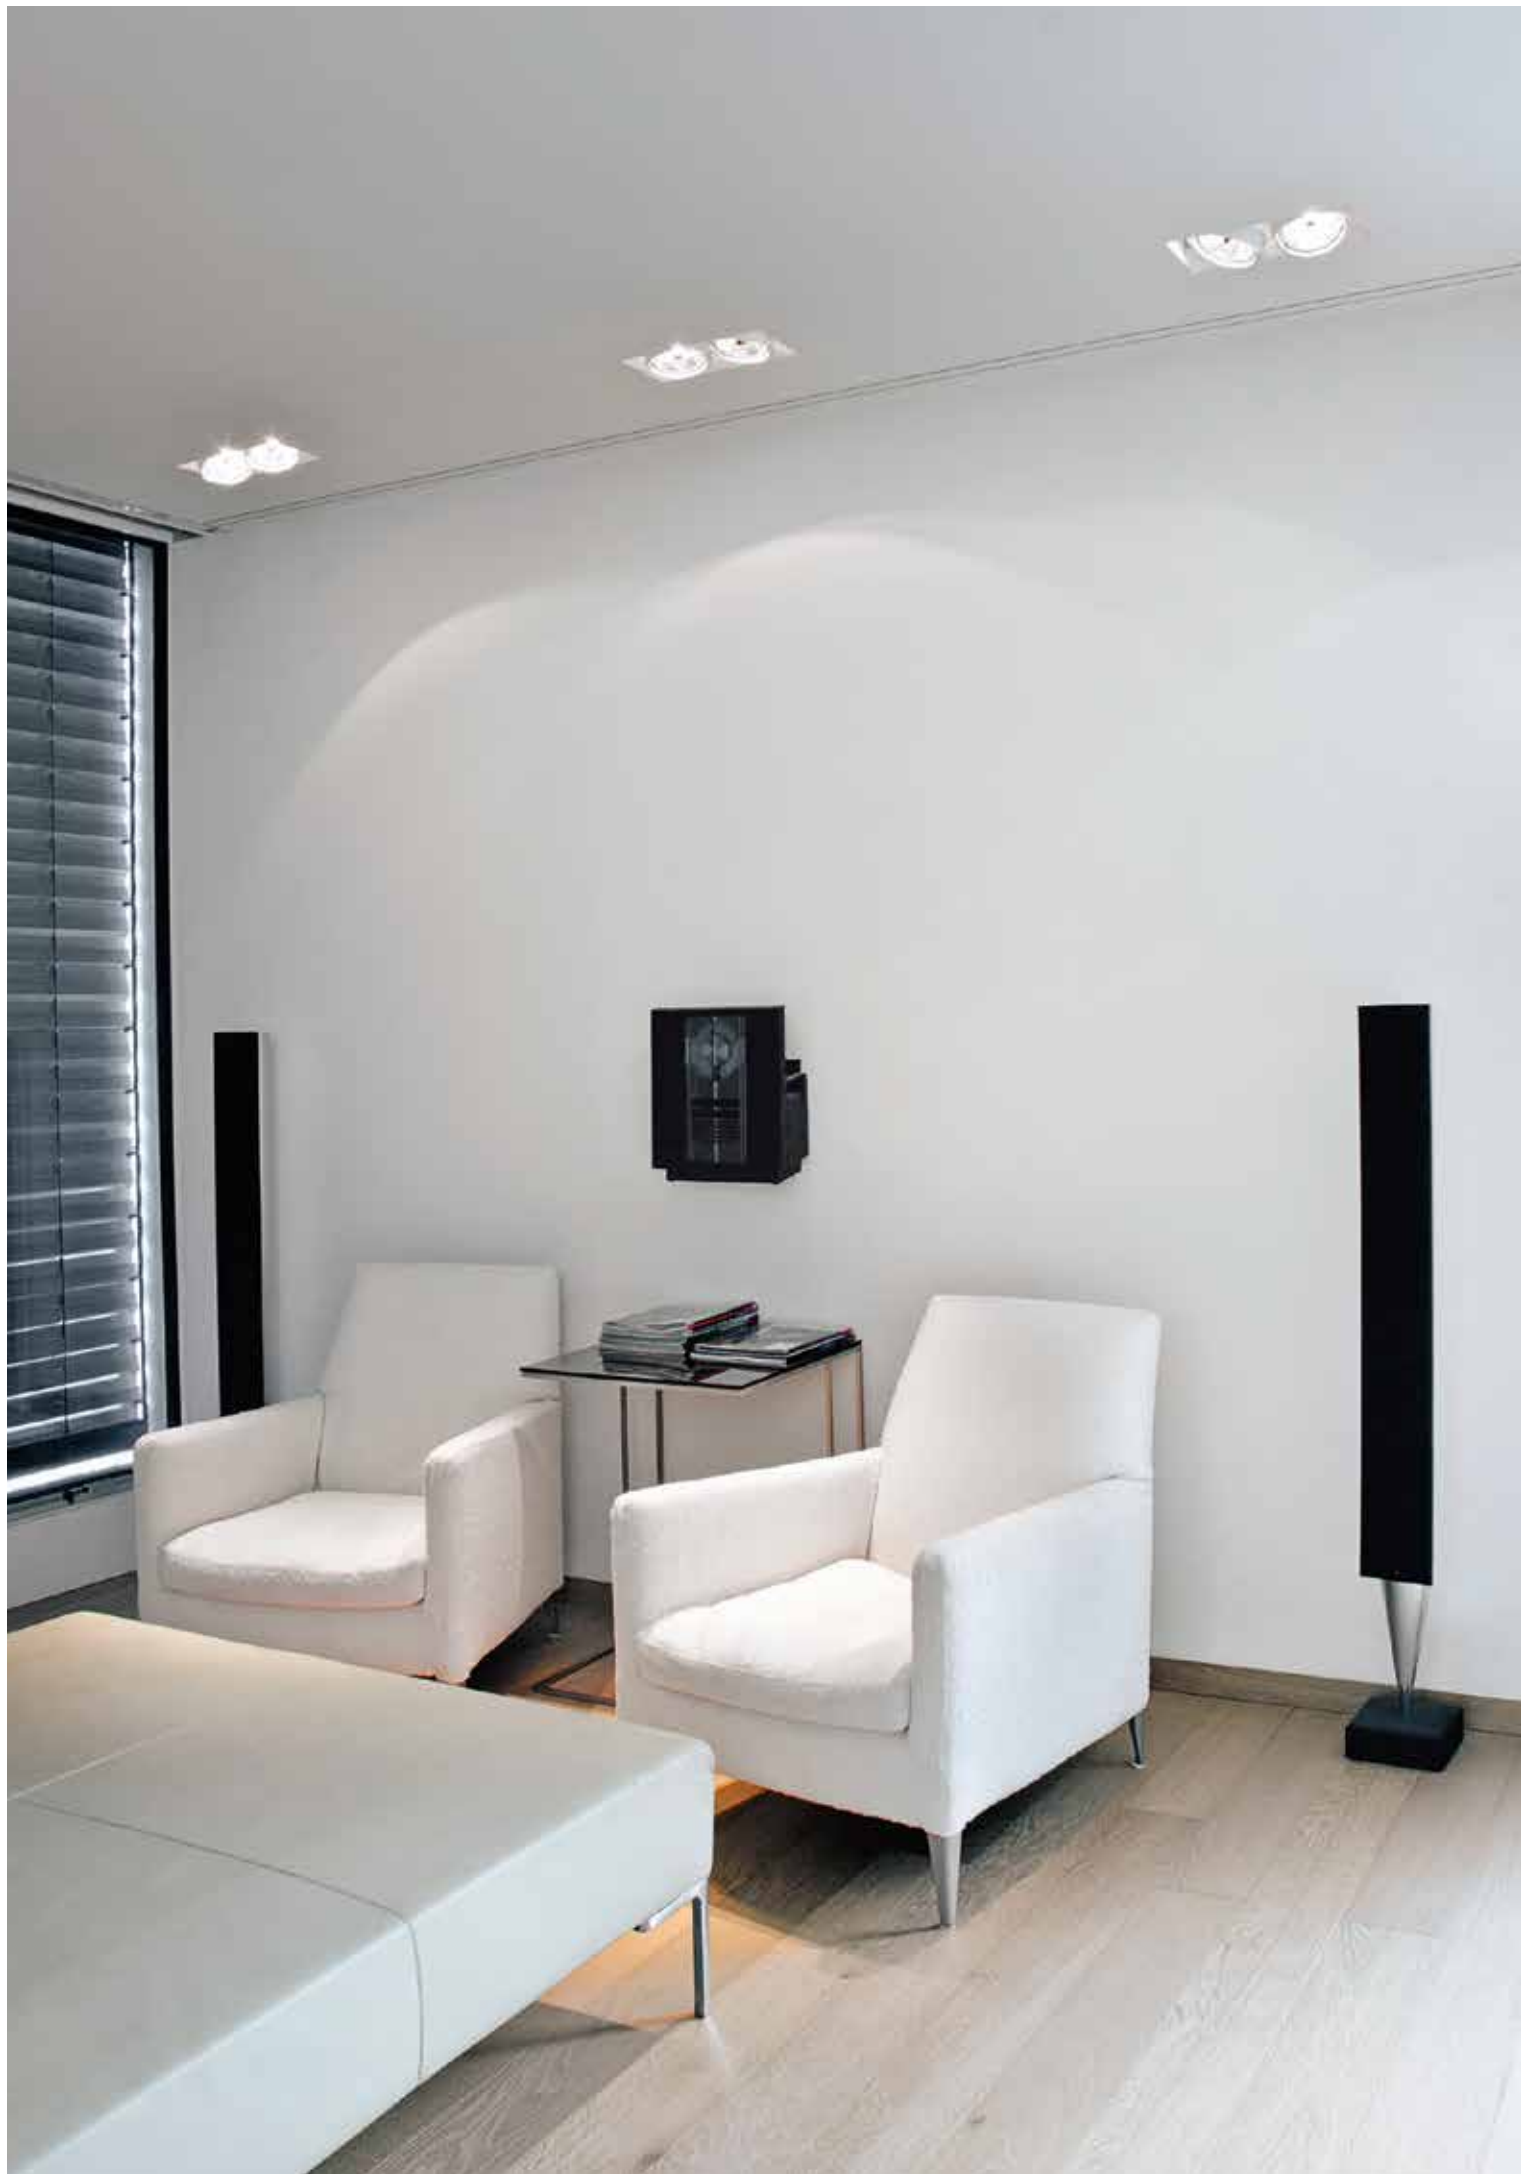

FRAME 150


Einbaustrahler, Leuchtmittel kardanisch gelagert, verwendbar für 12 V Halogen und LED oder mit LED-Modul 18 W, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

Recessed downlight, illuminant gimbal mounted, usable for 12 V halogen and LED or with LED module 18 W, please order driver (see page 156 ff.) and recessed frame (KIT) separately



LED module: 1900 Lumen *

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D581	FRAME 150	white	1x18W LED 35° 3000K 500mA	excl. driver	105 mm
D582	FRAME 150	black	1x18W LED 35° 3000K 500mA	excl. driver	105 mm
D491	FRAME 150	white	1x100W/G53	excl. transformer	105 mm
D492	FRAME 150	black	1x100W/G53	excl. transformer	105 mm

H = Einbautiefe / recessed depth

FRAME 150 DUO


2-fach Einbaustrahler, Leuchtmittel kardanisch gelagert, verwendbar für 12 V Halogen und LED oder mit LED-Modul 18 W, Driver (siehe Seite 156 ff.) und Einbau-KIT bitte separat bestellen

Double recessed downlight, illuminant gimbal mounted, usable for 12 V halogen and LED or with LED module 18 W, please order driver (see page 156 ff.) and recessed frame (KIT) separately



LED module: 1900 Lumen *

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D585	FRAME 150 DUO	white	2x18W LED 35° 3000K 500mA	excl. driver	105 mm
D586	FRAME 150 DUO	black	2x18W LED 35° 3000K 500mA	excl. driver	105 mm
D495	FRAME 150 DUO	white	2x100W/G53	excl. transformer	105 mm
D496	FRAME 150 DUO	black	2x100W/G53	excl. transformer	105 mm

Andere Leuchtmittelkombinationen auf Anfrage / Other lamp combinations on request

H = Einbautiefe / recessed depth

ACCESSORIES



Entblendungskonus für Serie NO FRAME 150
Anti glare cone for NO FRAME 150 series

CODE	TYPE	COLOUR
D158	ANTI GLARE CONE 150	white
D159	ANTI GLARE CONE 150	black





GANYMED


LED-Einbaustrahler 9,3 W mit hochwertigem Aluminiumreflektor, tiefer gesetzter LED, schwenkbar (2x25°), Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W with high value aluminium reflector, recessed LED, adjustable (2x25°), please order driver separately (see page 156 ff.)



*

1056 Lumen

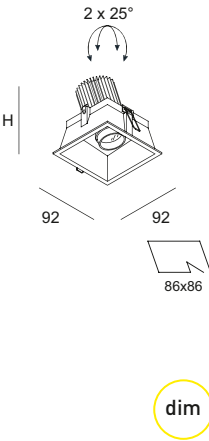

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D779	GANYMED	white	1x9,3W LED 32° 3000K 500mA	excl. driver	140 mm
D780	GANYMED	black	1x9,3W LED 32° 3000K 500mA	excl. driver	140 mm

H = Einbautiefe / recessed depth

COSMO



LED-Einbaustrahler 12 W aus massivem Aluminium, dreh- und schwenkbar (350°/2x30°), mit tiefer gesetzter LED und Entblendungsring, Reflektor wahlweise gold, schwarz oder chrom, inklusive Driver 230 V

LED-recessed downlight 12 W made of aluminium, adjustable (350°/2x30°), with recessed LED and anti glare ring, reflector optionally gold, black or chrome, including driver 230 V




*


860 Lumen

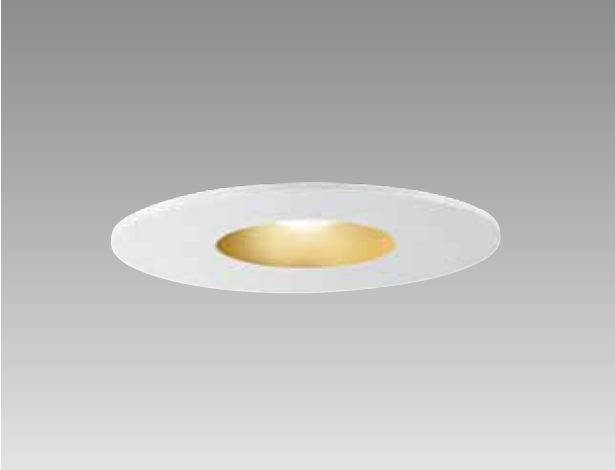

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D217	COSMO	white/black	1x12W LED 25° 3000K	incl. driver	130 mm
D218	COSMO	white/gold	1x12W LED 25° 3000K	incl. driver	130 mm
D219	COSMO	white/chrome	1x12W LED 25° 3000K	incl. driver	130 mm

H = Einbautiefe / recessed depth



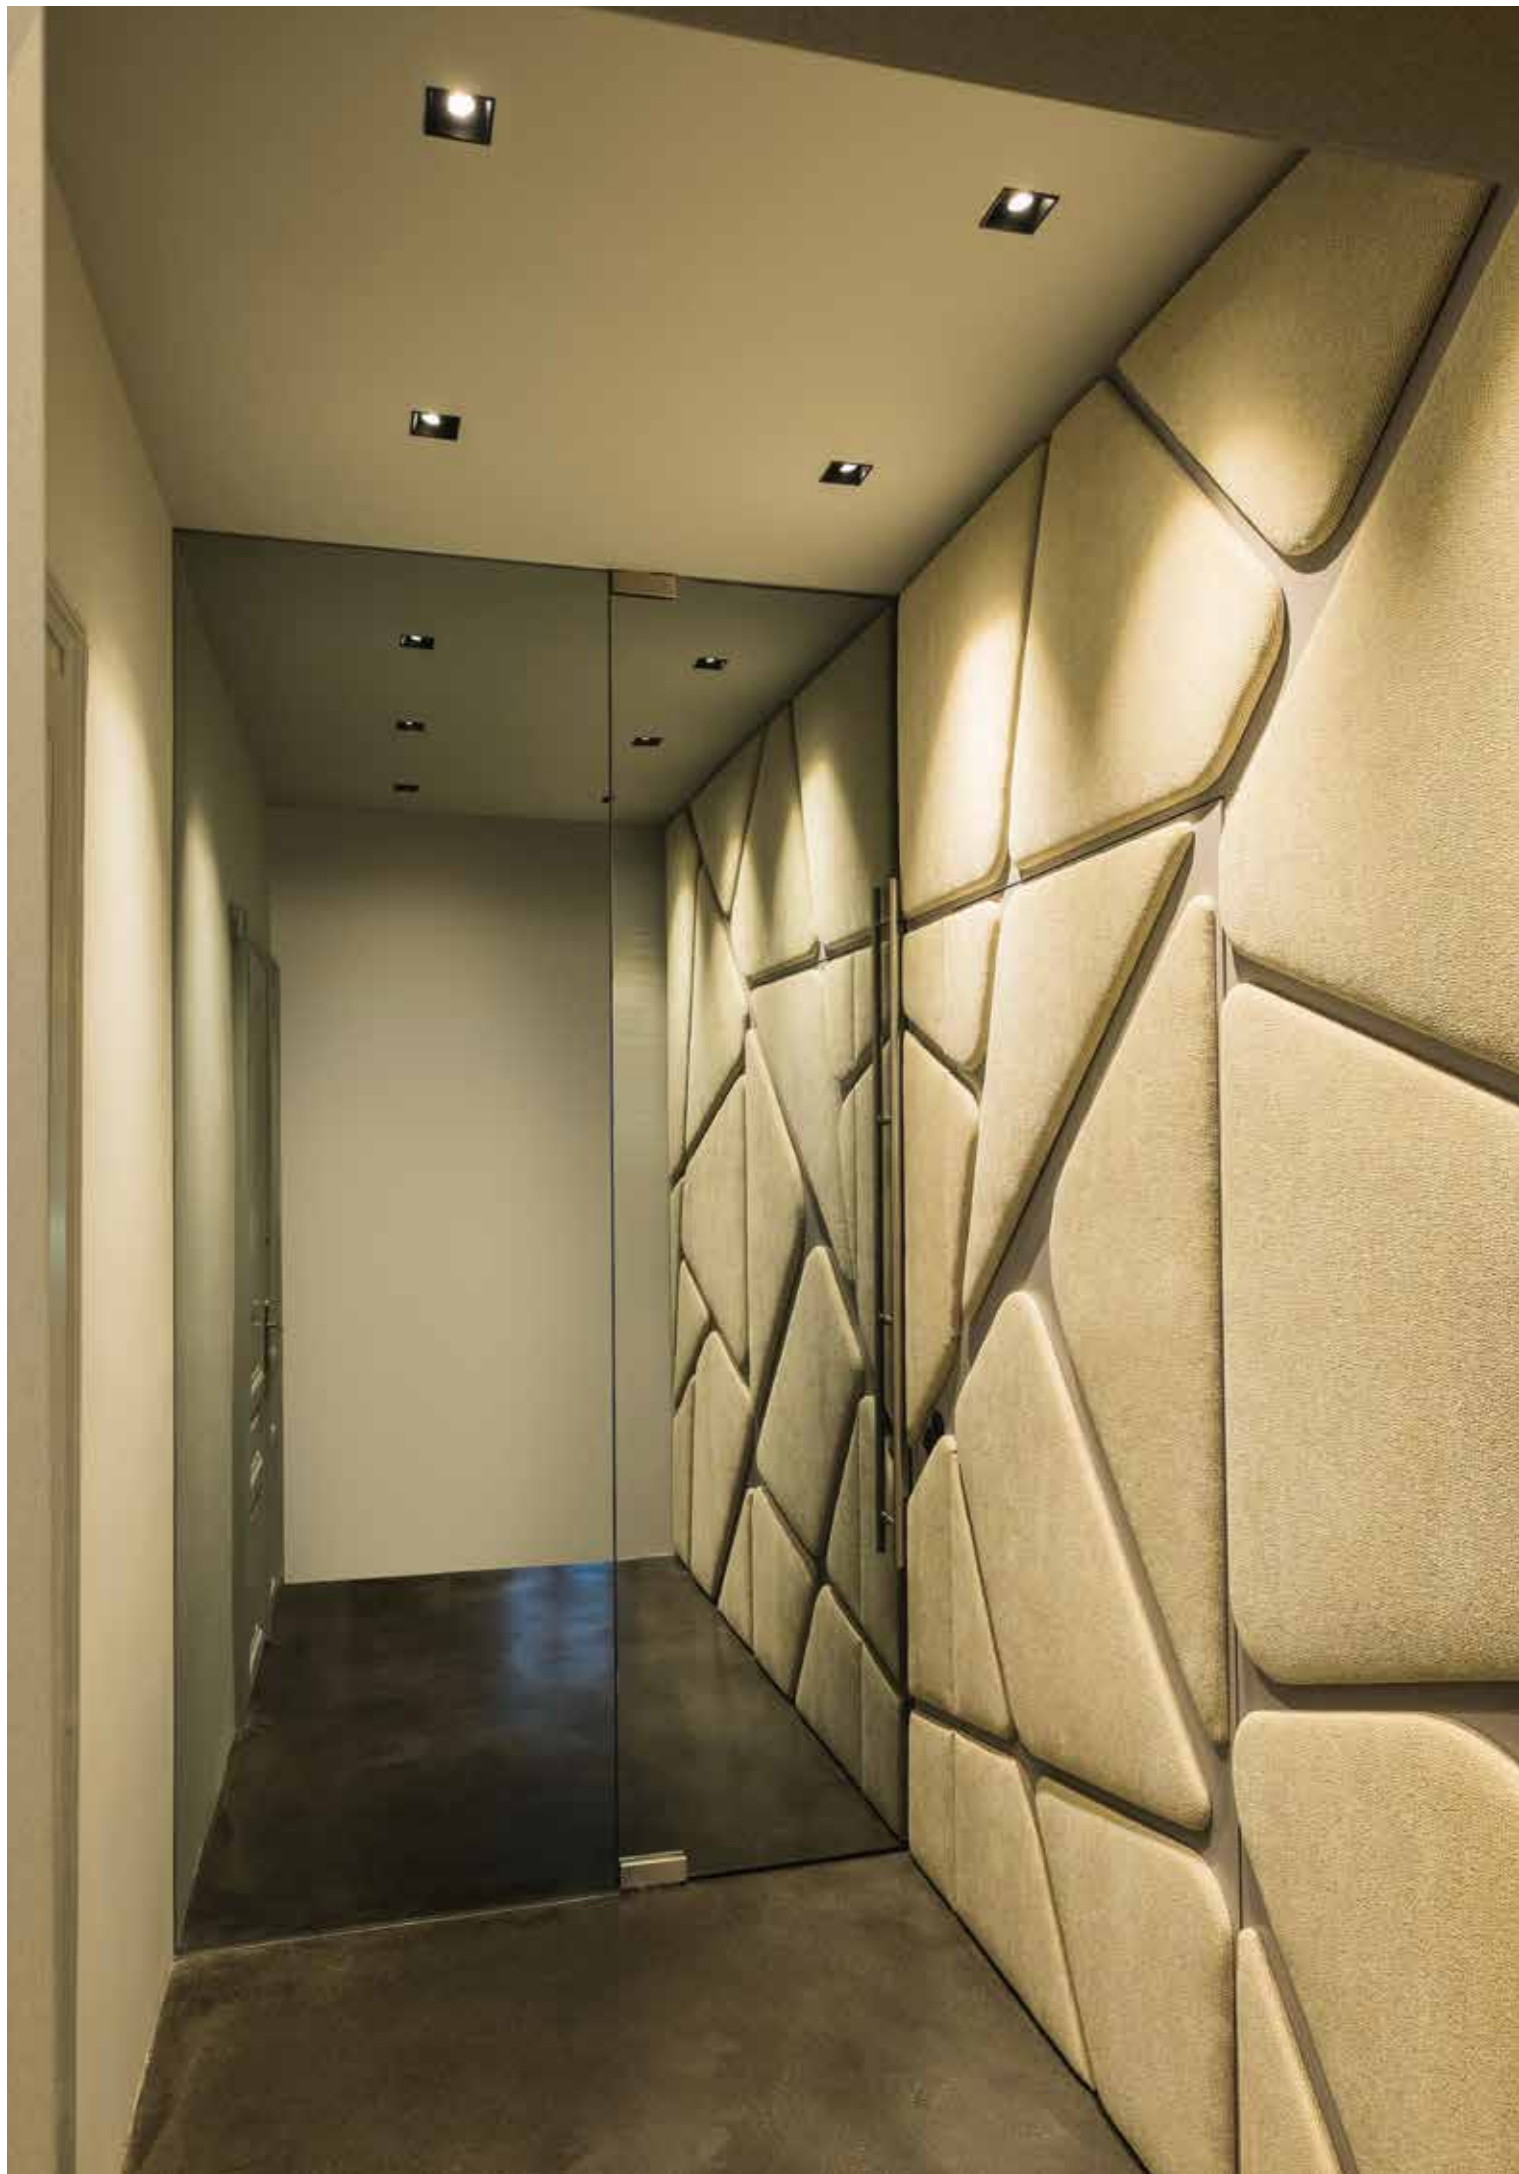

TWO LIGHT


LED Einbaustrahler 9,3 W, mit hochwertigem Aluminiumreflektor, tiefer gesetzter COB LED und zusätzlicher SMD LED für indirekten Lichteffect, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W with high value aluminium reflector, with recessed COB LED und additional SMD LED for indirect lighting effect, please order driver separately (see page 156 ff.)



*

1056 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D781	TWO LIGHT	white	1x9,3W LED 32°  3000K + 1x1,2W LED  amber / 500mA	excl. driver	100 mm

H = Einbautiefe / recessed depth

TWO LIGHT


LED Einbaustrahler 9,3 W, mit hochwertigem Aluminiumreflektor, tiefer gesetzter COB LED und zusätzlicher SMD LED für indirekten Lichteffect, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W with high value aluminium reflector, with recessed COB LED und additional SMD LED for indirect lighting effect, please order driver separately (see page 156 ff.)




*

1056 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D782	TWO LIGHT	white	1x9,3W LED 32°  3000K + 1x1,2W LED  3000K / 500mA	excl. driver	100 mm



H = Einbautiefe / recessed depth

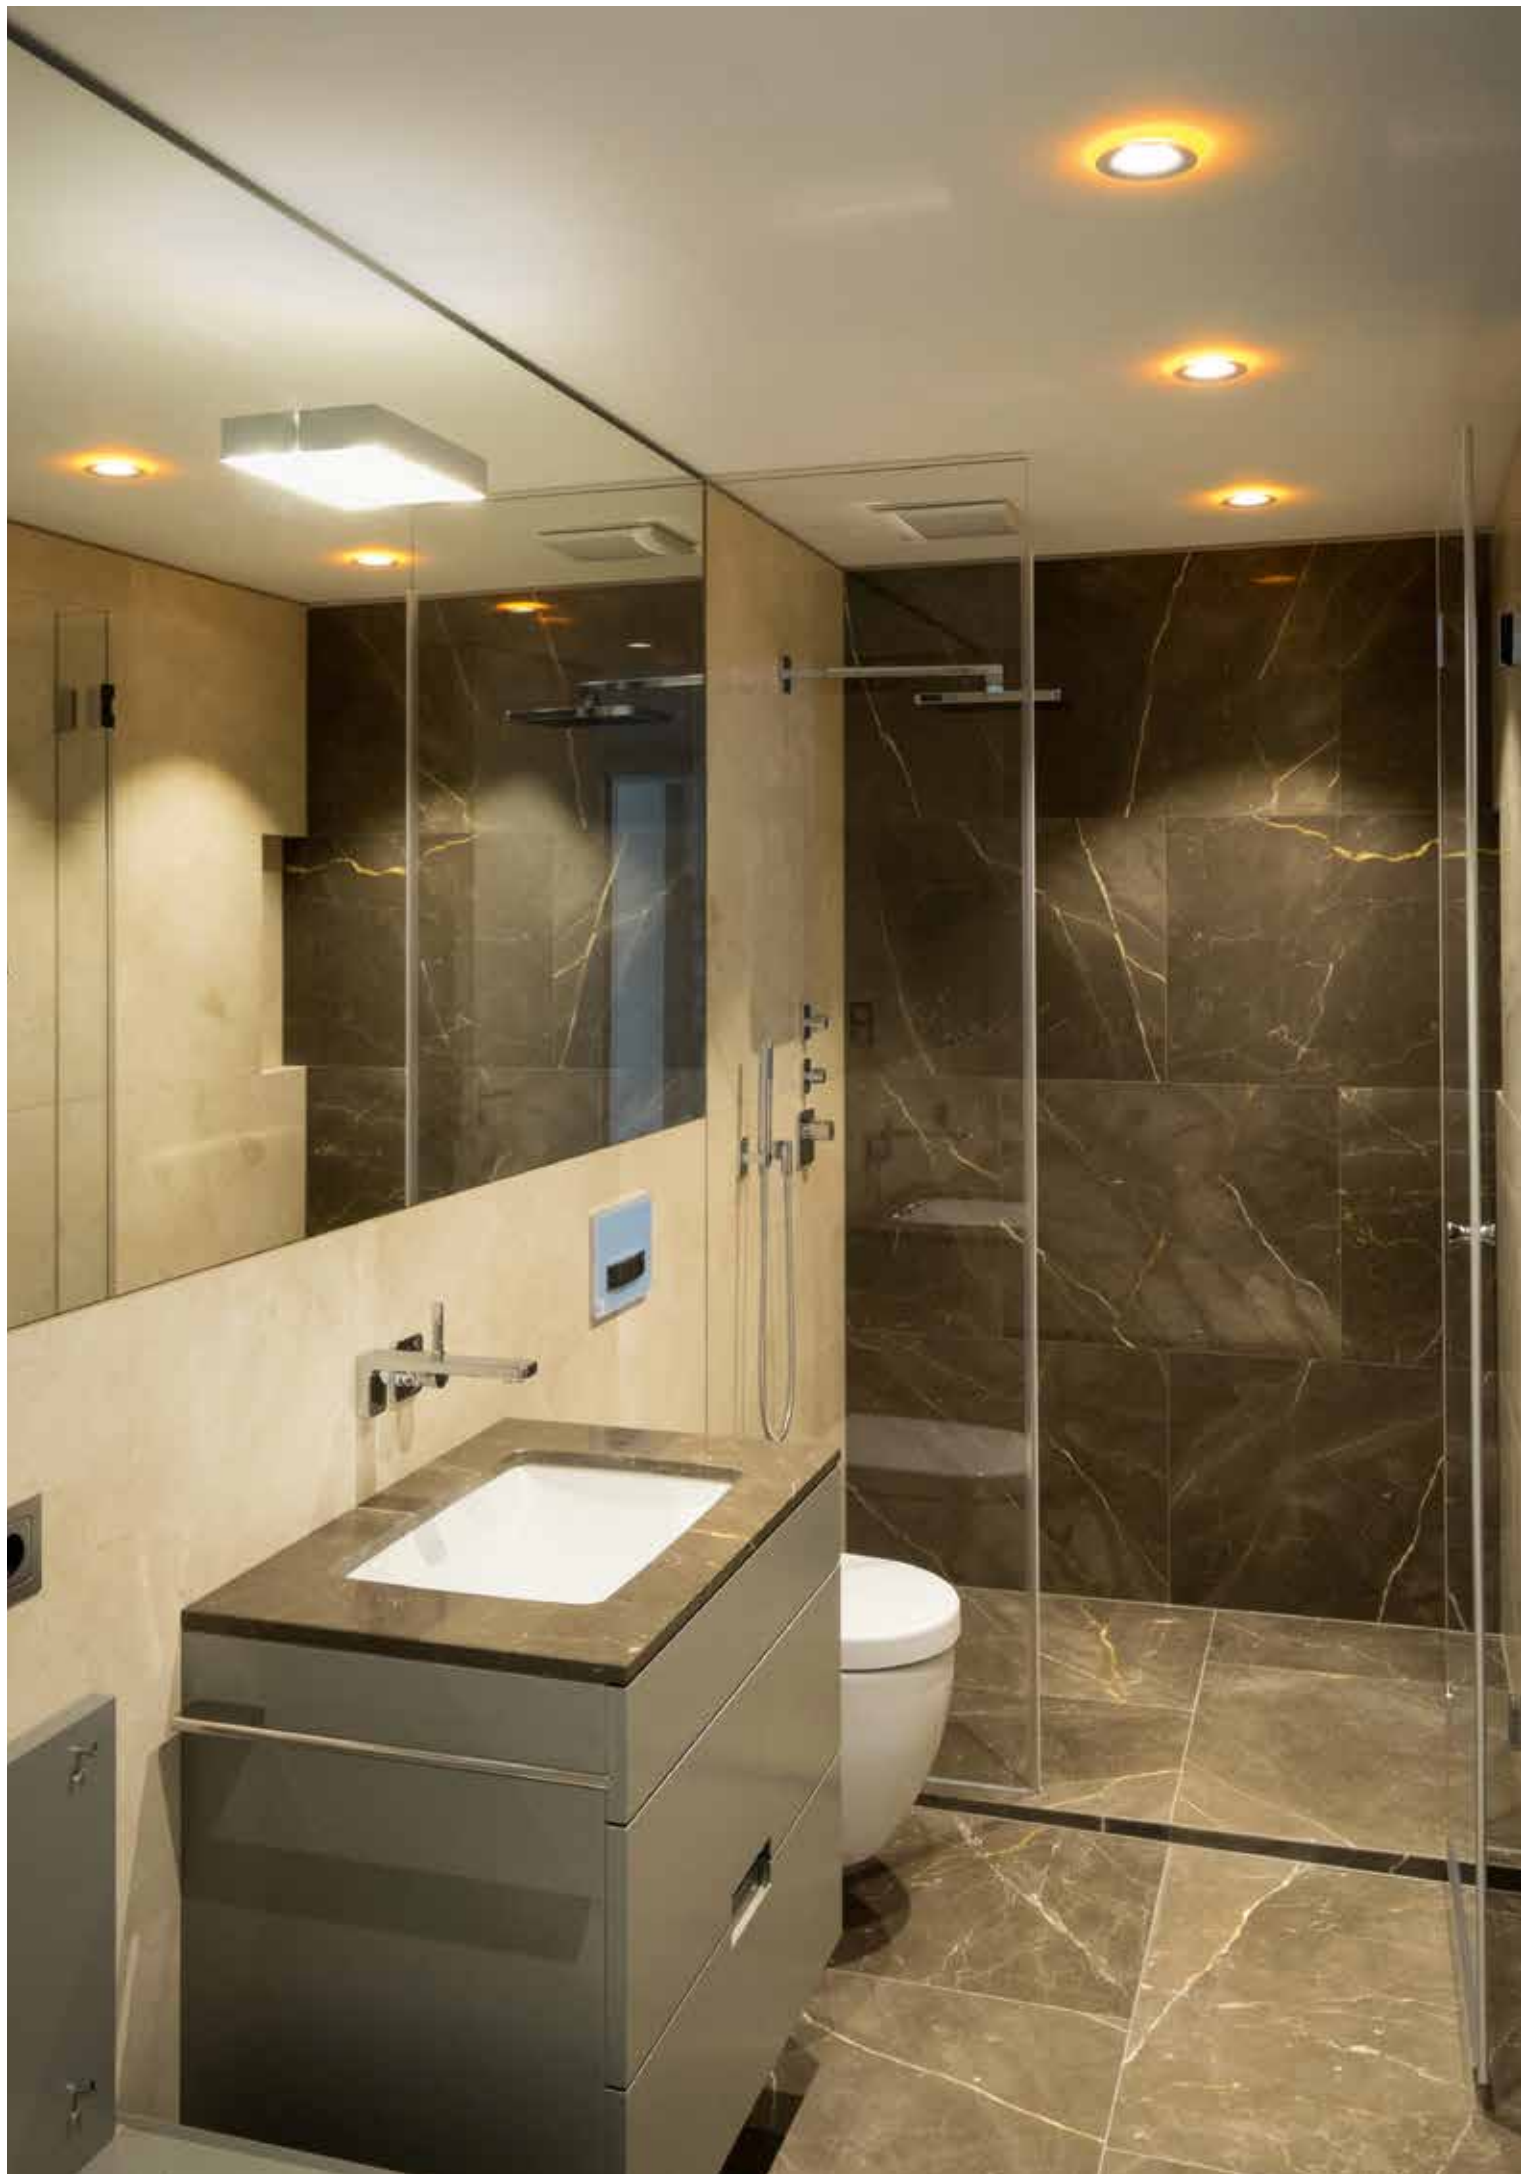

KYO

LED-Einbaustrahler 9,3 W aus massivem Aluminium, schwenkbar (2x30°), mit tiefer gesetzter LED und Entblendungsring, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W made of aluminium, adjustable (2x30°), with recessed LED and anti glare ring, please order driver separately (see page 156 ff.)



dim





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D851	KYO	white	1x9,3W LED 15° □ 3000K 500mA	excl. driver	90 mm
D852	KYO	white	1x9,3W LED 25° □ 3000K 500mA	excl. driver	90 mm
D853	KYO	white	1x9,3W LED 38° □ 3000K 500mA	excl. driver	90 mm

H = Einbautiefe / recessed depth

RENA

LED-Einbaustrahler 9,3 W aus massivem Aluminium, schwenkbar (2x30°), mit tiefer gesetzter LED und Entblendungsring, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W made of aluminium, adjustable (2x30°), with recessed LED and anti glare ring, please order driver separately (see page 156 ff.)



dim





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D861	RENA	white	1x9,3W LED 15° □ 3000K 500mA	excl. driver	110 mm
D862	RENA	white	1x9,3W LED 25° □ 3000K 500mA	excl. driver	110 mm
D863	RENA	white	1x9,3W LED 38° □ 3000K 500mA	excl. driver	110 mm

H = Einbautiefe / recessed depth

CREDO

LED-Einbaustrahler 9,3 W aus massivem Aluminium, dreh- und schwenkbar (350°/2x30°), mit tiefer gesetzter LED und Entblendungsring, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 9,3 W made of aluminium, adjustable (350°/2x30°), with recessed LED and anti glare ring, please order driver separately (see page 156 ff.)



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D871	CREDO	white	1x9,3W LED 15° □ 3000K 500mA	excl. driver	110 mm
D872	CREDO	white	1x9,3W LED 25° □ 3000K 500mA	excl. driver	110 mm
D873	CREDO	white	1x9,3W LED 38° □ 3000K 500mA	excl. driver	110 mm

H = Einbautiefe / recessed depth



MK 90


LED-Einbaustrahler 230 V, mit 10 W AC-LED, hochwertigem Aluminiumreflektor, mit tiefer gesetzter LED, inklusive elektronischem Überspannungsschutz, IP44

LED-recessed downlight 230 V, with 10 W AC-LED, high value aluminium reflector, with recessed LED, including surge protection, IP44



*

850 Lumen



IP44

230 V
LED



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D786	MK 90	white	1x10W LED 40°  3000K	230 V	110 mm

H = Einbautiefe / recessed depth

MK 110


LED-Einbaustrahler 230 V, mit 10 W AC-LED, hochwertigem Aluminiumreflektor, dreh- und schwenkbar (360°/2x30°), mit tiefer gesetzter LED, inklusive elektronischem Überspannungsschutz, IP44

LED-recessed downlight 230 V, with 10 W AC-LED, high value aluminium reflector, adjustable (360°/2x30°), with recessed LED, including surge protection, IP44



*

850 Lumen



IP44

230 V
LED



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D787	MK 110	white	1x10W LED 40°  3000K	230 V	110 mm

H = Einbautiefe / recessed depth

MK Q


LED-Einbaustrahler 230 V, mit 10 W AC-LED, hochwertigem Aluminiumreflektor, schwenkbar (2x30°), mit tiefer gesetzter LED, inklusive elektronischem Überspannungsschutz, IP44

LED-recessed downlight 230 V, with 10 W AC-LED, high value aluminium reflector, adjustable (2x30°), with recessed LED, including surge protection, IP44



*

850 Lumen



IP44

230 V
LED



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D749	MK Q	white	1x10W LED 40°  3000K	230 V	120 mm


H = Einbautiefe / recessed depth



BIG

Einbaustrahler 12 V oder 230 V schwenkbar (2 x 10°), mit tiefer gesetztem Leuchtmittel und Entblendungsring, verwendbar für 12 V oder 230 V Halogen und LED

Recessed downlight 12 V or 230 V adjustable (2 x 10°), with recessed illuminant and anti glare ring, usable for 12 V or 230 V halogen and LED



dim




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D406	BIG	grey	1x50W/GU5,3	excl. transformer	110 mm
D407	BIG	white	1x50W/GU5,3	excl. transformer	110 mm
D306	BIG	grey	1x50W/GU10	-	110 mm
D307	BIG	white	1x50W/GU10	-	110 mm

H = Einbautiefe / recessed depth

CONE

Einbaustrahler 12 V oder 230 V schwenkbar (2 x 30°), mit abnehmbarem Entblendungskonus, verwendbar für 12 V oder 230 V Halogen und LED

Recessed downlight 12 V or 230 V adjustable (2 x 30°), with removable anti glare cone, usable for 12 V or 230 V halogen and LED



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D440	CONE	white	1x50W/GU5,3	excl. transformer	90 mm
D441	CONE	grey	1x50W/GU5,3	excl. transformer	90 mm
D442	CONE	black	1x50W/GU5,3	excl. transformer	90 mm
D940	CONE	white	1x50W/GU10 ¹	-	100 mm
D941	CONE	grey	1x50W/GU10 ¹	-	100 mm
D942	CONE	black	1x50W/GU10 ¹	-	100 mm



¹ 230 V Halogen mit Entblendungskonus max. 35 W / ¹ 230 V halogen with anti glare cone maximum 35 W

H = Einbautiefe / recessed depth

DEXTER

Einbaustrahler 12 V oder 230 V schwenkbar (2 x 30°), mit tiefer gesetztem Leuchtmittel und Entblendungsring, verwendbar für 12 V oder 230 V Halogen und LED

Recessed downlight 12 V or 230 V adjustable (2 x 30°), with recessed illuminant and anti glare ring, usable for 12 V or 230 V halogen and LED



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D430	DEXTER	chrome	1x50W/GU5,3	excl. transformer	110 mm
D431	DEXTER	white	1x50W/GU5,3	excl. transformer	110 mm
D930	DEXTER	chrome	1x50W/GU10	-	110 mm
D931	DEXTER	white	1x50W/GU10	-	110 mm




H = Einbautiefe / recessed depth



ALASKA

LED-Einbaustrahler 10 W mit hochwertigem Aluminiumreflektor und Glasabdeckung, Driver bitte separat bestellen (siehe Seite 156 ff.), IP54

LED-recessed downlight 10 W with high value aluminium reflector and glass cover, please order driver separately (see page 156 ff.), IP54





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D798	ALASKA	white	1x10W LED 32° 3000K 500mA	excl. driver	70 mm

H = Einbautiefe / recessed depth

DONUT

Einbaustrahler 12 V oder 230 V mit tiefer gesetztem Leuchtmittel, verwendbar für 12 V oder 230 V Halogen und LED

Recessed downlight 12 V or 230 V with recessed illuminant, usable for 12 V or 230 V halogen and LED





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D419	DONUT	white	1x50W/GU5,3	excl. transformer	125 mm
D319	DONUT	white	1x50W/GU10	-	125 mm

H = Einbautiefe / recessed depth

SONO

Einbaustrahler 12 V oder 230 V schwenkbar (2x 15°), mit tiefer gesetztem Leuchtmittel, verwendbar für 12 V oder 230 V Halogen und LED

Recessed downlight 12 V or 230 V adjustable (2x 15°), with recessed illuminant, usable for 12 V or 230 V halogen and LED



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D423	SONO	white	1x50W/GU5,3	excl. transformer	90 mm
D323	SONO	white	1x50W/GU10	-	100 mm

H = Einbautiefe / recessed depth



ROYAL S


LED-Einbaustrahler 7,2 W mit Linsenoptik und Acrylglas-aufsatz, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 7,2 W with optic lenses and acryl glass cover, please order driver separately (see page 156 ff.)



*

410 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D248	ROYAL S	opal white	3x2,4W LED 3000K 500mA	excl. driver	75 mm

H = Einbautiefe / recessed depth

ROYAL


LED-Einbaustrahler 14,4 W mit Linsenoptik und Acrylglas-aufsatz, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 14,4 W with optic lenses and acryl glass cover, please order driver separately (see page 156 ff.)



*

820 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D249	ROYAL	opal white	6x2,4W LED 3000K 500mA	excl. driver	75 mm



H = Einbautiefe / recessed depth



LUNA ROUND

Einbaustrahler mit Acrylglasabdeckung, erhältlich für Leuchtstoff, bzw. LED-Leuchtmittel oder 6 W LED (inklusive Driver)

Recessed downlight 230 V with acryl glass cover, available for fluorescent and accordingly LED-lamp or 6 W LED (including driver)





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D640	LUNA ROUND	opal white	1x6W/GX53	-	50 mm
D240	LUNA ROUND	opal white	1x6W LED 3000K	external driver included	70 mm

H = Einbautiefe / recessed depth

LUNA SQUARE

Einbaustrahler mit Acrylglasabdeckung, erhältlich für Leuchtstoff, bzw. LED-Leuchtmittel oder 6 W LED (inklusive Driver)

Recessed downlight 230 V with acryl glass cover, available for fluorescent and accordingly LED-lamp or 6 W LED (including driver)





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D641	LUNA SQUARE	opal white	1x6W/GX53	-	50 mm
D241	LUNA SQUARE	opal white	1x6W LED 3000K	external driver included	70 mm

H = Einbautiefe / recessed depth

ELARA

LED-Halbeinbaustrahler 3 W, aus massivem Aluminium natur gebürstet mit Acrylglas, Driver bitte separat bestellen (siehe Seite 156 ff.), für den Innen- und Außenbereich verwendbar, IP54

LED-recessed luminaire with 3 W, made of natural brushed aluminium with acrylic glass, please order driver separately (see page 156 ff.), to be used in indoor and outdoor areas, IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D811	ELARA	alu	1x3W LED 3000K 700mA	excl. driver	40 mm


H = Einbautiefe / recessed depth



PHANTOM

Wand- und Deckenhalbeinbauleuchte aus massivem Aluminium, erhältlich für 12 V Halogen und 2 W LED, Transformator oder Driver bitte separat bestellen (siehe Seite 156 ff.)

Wall and ceiling recessed luminaire made of aluminum, available for 12 V halogen and 2 W LED, please order transformer or driver separately (see page 156 ff.)



dim



A++-E 3000K: 170 Lumen
5000K: 200 Lumen *




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D420-03	PHANTOM	alu	1x2W LED □ 5000K 500mA	excl. driver	50 mm
D420-09	PHANTOM	alu	1x2W LED □ 3000K 500mA	excl. driver	50 mm
D420-04	PHANTOM	alu	1x2W LED ■ blue 500mA	excl. driver	50 mm
D420-07	PHANTOM	alu	1x2W LED ■ red 500mA	excl. driver	50 mm
D420-15	PHANTOM	alu	1x2W LED ■ green 500mA	excl. driver	50 mm
D420-16	PHANTOM	alu	1x2W LED ■ amber 500mA	excl. driver	50 mm
D420	PHANTOM	alu	1x20W/G4	excl. transformer	50 mm

H = Einbautiefe / recessed depth

TAIFUN

Wand- und Deckenhalbeinbauleuchte aus massivem Aluminium, erhältlich für 12 V Halogen und 2 W LED, Transformator oder Driver bitte separat bestellen (siehe Seite 156 ff.)

Wall and ceiling recessed luminaire made of aluminum, available for 12 V halogen and 2 W LED, please order transformer or driver separately (see page 156 ff.)



dim



A++-E 3000K: 170 Lumen
5000K: 200 Lumen *



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D421-03	TAIFUN	alu	1x2W LED □ 5000K 500mA	excl. driver	50 mm
D421-09	TAIFUN	alu	1x2W LED □ 3000K 500mA	excl. driver	50 mm
D421-04	TAIFUN	alu	1x2W LED ■ blue 500mA	excl. driver	50 mm
D421-07	TAIFUN	alu	1x2W LED ■ red 500mA	excl. driver	50 mm
D421-15	TAIFUN	alu	1x2W LED ■ green 500mA	excl. driver	50 mm
D421-16	TAIFUN	alu	1x2W LED ■ amber 500mA	excl. driver	50 mm
D421	TAIFUN	alu	1x20W/G4	excl. transformer	50 mm


H = Einbautiefe / recessed depth



VULCANO

LED-Einbaustrahler 4 x 1 W
mit Acrylglasabdeckung opal
und Linsenoptik, Driver bitte
separat bestellen (siehe
Seite 156 ff.), IP54

LED-recessed downlight
4 x 1 W with opal acryl glass
cover and optic lenses, please
order driver separately (see
page 156 ff.), IP54





*

320 Lumen

IP54

dim




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D250	VULCANO	opal white	4x1W LED 3000K 350mA	excl. driver	60 mm

H = Einbautiefe / recessed depth

VULCANO Q

LED-Einbaustrahler 9 x 1 W
mit Acrylglasabdeckung opal
und Linsenoptik, Driver bitte
separat bestellen (siehe
Seite 156 ff.), IP54

LED-recessed downlight
9 x 1 W with opal acryl glass
cover and optic lenses, please
order driver separately (see
page 156 ff.), IP54





*

720 Lumen

IP54

dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D251	VULCANO Q	opal white	9x1W LED 3000K 350mA	excl. driver	60 mm

H = Einbautiefe / recessed depth



PLANE S

LED-Einbauleuchte 12 W aus massivem Aluminium, mit satinierter Acrylglasabdeckung, extra flache Bauform, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed downlight 12 W made of aluminium, with satined acrylic glass cover, special flat design, please order driver separately (see page 156 ff.)



A** - A

*

1320 Lumen



dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D268	PLANE S	white	12W LED 3000K 350mA	excl. driver	50 mm

H = Einbautiefe / recessed depth

PLANE

LED-Einbauleuchte 16 W aus massivem Aluminium, mit satinierter Acrylglasabdeckung, extra flache Bauform, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed downlight 16 W made of aluminium, with satined acrylic glass cover, special flat design, please order driver separately (see page 156 ff.)



A** - A

*

1760 Lumen



dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D269	PLANE	white	16W LED 3000K 350mA	excl. driver	50 mm

H = Einbautiefe / recessed depth

120

* Technische Informationen siehe Seite 158 | Lumenangaben sind Nominalwerte - * Technical information see page 158 | Lumen data are nominal data

RECESSED




IDOWN 13

LED-Einbaustrahler 13 W mit hochwertigem Aluminiumreflektor und spezieller Glasabdeckung, Driver bitte separat bestellen (siehe Seite 156 ff.), IP54

LED-recessed downlight 13 W with high value aluminium reflector and special glass cover, please order driver separately (see page 156 ff.), IP54









CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D791	IDOWN 13	white	1x13W LED 30°  3000K 350mA	excl. driver	110 mm


H = Einbautiefe / recessed depth

IDOWN 26

LED-Einbaustrahler 26 W mit hochwertigem Aluminiumreflektor und spezieller Glasabdeckung, Driver bitte separat bestellen (siehe Seite 156 ff.), IP54

LED-recessed downlight 26 W with high value aluminium reflector and special glass cover, please order driver separately (see page 156 ff.), IP54









CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D792	IDOWN 26	white	1x26W LED 30°  3000K 700mA	excl. driver	115 mm

H = Einbautiefe / recessed depth



CITY XS

LED-Einbaudownlight 10,2 W, mit extra tief gesetzten LEDs und Linsenoptik, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed downlight 10,2 W, with recessed illuminant and optical lenses, please order driver separately (see page 156 ff.)



*

A++-A

660 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D793	CITY XS	white	3x3,4W LED 36° 3000K 1050mA excl. driver		105 mm
D993	CITY XS	gold	3x3,4W LED 36° 3000K 1050mA excl. driver		105 mm

H = Einbautiefe / recessed depth

CITY S

LED-Einbaudownlight 17 W, mit extra tief gesetzten LEDs und Linsenoptik, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed downlight 17 W, with recessed illuminant and optical lenses, please order driver separately (see page 156 ff.)



*

A++-A

1100 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D256	CITY S	white	5x3,4W LED 36° 3000K 1050mA excl. driver		122 mm
D956	CITY S	gold	5x3,4W LED 36° 3000K 1050mA excl. driver		122 mm

H = Einbautiefe / recessed depth

CITY

LED-Einbaudownlight 23,8 W, mit extra tief gesetzten LEDs und Linsenoptik, Driver bitte separat bestellen (siehe Seite 156 ff.)


LED-recessed downlight 23,8 W, with recessed illuminant and optical lenses, please order driver separately (see page 156 ff.)



*

A++-A

1540 Lumen



dim



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D257	CITY	white	7x3,4W LED 36° 3000K 1050mA excl. driver		132 mm
D957	CITY	gold	7x3,4W LED 36° 3000K 1050mA excl. driver		132 mm

H = Einbautiefe / recessed depth



NEXO

LED-Einbaustrahler 10 W, schwenkbar (45°), Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 10 W, adjustable (45°), please order driver separately (see page 156 ff.)

A** - A

460 Lumen

dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D232	NEXO	grey	1x10W LED 3000K 700mA	excl. driver	125 mm
D238	NEXO	white	1x10W LED 3000K 700mA	excl. driver	125 mm

H = Einbautiefe / recessed depth

CENTRO

LED-Einbaudownlight 13 W, mit hochwertigem Aluminium-Darklightreflektor, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 13 W, with high value aluminium darklight reflector, please order driver separately (see page 156 ff.)

A** - A

1560 Lumen

dim

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D212	CENTRO	white	1x13W LED 69° 3000K 350mA	excl. driver	130 mm

H = Einbautiefe / recessed depth

CENTRO XL

LED-Einbaudownlight 26 W, mit hochwertigem Aluminium-Darklightreflektor, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 26 W, with high value aluminium darklight reflector, please order driver separately (see page 156 ff.)

A** - A

2720 Lumen

dim


CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D258	CENTRO XL	white	1x26W LED 60° 3000K 700mA	excl. driver	160 mm

H = Einbautiefe / recessed depth

126

* Technische Informationen siehe Seite 158 | Lumenangaben sind Nominalwerte - * Technical information see page 158 | Lumen data are nominal data

RECESSED

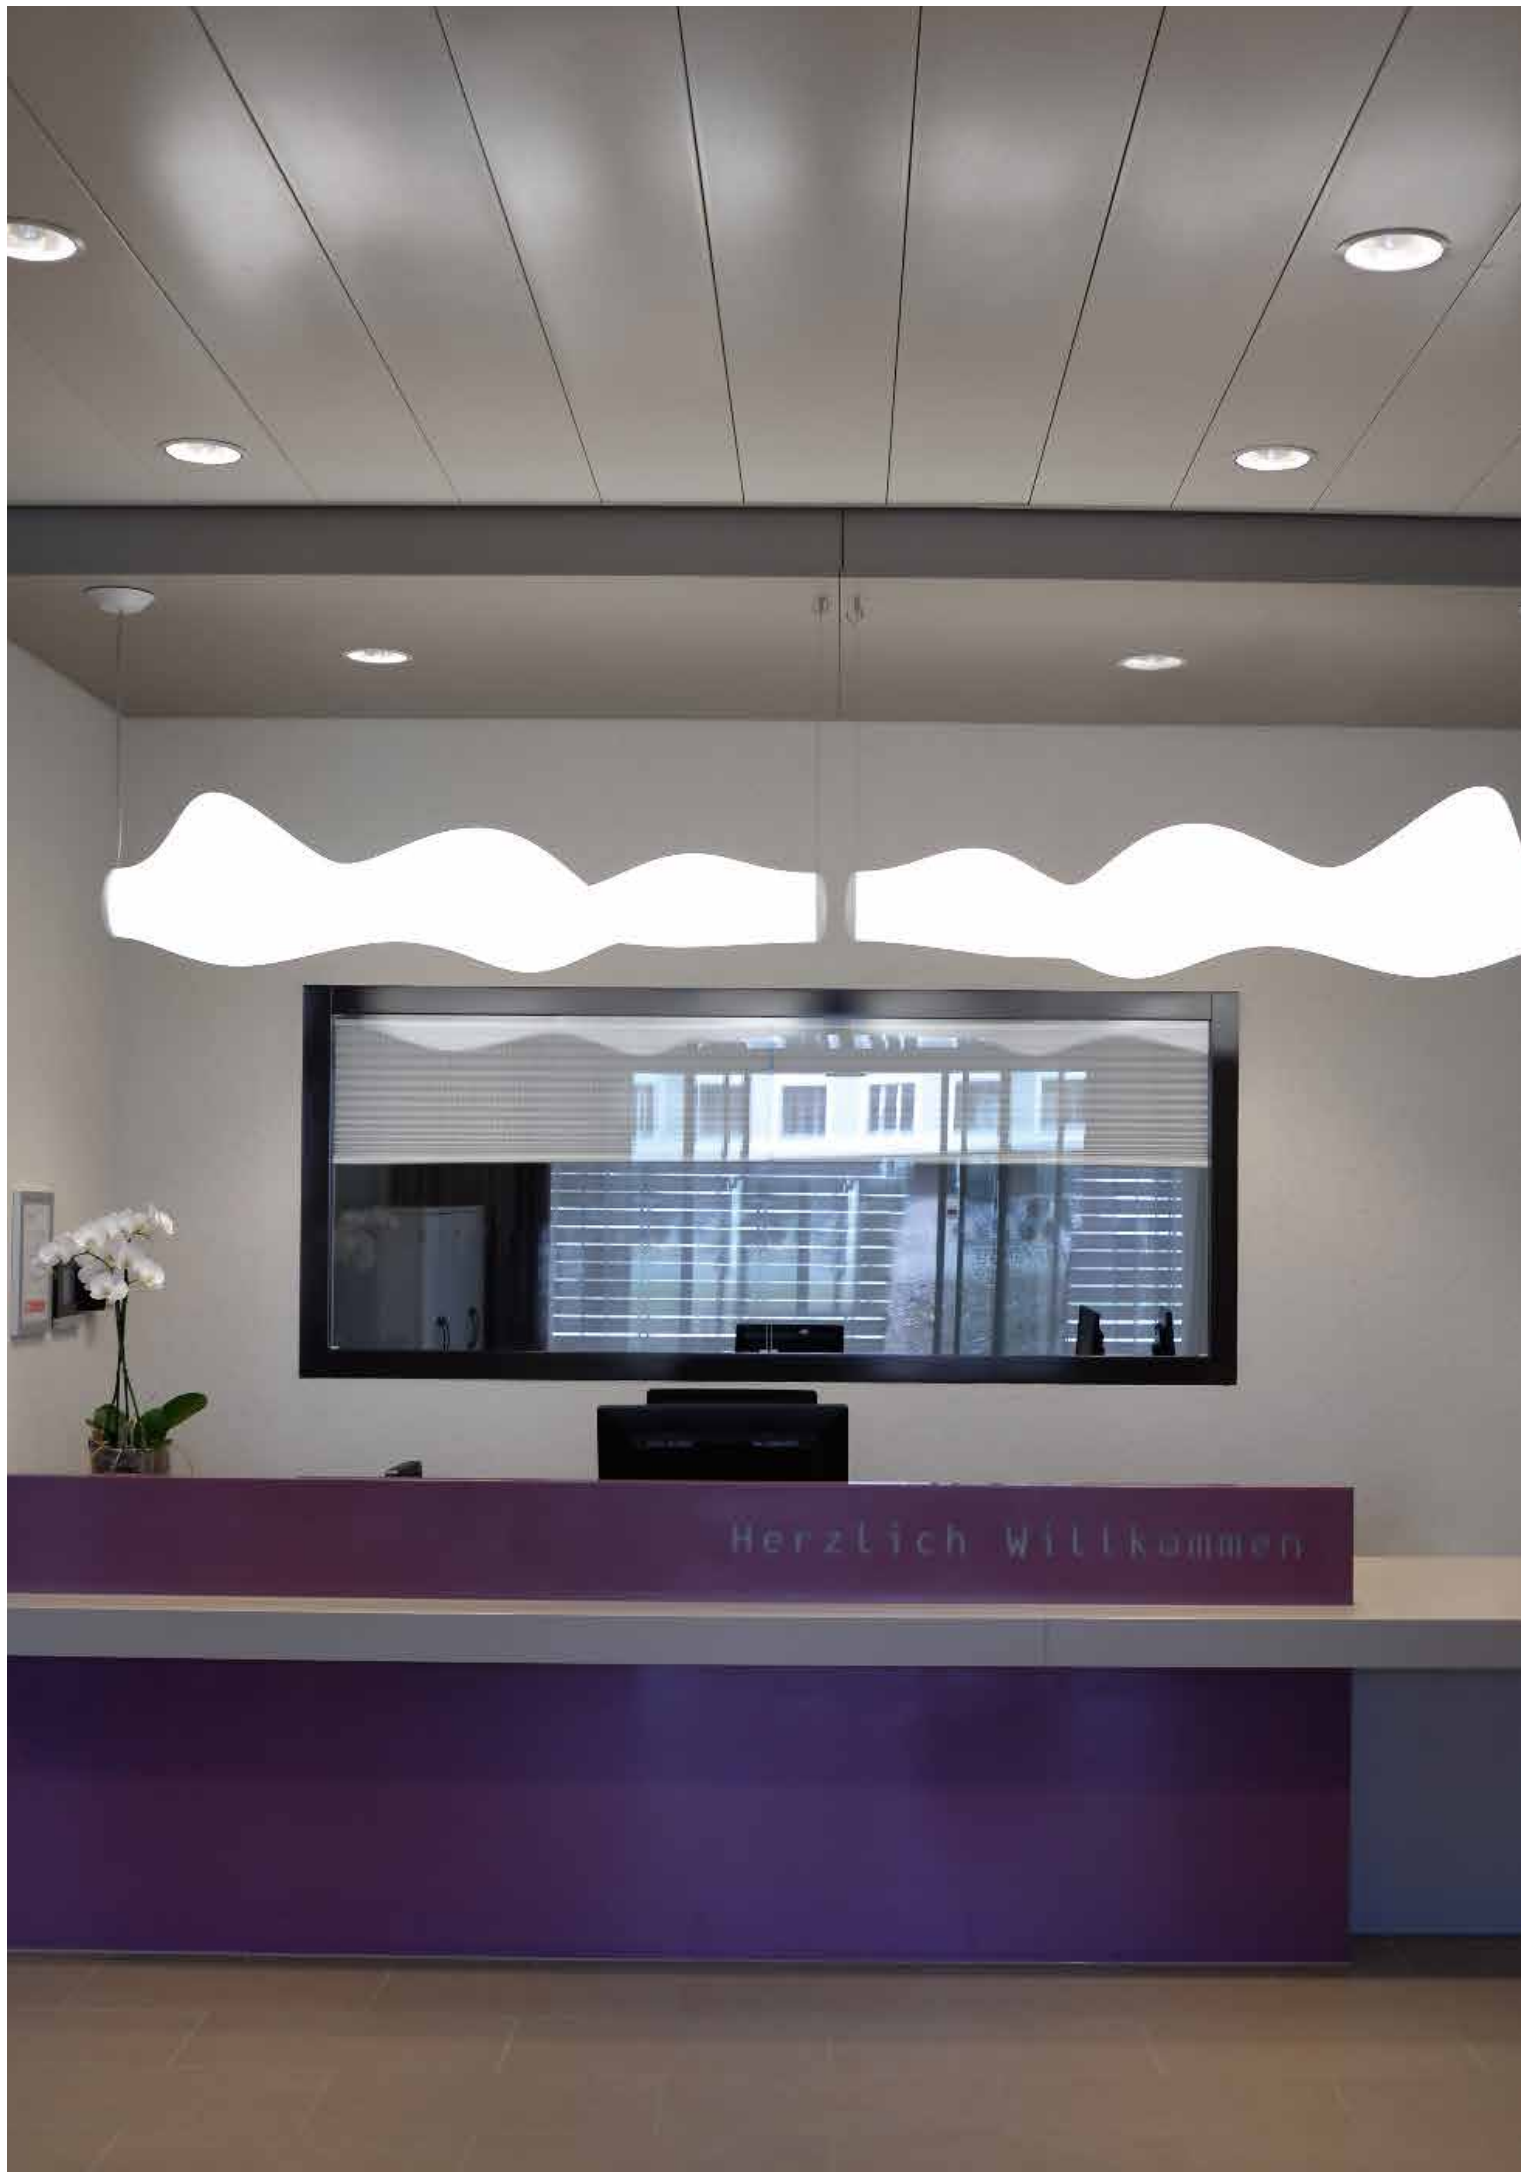

Herzlich Willkommen

STRATO 190

LED-Einbaudownlight 16 W
inklusive Driver 230 V mit
hochwertigem Aluminium-
reflektor und tiefer gesetzter
Fresnellinse, IP44

LED-recessed downlight 16 W
including driver 230 V with
high value aluminium reflector
and recessed Fresnel lens,
IP44




LED

A++-A

*

2160 Lumen

IP44





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D208	STRATO 190	white	16W LED 3000K	incl. driver	85 mm

H = Einbautiefe / recessed depth

STRATO 230

LED-Einbaudownlight 21 W
inklusive Driver 230 V mit
hochwertigem Aluminium-
reflektor und tiefer gesetzter
Fresnellinse, IP44

LED-recessed downlight 21 W
including driver 230 V with
high value aluminium reflector
and recessed Fresnel lens,
IP44




LED

A++-A

*

3600 Lumen

IP44





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D210	STRATO 230	white	21W LED 3000K	incl. driver	95 mm

H = Einbautiefe / recessed depth




VARO

LED-Einbaustrahler 34 W mit hochwertigem Aluminiumreflektor, aus massivem Aluminium, schwenkbar (2 x 20°), Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 34 W with high value aluminium reflector, made of aluminium, adjustable (2 x 20°), please order driver separately (see page 156 ff.)



3250 Lumen



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D751	VARO	white	1x34W LED 30° 3000K 900 mA	excl. driver	160 mm

H = Einbautiefe / recessed depth



SINO BAKERY
SINO MEAT

LED-Einbaustrahler 32 W mit spezieller Lichtfarbe für Bäckerei- und Fleischwaren, hocheffizientem Aluminiumreflektor, aus massivem Aluminium, Driver bitte separat bestellen (siehe Seite 156 ff.)

LED-recessed downlight 32 W with special luminous colours for bakery and meat products, high output aluminium reflector, made of aluminium, please order driver separately (see page 156 ff.)



2500K: 2200 Lumen
1750K: 2000 Lumen

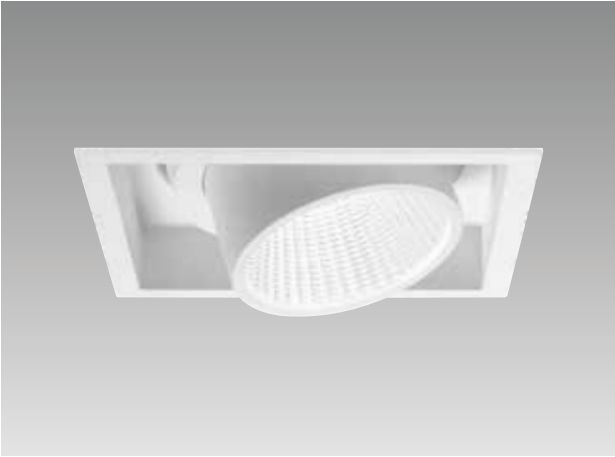

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D709	SINO BAKERY	white	1x32W LED 38° 2500K 1050 mA	excl. driver	180 mm
D710	SINO MEAT	white	1x32W LED 38° 1750K 1050 mA	excl. driver	180 mm

H = Einbautiefe / recessed depth

LED-Strahler mit spezieller Lichtfarbe für Bäckerei- und Fleischwaren
LED-spotlight with special luminous colours for bakery and meat products





KENT BAKERY / SINO BAKERY KENT MEAT / SINO MEAT



HERO

Einbaudownlight 230 V mit tiefer gesetztem, hochwertigem Spiegelreflektor, inklusive EVG

Recessed downlight 230 V with high value chrome metallized reflector, including electronic ballast





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D660	HERO	grey	2x18W/G24Q-2	incl. electr. ballast	145 mm
D661	HERO	white	2x18W/G24Q-2	incl. electr. ballast	145 mm
D662	HERO	grey	2x18W/G24Q-2	DALI dim	145 mm
D663	HERO	white	2x18W/G24Q-2	DALI dim	145 mm
D668	HERO	grey	2x18W/G24Q-2	1-10V dim	145 mm
D669	HERO	white	2x18W/G24Q-2	1-10V dim	145 mm

H = Einbautiefe / recessed depth

HERO S


Einbaudownlight 230 V mit tiefer gesetztem, hochwertigem Spiegelreflektor, inklusive EVG

Recessed downlight 230 V with high value chrome metallized reflector, including electronic ballast



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D665	HERO S	grey	1x13W/G24Q-1	incl. electr. ballast	145 mm
D666	HERO S	white	1x13W/G24Q-1	incl. electr. ballast	145 mm

H = Einbautiefe / recessed depth

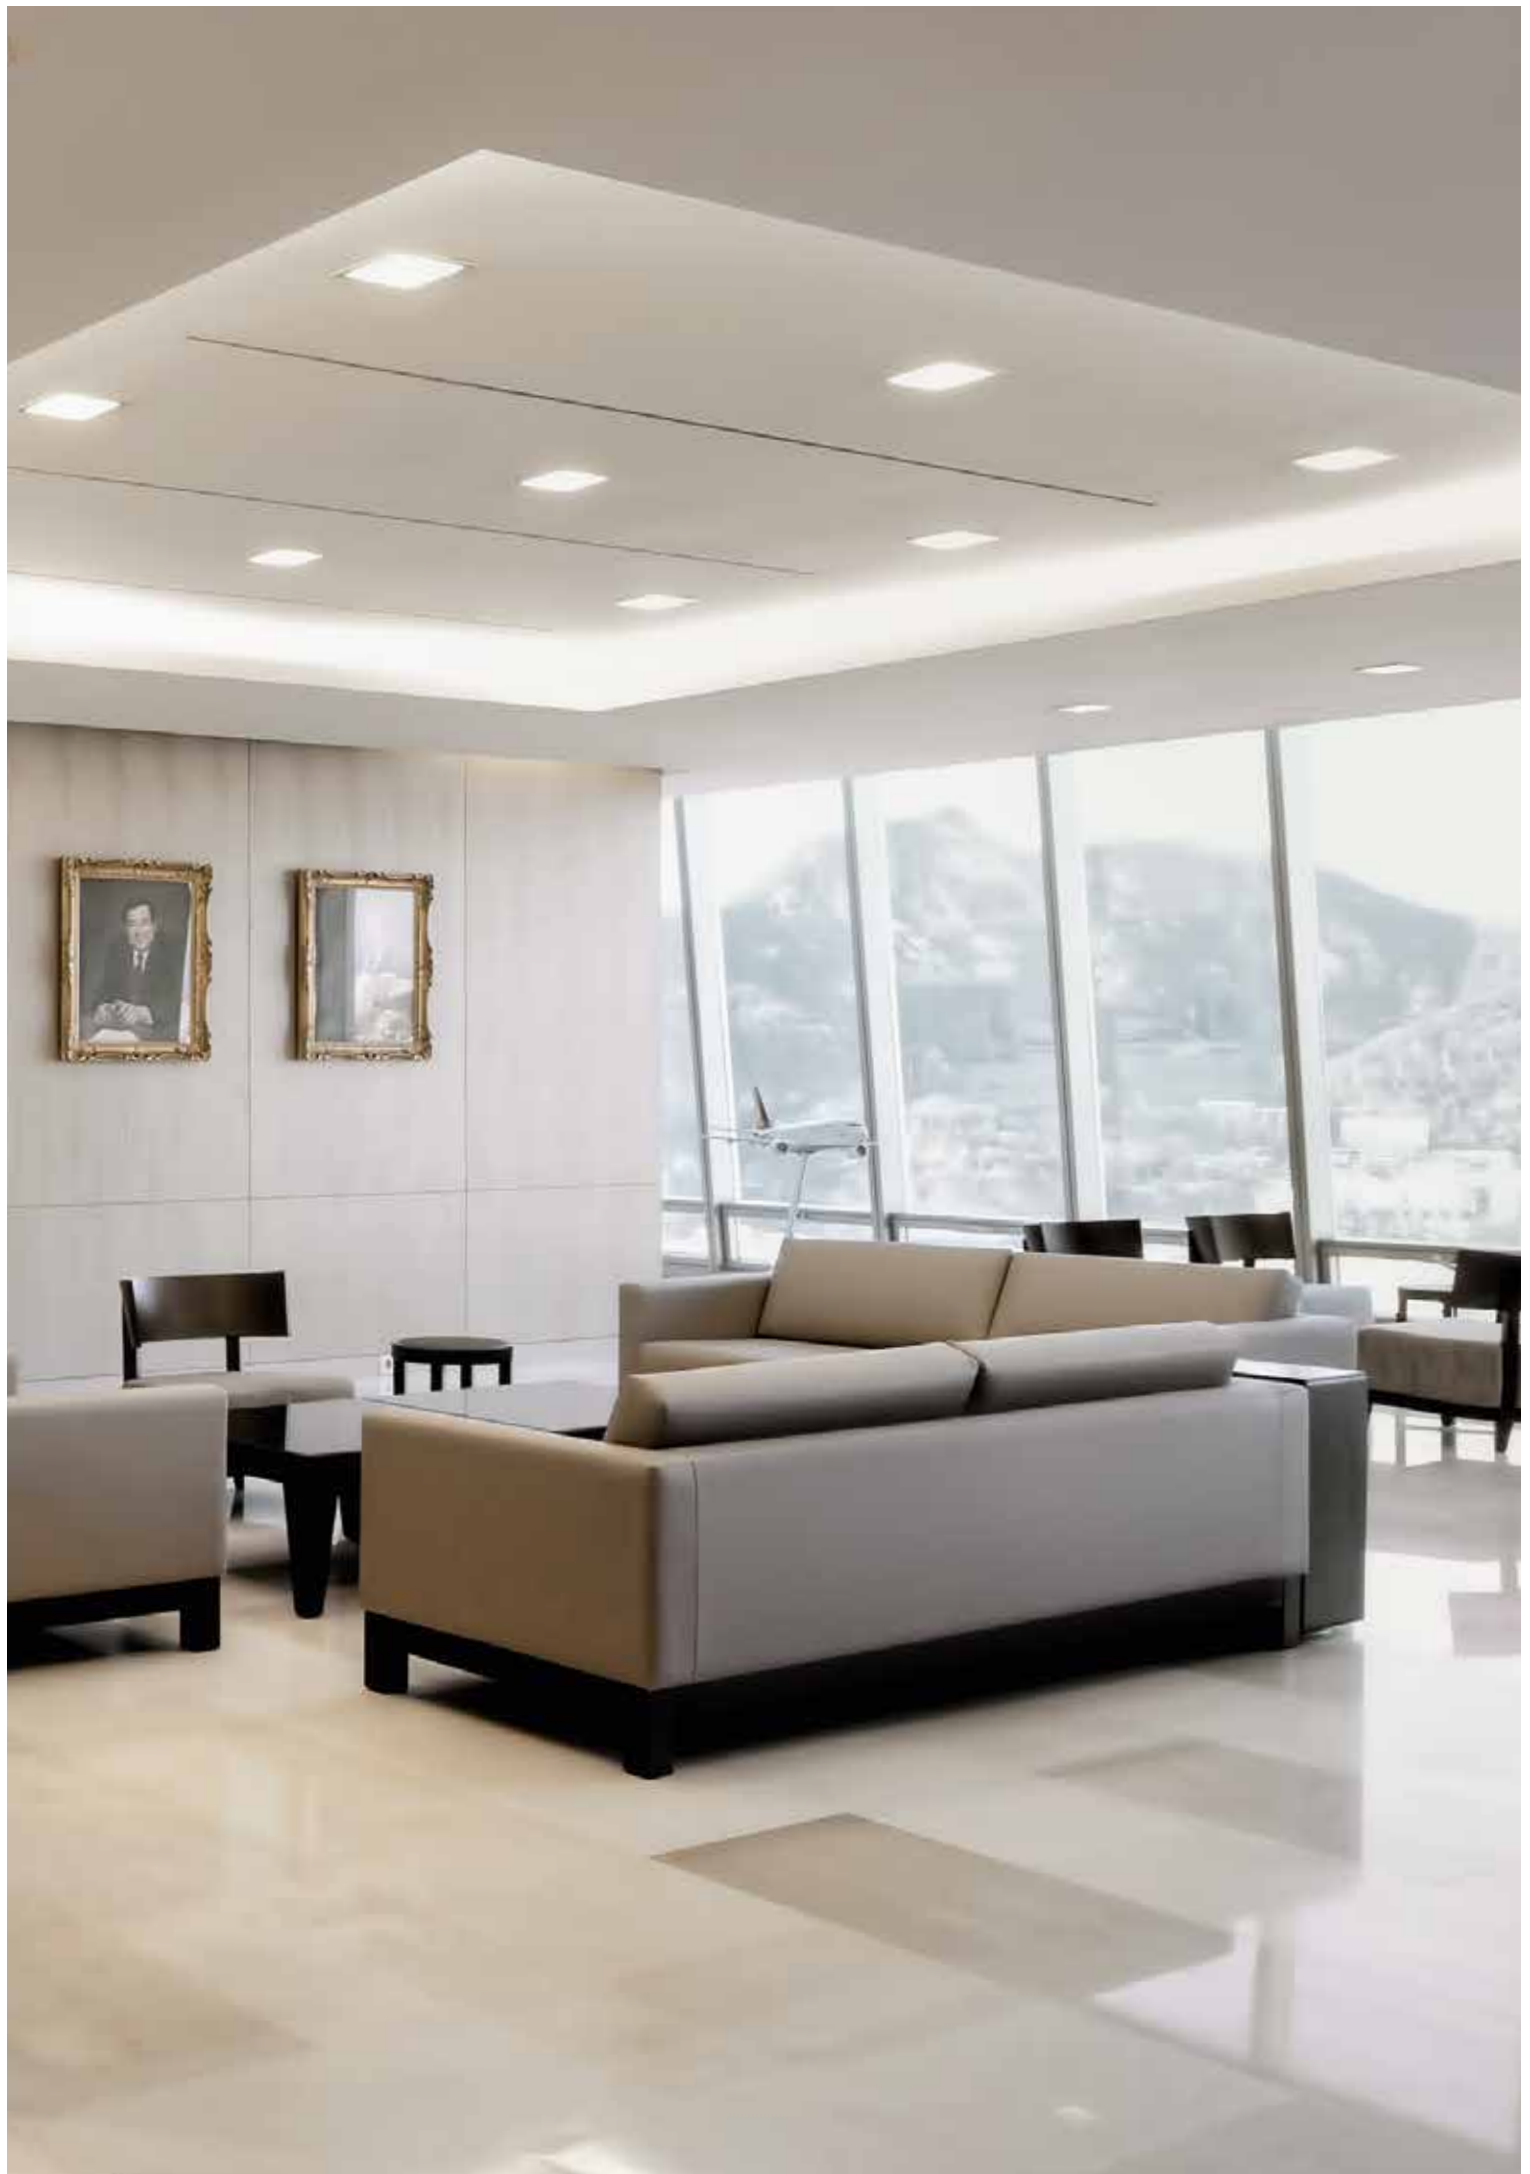

STANLEY 1

LED-Pollerleuchte 7 W aus Aluminiumguss, mit eingebautem Driver 230 V, mit einseitigem Lichtaustritt, Sondermontageplatte auf Anfrage, IP54

LED-bollard luminaire 7 W made of die-cast aluminium, with built-in driver 230 V, with one-sided light emission, special mounting plate on request, IP54




A** - A

*

540 Lumen

IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D814	STANLEY 1	grey	1x7W LED 3000K	incl. driver

STANLEY 2

LED-Pollerleuchte 7 W aus Aluminiumguss, mit eingebautem Driver 230 V, mit zweiseitigem Lichtaustritt, Sondermontageplatte auf Anfrage, IP54

LED-bollard luminaire 7 W made of die-cast aluminium, with built-in driver 230 V, with two-sided light emission, special mounting plate on request, IP54




A** - A

*

540 Lumen

IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D813	STANLEY 2	grey	1x7W LED 3000K	incl. driver


134

* Technische Informationen siehe Seite 158 | Lumenangaben sind Nominalwerte - * Technical information see page 158 | Lumen data are nominal data

OUTDOOR







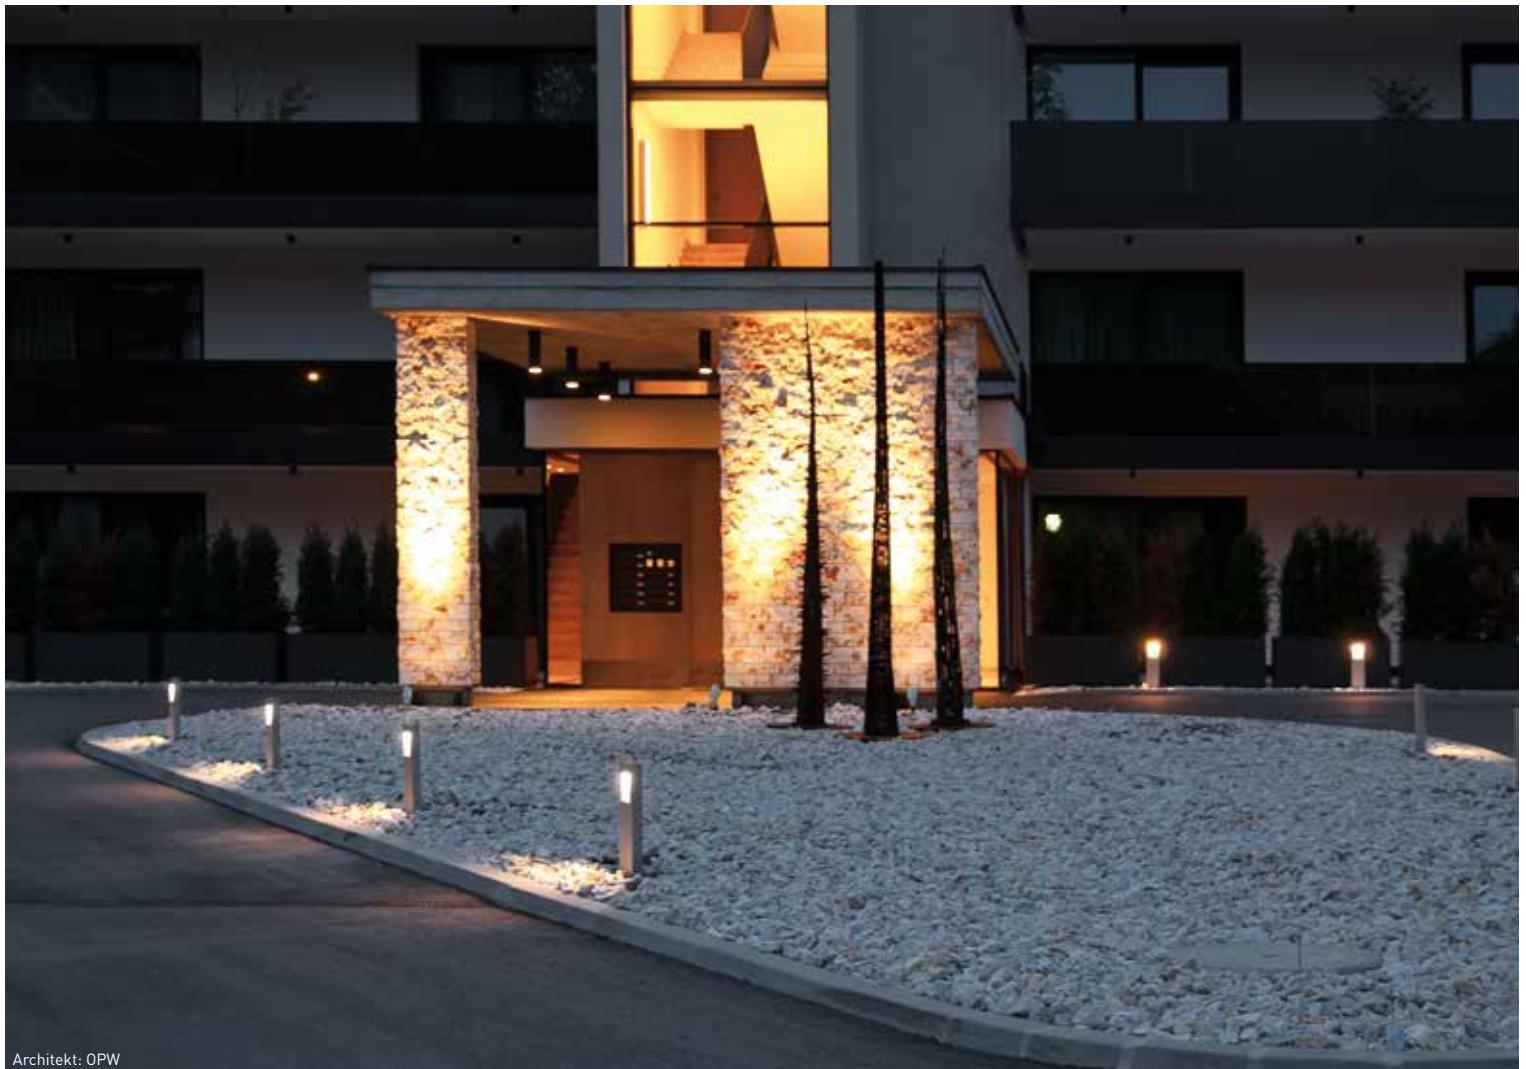

WEBSTER 400

LED-Pollerleuchte 5,4 W aus Aluminiumguss, mit zweiseitigem Lichtaustritt und eingebautem Driver 230 V, IP54

LED-bollard luminaire 5,4 W made of die-cast aluminium, with two-sided light emission and built-in driver 230 V, IP54





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D834	WEBSTER 400	grey	1x5,4W LED 3000K	incl. driver

WEBSTER 900

LED-Pollerleuchte 5,4 W aus Aluminiumguss, mit zweiseitigem Lichtaustritt und eingebautem Driver 230 V, IP54

LED-bollard luminaire 5,4 W made of die-cast aluminium, with two-sided light emission and built-in driver 230 V, IP54





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D833	WEBSTER 900	grey	1x5,4W LED 3000K	incl. driver

SYDNEY

LED-Pollerleuchte 5 W aus Aluminiumguss, mit hochwertiger Glasoptik und eingebautem Driver 230 V, IP54

LED-bollard luminaire 5 W made of die-cast aluminium, with high value optic lens and built-in driver 230 V, IP54





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D826	SYDNEY	grey	1x5W LED 3000K	incl. driver
D830	SYDNEY	graphite	1x5W LED 3000K	incl. driver



YORK 200

LED-Poller- und Wandleuchte
6 W aus Aluminiumguss, mit
hochwertiger Glasoptik und
eingebautem Driver 230 V,
IP54

LED-bollard and wall lumi-
naire 6 W made of die-cast
aluminium, with high value
optical lens and built-in driver
230 V, IP54



*
470 Lumen



IP54

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D832	YORK 200	grey	1x6W LED 3000K	incl. driver
D837	YORK 200	graphite	1x6W LED 3000K	incl. driver

YORK

LED-Pollerleuchte 6 W aus
Aluminiumguss, mit hoch-
wertiger Glasoptik und ein-
gebautem Driver 230 V, IP54



LED-bollard luminaire 6 W
made of die-cast aluminium,
with high value optic lense
and built-in driver 230 V, IP54



*
470 Lumen


IP54

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D827	YORK	grey	1x6W LED 3000K	incl. driver
D831	YORK	graphite	1x6W LED 3000K	incl. driver

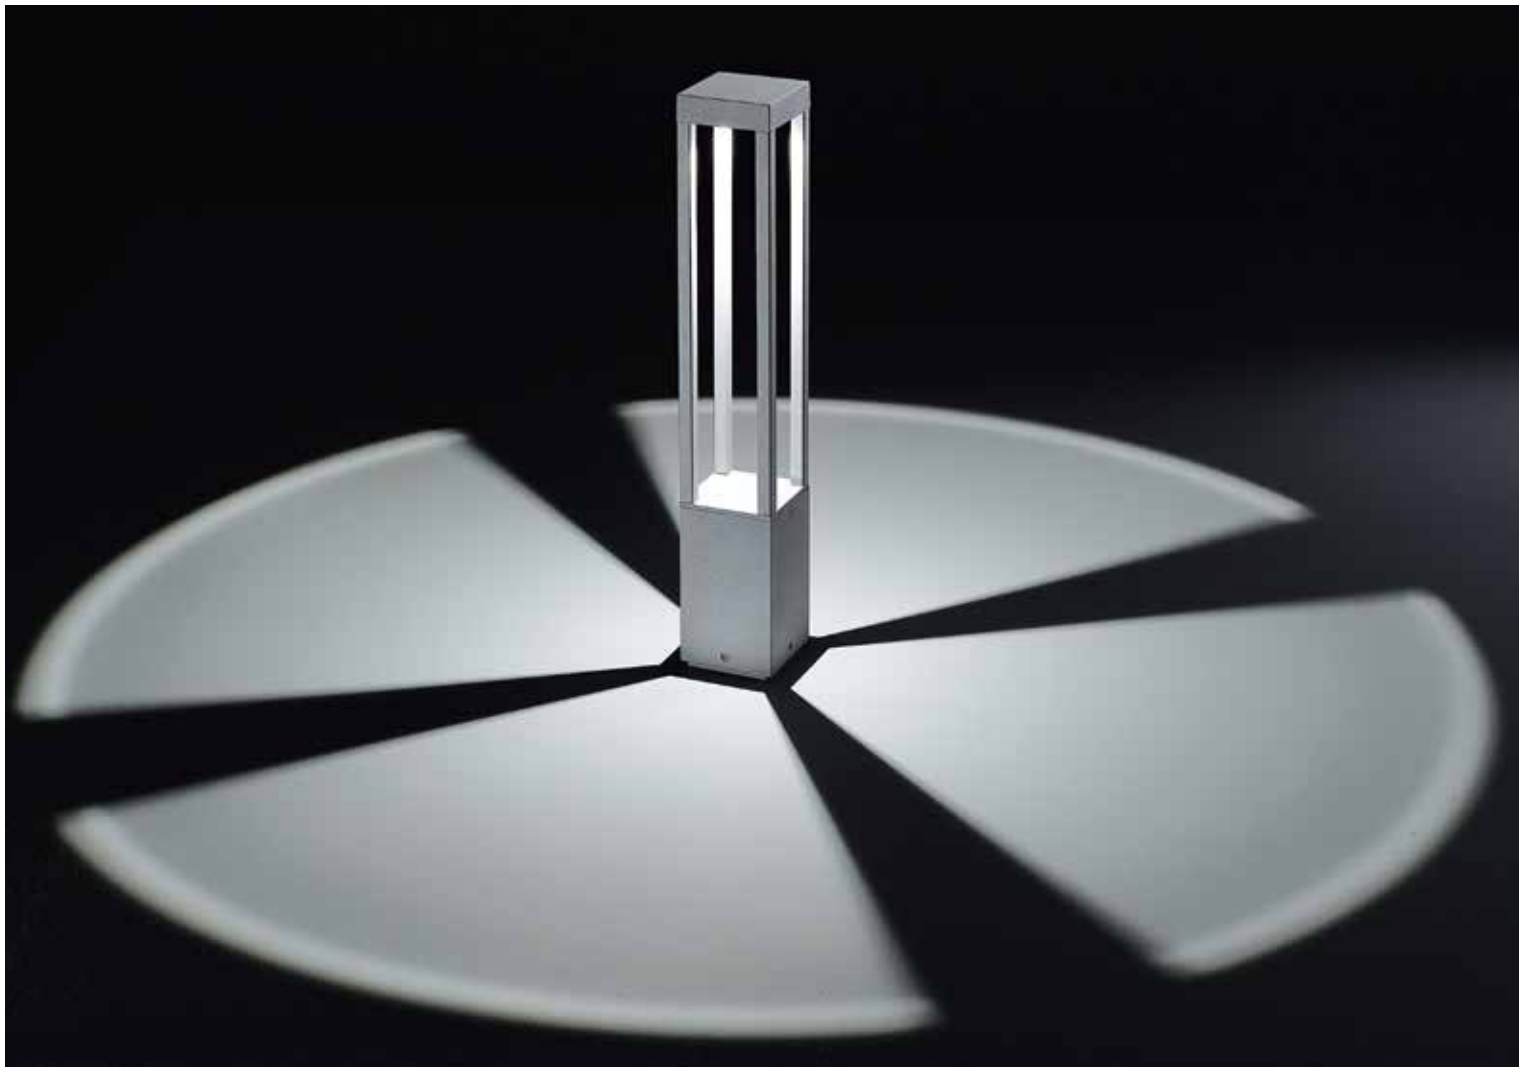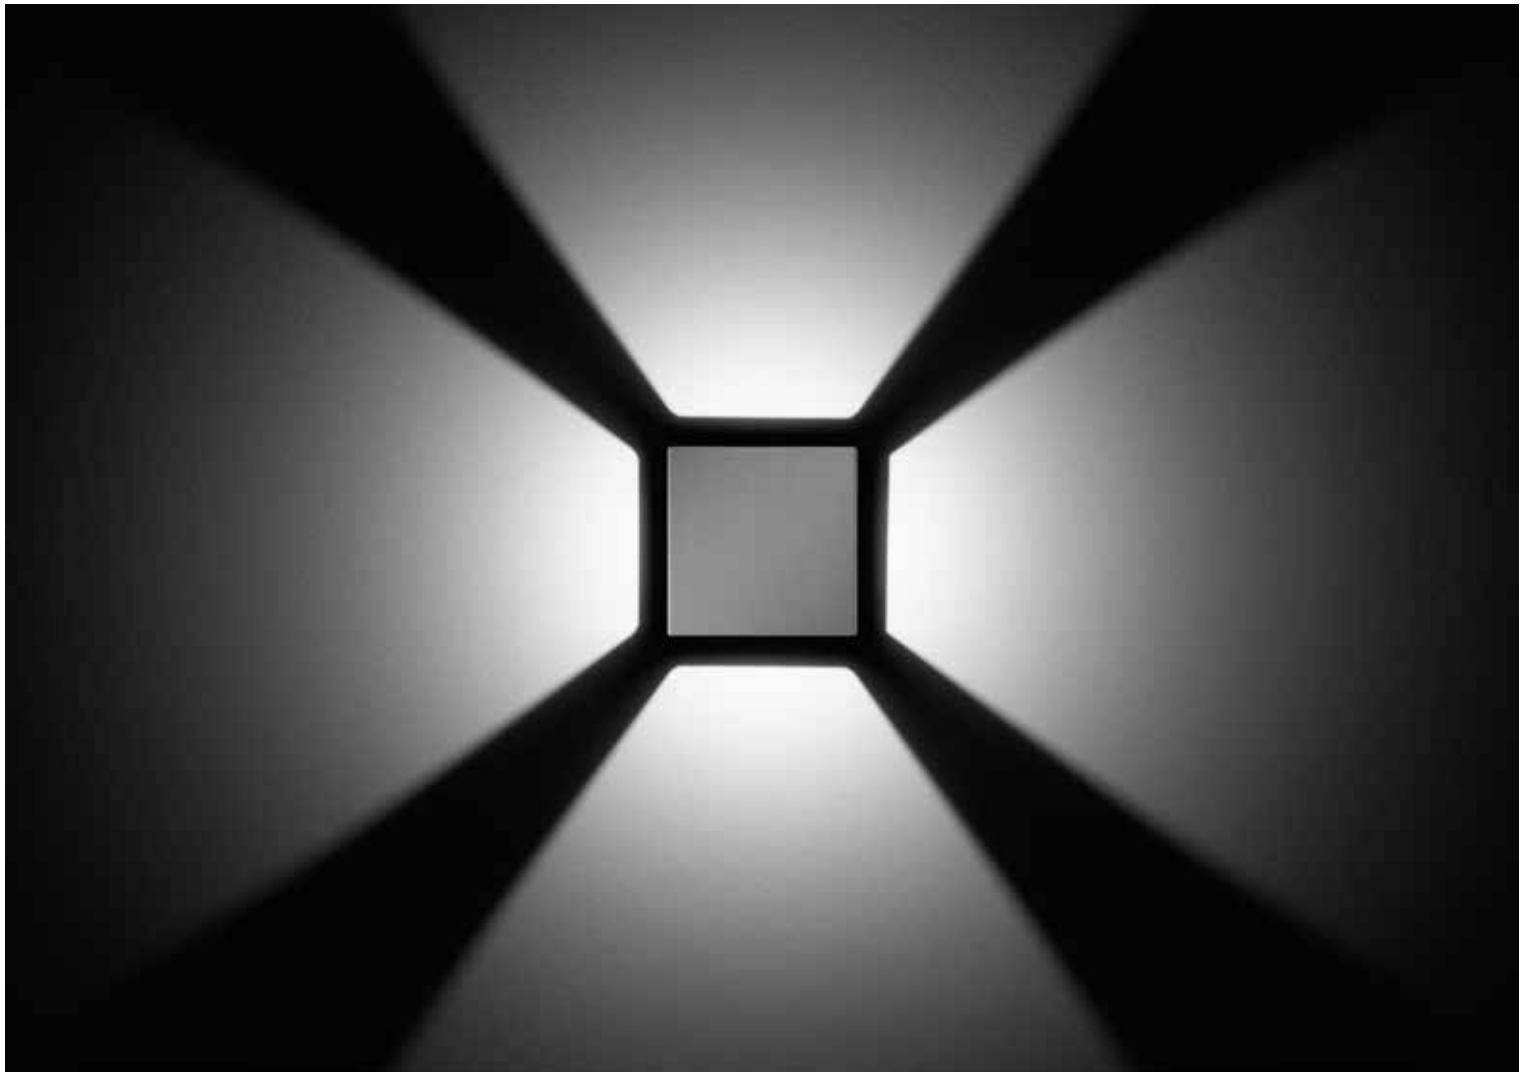

SECRET

LED-Wandleuchte 2x3 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54



LED-wall luminaire 2x3 W with built-in driver 230 V, made of extruded aluminium, for direct and indirect lighting, to be used in indoor and outdoor areas, IP54




*

A++-A

2 x 250 Lumen


IP54

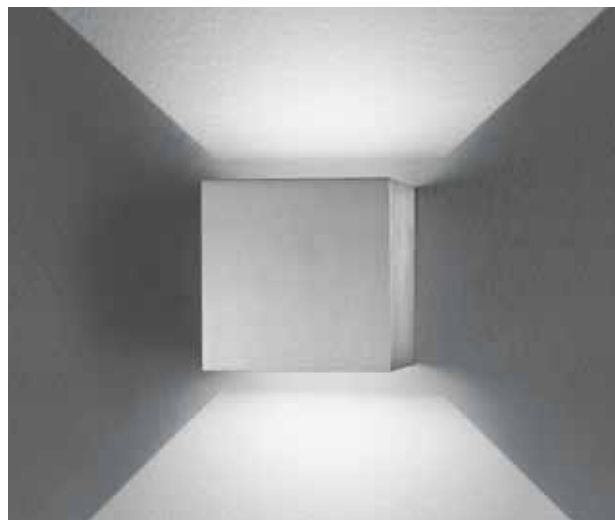

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D239	SECRET	alu	2x3W LED 3000K	incl. driver
D246	SECRET	grey	2x3W LED 3000K	incl. driver
D247	SECRET	white	2x3W LED 3000K	incl. driver

SECRET DOWN

LED-Wandleuchte 1x3 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direktbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54



LED-wall luminaire 1x3 W with built-in driver 230 V, made of extruded aluminium, for direct lighting, to be used in indoor and outdoor areas, IP54



*

A++-A

250 Lumen


IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D201	SECRET DOWN	white	1x3W LED 3000K	incl. driver
D200	SECRET DOWN	grey	1x3W LED 3000K	incl. driver

MIAMI

LED-Wandleuchte 5,4 W mit eingebautem Driver 230 V, aus stranggepresstem Aluminium, für Direkt- und Indirektbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54



LED-wall luminaire 5,4 W with built-in driver 230 V, made of extruded aluminium, for direct and indirect lighting, to be used in indoor and outdoor areas, IP54




*

A++-A

540 Lumen

IP54

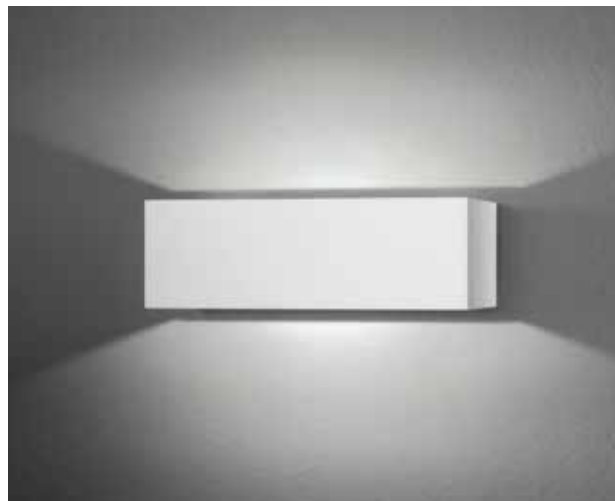

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D204	MIAMI	white	5,4W LED 3000K	incl. driver



SILENCE

LED-Wandleuchte 3 W mit eingebautem Driver 230 V, mit einseitigem Lichtaustritt, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 3 W with built-in driver 230 V, with one-sided light emission, to be used in indoor and outdoor areas, IP54



IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D220	SILENCE	white	3x1W LED 3000K	incl. driver
D221	SILENCE	grey	3x1W LED 3000K	incl. driver

FLATBOX

LED-Wandleuchte 3,6 W mit eingebautem Driver 230 V, mit einseitigem Lichtaustritt, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 3,6 W with built-in driver 230 V, with one-sided light emission, to be used in indoor and outdoor areas, IP54



IP54




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D206	FLATBOX	white	3,6W LED 3000K	incl. driver

SAXO ON

LED-Wandleuchte 2 W aus massivem Aluminium, mit eingebautem Driver 230 V, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 2 W made of aluminium, with built-in driver 230 V, to be used in indoor and outdoor areas, IP54




IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D203	SAXO ON	white	1x2W LED 3000K	incl. driver


H = Einbautiefe / recessed depth

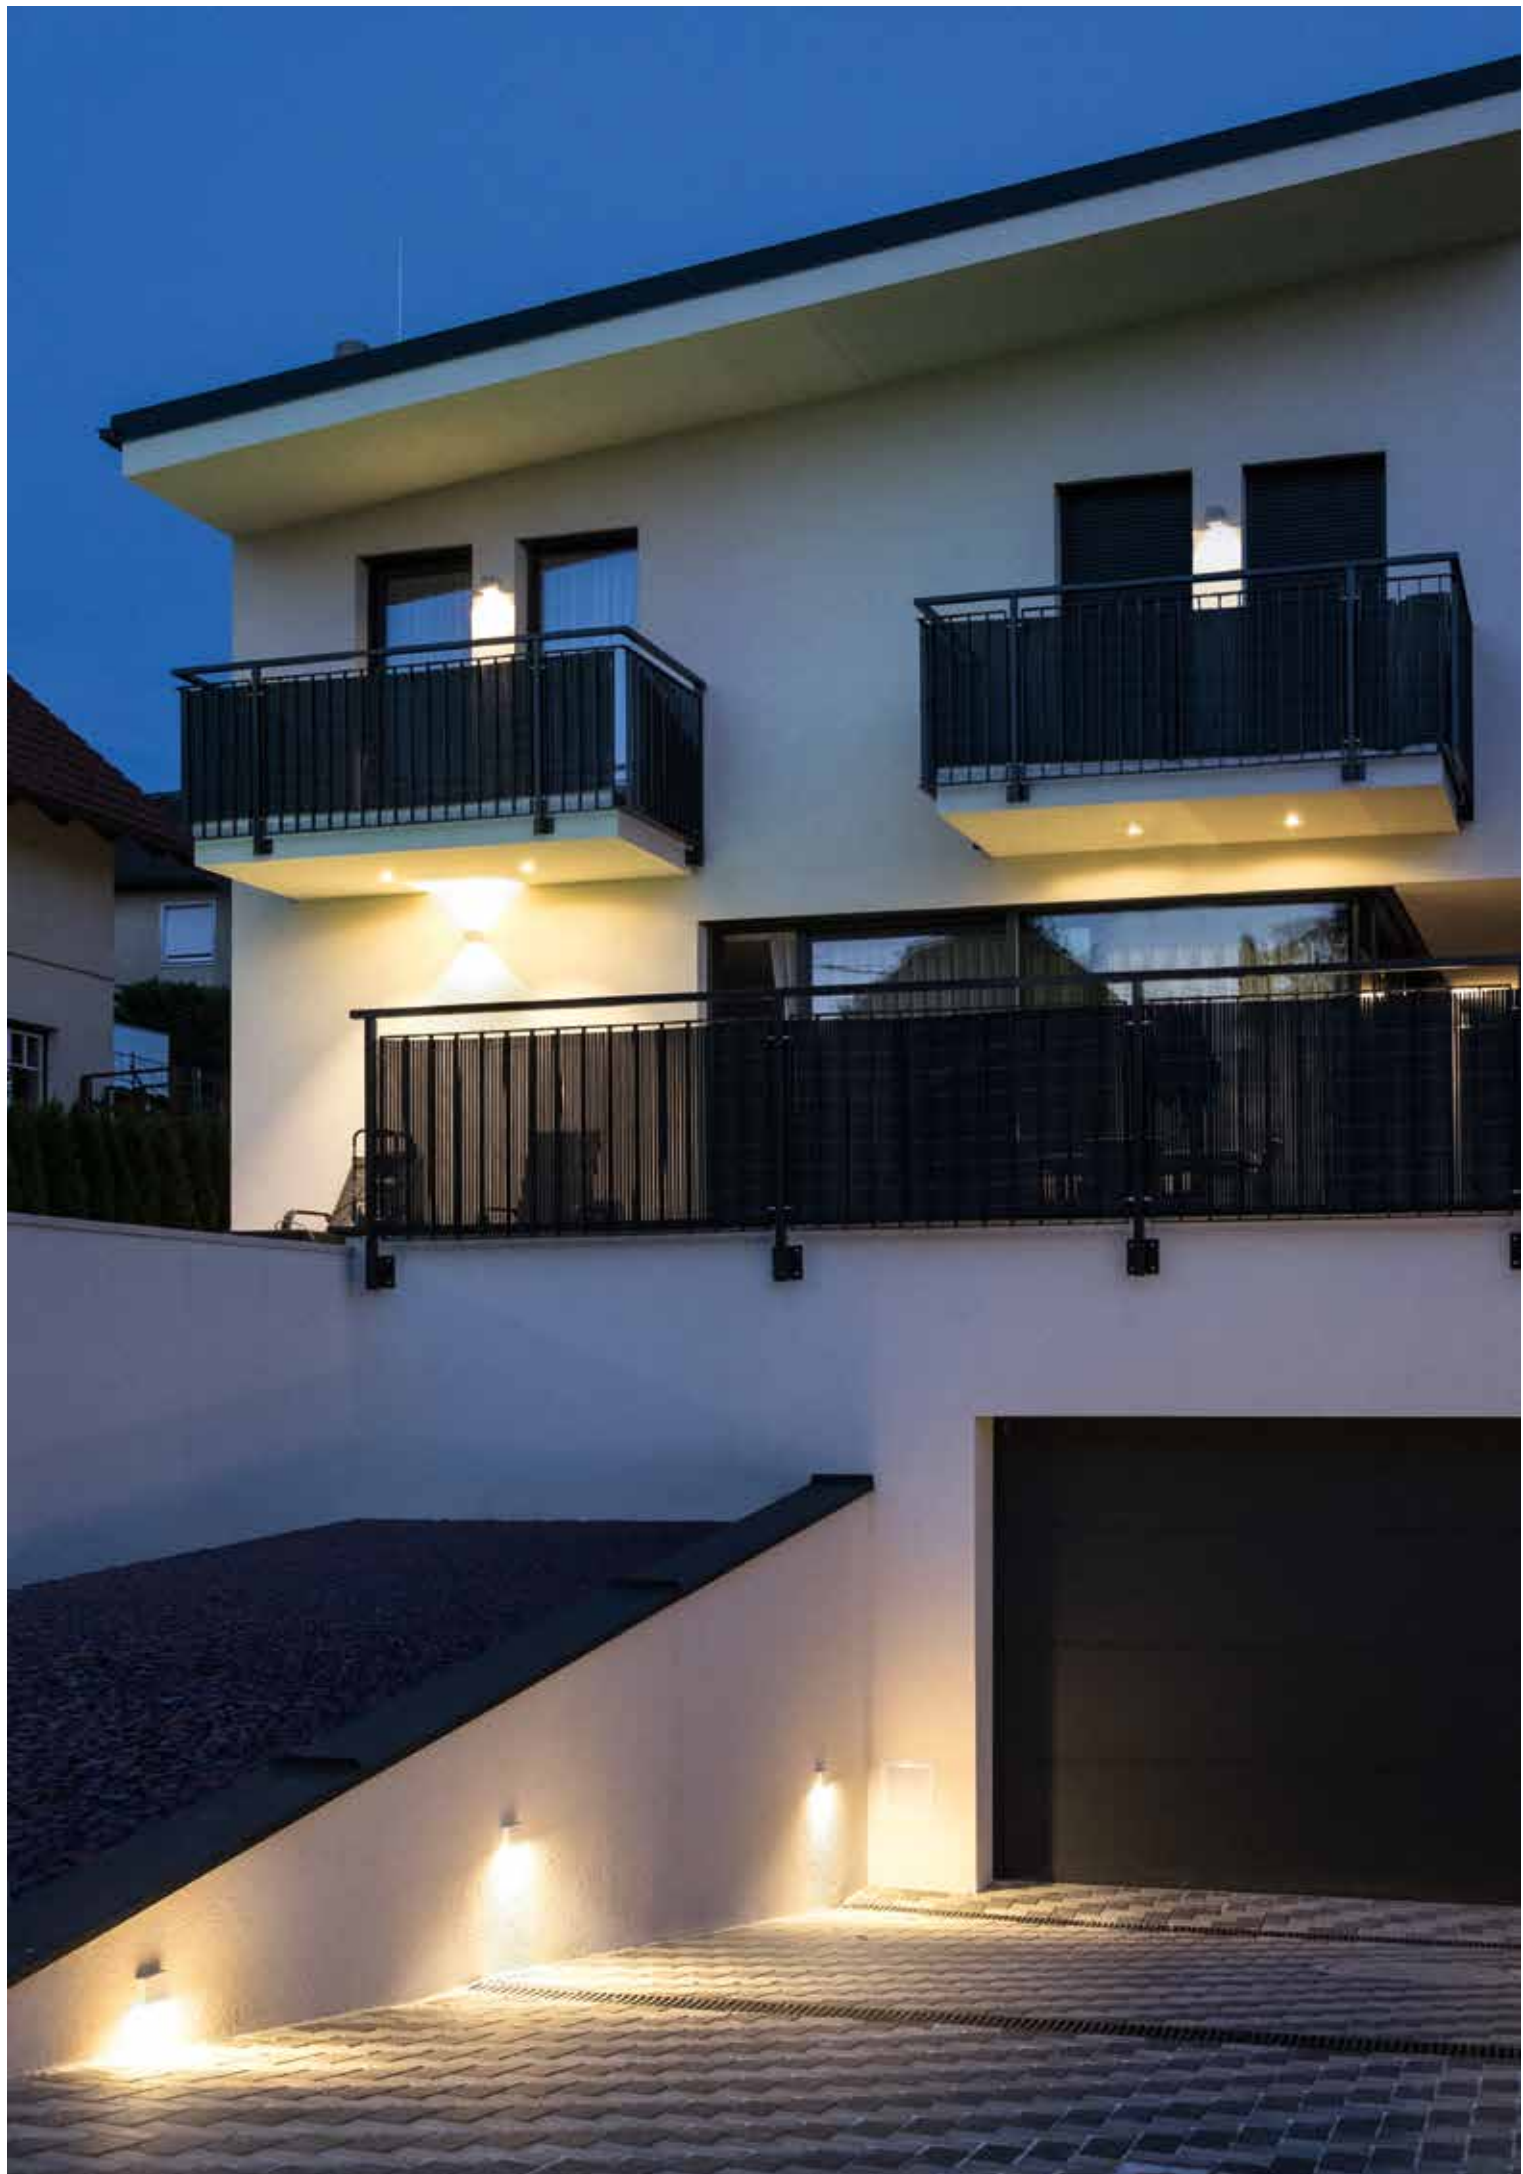

RAY

LED-Wand- und Deckenleuchte
230 V mit 10 W AC-LED, aus
massivem Aluminium natur
gebürstet, mit Glasabdeckung,
für den Innen- und Außenbereich
verwendbar, IP54

LED-wall and ceiling luminaire
230 V with 10 W AC-LED, made
of natural brushed aluminium,
with glass cover, to be used in
indoor and outdoor areas, IP54



800 Lumen

IP54


230V
LED

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D278	RAY	alu	10W LED 3000K	230 V

ELARA T

LED-Wand- und Deckenleuchte
3 W mit eingebautem Driver 230 V,
aus massivem Aluminium natur
gebürstet mit Acrylglas, für den
Innen- und Außenbereich
verwendbar, IP54

LED-wall and ceiling luminaire
3 W with built-in driver 230 V,
made of natural brushed
aluminium with acrylic glass,
to be used in indoor and outdoor
areas, IP54



148 Lumen

IP54



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D810	ELARA T	alu	1x3W LED 3000K	incl. driver



RIO

LED-Wandleuchte 2x1 W mit eingebautem Driver 230 V, aus massivem Aluminium natur gebürstet, für Direkt- und Indirektbeleuchtung, für den Innen- und Außenbereich verwendbar, IP54

LED-wall luminaire 2x1 W with built-in driver 230 V, made of natural brushed aluminium, for direct and indirect lighting, to be used in indoor and outdoor areas, IP54



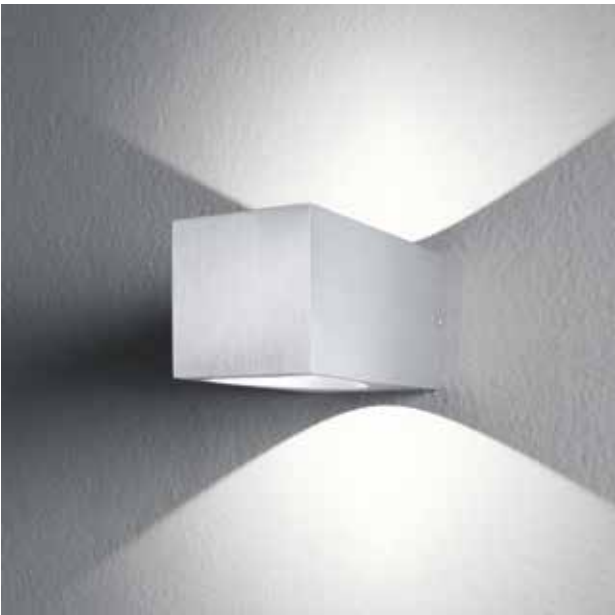



*

2x160 Lumen

IP54

CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D244	RIO	alu	2x1W LED  3000K	incl. driver






ATLANTIS 75

Außenstrahler für Halogen 230 V oder 3 W LED mit eingebautem Driver 230 V, aus massivem Aluminium natur gebürstet mit Entblendungskonus, IP65 (GU10) bzw. IP68 (LED)

Outdoor-fixture halogen 230 V or 3 W LED with built-in driver 230 V, made of natural brushed aluminium with anti glare cone, IP65 (GU10) or IP68 (LED)





LED: 240 Lumen

GU10 dim

LED IP68




CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D816	ATLANTIS 75	alu	3x1W LED 30° 3000K	incl. driver
D817	ATLANTIS 75	alu	1x35W/GU10	-

ATLANTIS 95

LED-Außenstrahler 6 W mit eingebautem Driver 230 V, aus massivem Aluminium natur gebürstet mit Entblendungskonus, IP68

LED-outdoor-fixture 6 W with built-in driver 230 V, made of natural brushed aluminium with anti glare cone, IP68





480 Lumen

IP68



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY
D815	ATLANTIS 95	alu	6x1W LED 30° 3000K	incl. driver

ACCESSORIES



Erdspieß für Außenstrahler ATLANTIS 75 und ATLANTIS 95
Ground spike for outdoor fixtures ATLANTIS 75 and ATLANTIS 95

CODE	TYPE	COLOUR
D139	ATLANTIS GROUND SPIKE	black



Montagedose für Außenstrahler ATLANTIS 75 und ATLANTIS 95
Mounting box for outdoor fixtures ATLANTIS 75 and ATLANTIS 95

CODE	TYPE	COLOUR
D138	ATLANTIS MOUNTING BOX	alu



Kleinstverteilerdose IP68 für Kabel von 6,5 bis 12 mm, 3-polig mit Klemme, B x H x T: 95 x 44 x 24 mm
Micro junction box IP68 for cable from 6,5 to 12 mm, 3-pin with terminal, W x H x D: 95 x 44 x 24 mm

CODE	TYPE	COLOUR
5625	JUNCTION BOX IP68	orange





SCOTTY 3

LED-Bodeneinbaustrahler 3 W mit Linsenoptik und eingebautem Driver 230 V, schwenkbar 2x30°, Edestahlring, inklusive Einbaugehäuse, IP67

LED-inground luminaire 3 W with optic lenses and built-in driver 230 V, adjustable 2x30°, stainless steel ring, including mounting box, IP67

A** - A

*

240 Lumen

2 x 30°
Ø115
110
Ø66
Ø101
128
101
IP67



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D821	SCOTTY 3	stainless steel	3x1W LED 20° 3000K	incl. driver	128 mm

H = Einbautiefe / recessed depth

SCOTTY 6

LED-Bodeneinbaustrahler 6 W mit Linsenoptik und eingebautem Driver 230 V, schwenkbar 2x30°, Edelstahlring, inklusive Einbaugehäuse, IP67

LED-inground luminaire 6 W with optic lenses and built-in driver 230 V, adjustable 2x30°, stainless steel ring, including mounting box, IP67

A** - A

*

480 Lumen

2 x 30°
Ø140
145
Ø90
Ø126
170
126
IP67



CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D820	SCOTTY 6	stainless steel	6x1W LED 20° 3000K	incl. driver	170 mm

H = Einbautiefe / recessed depth

FRISCO

LED-Bodeneinbaustrahler 3 W mit eingebautem Driver 230 V, schwenkbar 2x20°, Edestahlring, inklusive Einbaugehäuse, IP67

LED-inground luminaire 3 W with built-in driver 230 V, adjustable 2x20°, stainless steel ring, including mounting box, IP67

A** - A

*

270 Lumen

2 x 20°
Ø 85
130
Ø 54
Ø 77
145
77
IP67





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D825	FRISCO	stainless steel	1x3W LED 40 ° 3000K	incl. driver	145 mm

H = Einbautiefe / recessed depth

DOT

LED-Bodeneinbaustrahler
3 W inklusive Einbaugehäuse,
Driver bitte separat bestellen
(siehe Seite 156 ff.), IP67

LED-inground luminaire 3 W
including mounting box, please
order driver separately (see
page 156 ff.), IP67







CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D823	DOT	alu	1x3W LED 40° 3000K 700mA	excl. driver	90 mm
D843	DOT	black	1x3W LED 40° 3000K 700mA	excl. driver	90 mm

H = Einbautiefe / recessed depth

DOT Q

LED-Bodeneinbaustrahler
3 W inklusive Einbaugehäuse,
Driver bitte separat bestellen
(siehe Seite 156 ff.), IP67

LED-inground luminaire 3 W
including mounting box, please
order driver separately (see
page 156 ff.), IP67





CODE	TYPE	COLOUR	LAMP	POWER SUPPLY	H
D824	DOT Q	alu	1x3W LED 40° 3000K 700mA	excl. driver	90 mm

H = Einbautiefe / recessed depth

ACCESSORIES




Kleinstverteilerdose IP68 für Kabel von 6,5 bis 12 mm, 3-polig mit Klemme, B x H x T: 95 x 44 x 24 mm
Micro junction box IP68 for cable from 6,5 to 12 mm, 3-pin with terminal, W x H x D: 95 x 44 x 24 mm

CODE	TYPE	COLOUR
5625	JUNCTION BOX IP68	orange



Architekt: GDC Innenarchitektur / Foto: Andrew Phelps



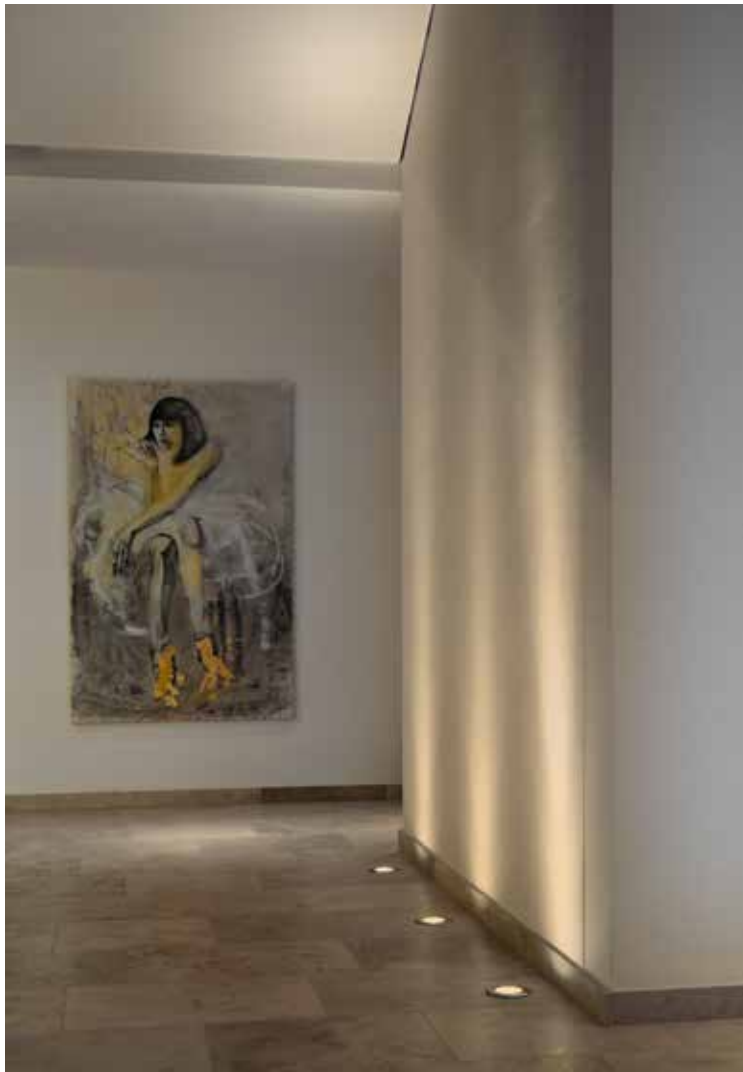

DRIVER VERWENDUNG / USE OF DRIVER

DRIVER	CC-250-09	CC-250-09-PC	CC-350-04s	CC-350-08	CC-350-13-PC	CC-350-15	CC-350-17	CC-350-18-PC	CC-500-03s	CC-500-06	CC-500-10-PC	CC-500-12	CC-500-20	CC-700-03s	CC-700-06	CC-700-10-PC	CC-700-30-DALI	CC-700-35-PC	CC-900-40	CC-1050-22	CC-1050-33	CC-UNI-DIM-20	CC-UNI-DIM-50
ALASKA											X	X	X									X	X
ALULINE 3										X		X	X									X	X
ALULINE 5												X	X									X	X
CENTRO						X		X														X	X
CENTRO XL																	X	X					X
CITY																					X		X
CITY S																				X	X		X
CITY XS																				X	(X)		
CREDO											X	X	X									X	X
DIANA			X	X		X	X																
DOT*														X	(X)	(X)						X	X
DOT Q*														X	(X)	(X)						X	X
ELARA														X	(X)	(X)						X	X
FLOW AB DS									X	X		X	X										X
FLOW AB FLEX									X	X		X	X										X
FLOW AB FLEX SWITCH									X	X		X	X										X
FRAME 100																	X	X					X
FRAME 100 DUO																	2X	2X					X
FRAME 100 ROUND																	X	X					X
FRAME 150													X									X	X
FRAME 150 DUO													2X									2X	2X
GANYMED											X	X	X									X	X
HYDRA			X	X		X	X																
IDOWN 13						X	X	X														X	X
IDOWN 26																	X	X					X
KAMEN				X	(X)	X	X															X	X
KYO											X	X	X									X	X
LEDA														X	(X)	(X)						X	X
NEXO																X	(X)					X	X
NO FRAME 100																	X	X					X
NO FRAME 100 DUO																	2X	2X					X
NO FRAME 150													X									X	X
NO FRAME 150 DUO													2X									2X	2X
NO FRAME 150 ROUND													X									X	X
PHANTOM									X	X	(X)	X	X									X	X
PIXEL			X	X		X	X															X	X
PLANE							X	X															X
PLANE S					X	X																X	X
PLUTON									X	X	(X)	X	X									X	X
PLUTON OPAL									X	X	(X)	X	X									X	X
RENA											X	X	X									X	X
ROYAL													X									X	X
ROYAL S												X	X									X	X
SINO BAKERY																					X		X
SINO MEAT																					X		X
SMILE									X	X	(X)	X	X									X	X

DRIVER VERWENDUNG / USE OF DRIVER

DRIVER	CC-250-09	CC-250-09-PC	CC-350-04s	CC-350-08	CC-350-13-PC	CC-350-15	CC-350-17	CC-350-18-PC	CC-500-03s	CC-500-06	CC-500-10-PC	CC-500-12	CC-500-20	CC-700-03s	CC-700-06	CC-700-10-PC	CC-700-30-DALI	CC-700-35-PC	CC-900-40	CC-1050-22	CC-1050-33	CC-UNI-DIM-20	CC-UNI-DIM-50
SMILE Q									X	X	(X)	X	X									X	X
TAIFUN									X	X	(X)	X	X									X	X
TWO LIGHT											X	X	X									X	X
VARO																			X				X
VULCANO				X	(X)	X		(X)														X	X
VULCANO Q					X	X		(X)														X	X
ZOOOM									X	X	(X)	X	X									X	X
ZOOOM DS									X	X		X	X										X
ZOOOM TELE									X	X		X	X										X
ZOOOM XL (EP)	X	X																				X	

* IP Driver auf Anfrage / * IP driver on request

() Mindestlast vom Driver berücksichtigen. / () Please consider the minimum load of the driver.

TECHNISCHE INFORMATIONEN DRIVER / TECHNICAL INFORMATION DRIVER

	CODE	POWER	CONSTANT CURRENT	DIMMABLE	LxWxH
DRIVER 250 mA	CC-250-09	1,5-9 W	250 mA	-	48x39x20 mm
	CC-250-09-PC	5,5-9,5 W	250 mA	PHASE CUT	Ø55x22 mm
DRIVER 350 mA	CC-350-04s	1-4 W	350 mA	-	48x26x19 mm
	CC-350-08	1-8 W	350 mA	-	68x35x21 mm
	CC-350-13-PC	6,5-13 W	350 mA	PHASE CUT	95x53x25 mm
	CC-350-15	1-15 W	350 mA	-	115x34x19 mm
	CC-350-17	1-17 W	350 mA	-	122x38x28 mm
	CC-350-18-PC	9,5-18 W	350 mA	PHASE CUT	95x53x30 mm
DRIVER 500 mA	CC-500-03s	1,5-3,5 W	500 mA	-	48x26x19 mm
	CC-500-06	2-6 W	500 mA	-	68x35x22 mm
	CC-500-10-PC	6-10 W	500 mA	PHASE CUT	85x41x22 mm
	CC-500-12	2-12 W	500 mA	-	115x34x19 mm
	CC-500-20	2-20 W	500 mA	-	122x38x28 mm
DRIVER 700 mA	CC-700-03s	1,5-3 W	700 mA	-	48x26x19 mm
	CC-700-06	3-6 W	700 mA	-	67x39x22 mm
	CC-700-10-PC	6-10 W	700 mA	PHASE CUT	85x41x22 mm
	CC-700-30-DALI	10,5-30 W	700 mA	DALI	180x32x32 mm
	CC-700-35-PC	19-35 W	700 mA	PHASE CUT	153x54x36 mm
DRIVER 900 mA	CC-900-40	20-40W	900 mA	-	167x46x30 mm
DRIVER 1050 mA	CC-1050-22	2-22 W	1050 mA	-	122x38x28 mm
	CC-1050-33	10-33 W	1050 mA	-	180x32x32 mm
DRIVER UNIVERSAL	CC-UNI-DIM-20	1-10 W	250 mA	DALI	110x52x22 mm
		1-15 W	350 mA		
		1-20 W	500 mA		
		1-20 W	700 mA		
	CC-UNI-DIM-50	1-25 W	350 mA	1-10 V DALI PUSH	125x79x22 mm
		1-35 W	500 mA		
		1-50 W	700 mA		
		1-50 W	900 mA		
		1-50 W	1050 mA		

DRIVER DIMMBAR / DRIVER DIMMABLE

1-10 V: dimmbar mit 1-10 V Driver (separate Steuerleitung notwendig) / dimmable via 1-10 V driver (separate control cable required)

DALI: dimmbar mit DALI Driver (separate Steuerleitung notwendig) / dimmable via DALI driver (separate control cable required)

PC: dimmbar mit Phasenanschnitt-/Phasenabschnittdimmer / dimmable with leading edge/trailing edge dimmer

UNI: Universalgerät, dimmbar mit 1-10 V, DALI oder PUSH (über Taster), Konstantstrom umschaltbar / universal device, dimmable via 1-10 V, DALI or PUSH (with pushbutton), constant current switchable

Weitere Drivervarianten, Driverzubehör und RGB-Steuerung auf Anfrage. Technische Änderungen vorbehalten. /

More variants of drivers, driver accessories and RGB-control on request. Technical modifications reserved.

TRANSFORMATOREN 12 V / TRANSFORMER 12 V

TRANSFORMER 70 VA

Elektronischer Sicherheitstransformator 20 - 70 VA,
kompakte Bauform, Anschlussklemme primär 2-polig / sekundär 4-polig

Electronic safety transformer 20 - 70 VA,
compact design, terminal block: 2 pole on primary side / 4 pole on secondary side

CODE	TYPE	VOLTAGE	LxWxH
HTM 70	TRANSFORMER 20-70 VA	12V / 240V	108 x 52 x 33 mm

TRANSFORMER 105 VA

Elektronischer Sicherheitstransformator 35 - 105 VA,
kompakte Bauform, Anschlussklemme primär 2-polig / sekundär 4-polig

Electronic safety transformer 35 - 105 VA,
compact design, terminal block: 2 pole on primary side / 4 pole on secondary side

CODE	TYPE	VOLTAGE	LxWxH
HTM 105	TRANSFORMER 35-105 VA	12V / 240V	108 x 52 x 33 mm

Elektronischer Sicherheitstransformator 35 - 105 VA,
für primäre Durchgangsverdrahtung, Anschlussklemme primär 4-polig / sekundär 6-polig

Electronic safety transformer 35 - 105 VA, terminal block: 4 pole on primary side / 6 pole on secondary side,
looping on primary side possible

CODE	TYPE	VOLTAGE	LxWxH
HTL 105	TRANSFORMER 35-105 VA	12V / 240V	170 x 44 x 34 mm

LEGENDE / LEGEND



Ausstrahlwinkel
beam angle



Leuchtmittel (z. B.: LED)
lamp (e.g.: LED)



Energieeffizienz (z. B.: Effizienzklasse A++ - A)
energy efficiency (e.g.: efficiency class A++ - A)



Schutzart (z. B.: IP54)
type of protection (e.g.: IP54)



Schutzklasse II
protection class II



dimmbar
dimmable



230 V AC-LED
230 V AC-LED

3000K: 2000 Lumen
4000K: 2200 Lumen

Lumenwerte sind Nominalwerte (Lichtstrom eines LED-Moduls bei 25°C Betriebstemperatur),
z. B.: für 3000K (warmweiß) / 4000K (neutralweiß). Aktuelle Lichtstromwerte und EULUMDAT auf Anfrage.
Lumen data are nominal value (luminous flux of a LED-module at 25°C operating temperature),
e.g.: for 3000K (warm white) / 4000K (neutral white). Latest luminous flux data and EULUMDAT on request.

ENERGIEEFFIZIENZ / ENERGY EFFICIENCY



Informationen zur Energieeffizienz unserer Leuchten,
gemäß den EU-Verordnungen 874/2012 und 518/2014,
finden Sie auf www.eulabel.de

Ein Teil unserer Leuchten enthält eingebaute LED-Lampen.
Die Lampen können in der Leuchte nicht ausgetauscht werden.

Information about energy efficiency of our luminaires,
according to EU regulations 874/2012 und 518/2014,
you will find on www.eulabel.de in all european languages.

A part of our luminaires contains built-in LED lamps.
These lamps cannot be changed in the luminaire.

ALPHABETICAL INDEX

TYPE	PAGE
ALASKA	110
ALULINE 3	72
ALULINE 5	72
ATLANTIS 75	150
ATLANTIS 95	150
BALI	54
BALI S	54
BIG	108
BRICK 15	4
BRICK 30	4
BRICK 30 LED	4
BRICK FLUO 24	4
BRICK FLUO 36	4
CENTRO	126
CENTRO XL	126
CHARME	12
CITY	124
CITY S	124
CITY XS	124
CL 15	52
CLIPPO	34
CONE	108
COSMO	100
CREDO	104
DEXTER	108
DIANA	74
DONUT	110
DOT	153
DOT Q	153
ELARA	114
ELARA T	146
FEELING	10
FLATBOX	20/144
FLEUR	52
FLOW AB DS	32
FLOW AB FLEX	30
FLOW AB FLEX SWITCH	30
FLOW T FLEX	28
FLOW TQ FLEX	28
FRAME 100	96
FRAME 100 DUO	96
FRAME 100 ROUND	96
FRAME 150	98
FRAME 150 DUO	98
FRISCO	152
GANYMED	100
GINGER	8
GINO	16
HANG ON	14
HANGING BALI	55
HANGING PIPER	36
HANGING PIPER dim	36
HARMONY	28
HARMONY LED FLEX	28
HENRY	8
HERO	132
HERO S	132
HYDRA	32
IDOWN 13	122
IDOWN 26	122
KAMEN	84
KENT	60
KENT S	62
KENT BAKERY	64
KENT MEAT	64
KUBUS	52
KYO	104
LEDA	74
LIGHT BOX 1	44
LIGHT BOX 2	44
LIGHT BOX 3	44
LIGHT BOX 4	45
LIGHT BOX SOFT 1	42
LIGHT BOX SOFT 2	42
LIGHT BOX SOFT 3	42
LIGHT HOUSE 1	40
LIGHT HOUSE 2	40
LILLI	58
LUCKY STAR	78
LUCY	66
LUNA ROUND	114

TYPE	PAGE
LUNA SQUARE	114
MIAMI	8/142
MK 90	106
MK 110	106
MK Q	106
NEWTON 35	50
NEWTON 55	50
NEXO	126
NO FRAME 80	88
NO FRAME 80 DUO	88
NO FRAME 80 ROUND	94
NO FRAME 100	90
NO FRAME 100 DUO	90
NO FRAME 150	92
NO FRAME 150 DUO	92
NO FRAME 150 ROUND	94
PHANTOM	116
PIPER	36
PIPER S	36
PIXEL	80
PLANE	120
PLANE S	120
PLUTON	76
PLUTON OPAL	76
RAY	146
RENA	104
RIO	148
ROY	18
ROYAL	112
ROYAL S	112
SATIS	16
SAXO	80
SAXO ON	80/144
SCOTTY 3	152
SCOTTY 6	152
SECRET	18/142
SECRET DOWN	18/142
SILENCE	20/144
SINO BAKERY	64/130
SINO MEAT	64/130
SMILE	82
SMILE Q	82
SONO	110
SPLIT	78
SQUARE	84
SQUARE DUO	84
STANLEY 1	134
STANLEY 2	134
STRATO 190	128
STRATO 230	128
STYLE DUO	48
STYLE Q	46
STYLE Q DUO	46
SUNRISE	10
SUNRISE S	10
SUPREME 14	22
SUPREME 21	22
SUPREME 28	22
SYDNEY	138
TAIFUN	116
TWO LIGHT	102
VARO	130
VERONA	12
VULCANO	118
VULCANO Q	118
WEBSTER 400	138
WEBSTER 900	138
YORK	140
YORK 200	140
ZOOOM	68
ZOOOM DS	68
ZOOOM T FLEX	24
ZOOOM TABLE	26
ZOOOM TELE	68
ZOOOM TQ FLEX	24
ZOOOM XL	38

CODE INDEX

CODE	TYPE	PAGE
131-09-00-01	ZOOOM	68
131-09-00-05	ZOOOM	68
131-09-00-33	ZOOOM	68
132-09-00-01	ZOOOM DS	68
132-09-00-05	ZOOOM DS	68
132-09-00-33	ZOOOM DS	68
133-09-00-01	ZOOOM TELE	68
133-09-00-05	ZOOOM TELE	68
133-09-00-33	ZOOOM TELE	68
134-09-00-01EP	ZOOOM XL	38
134-09-00-01T	ZOOOM XL	38
134-09-00-03EP	ZOOOM XL	38
134-09-00-03T	ZOOOM XL	38
134-09-00-05EP	ZOOOM XL	38
134-09-00-05T	ZOOOM XL	38
134-09-00-33EP	ZOOOM XL	38
134-09-00-33T	ZOOOM XL	38
135-09-00-05	ZOOOM TABLE	26
135-09-00-33	ZOOOM TABLE	26
135-09-00-41	ZOOOM TABLE	26
136-09-00-01	ZOOOM T FLEX	24
136-09-00-33	ZOOOM T FLEX	24
137-09-00-01	ZOOOM TQ FLEX	24
137-09-00-33	ZOOOM TQ FLEX	24
492-09-00-01	SMILE	82
492-09-00-03	SMILE	82
492-09-00-33	SMILE	82
493-05-00-01	HYDRA	32
493-05-00-33	HYDRA	32
493-09-00-01	HYDRA	32
493-09-00-33	HYDRA	32
5625	JUNCTION BOX IP68	150/153
591-04-27-01	DIANA	74
591-04-27-33	DIANA	74
591-05-27-01	DIANA	74
591-05-27-33	DIANA	74
591-07-27-01	DIANA	74
591-07-27-33	DIANA	74
591-09-27-01	DIANA	74
591-09-27-33	DIANA	74
591-15-27-01	DIANA	74
591-15-27-33	DIANA	74
592-04-60-01	PLUTON OPAL	76
592-04-60-33	PLUTON OPAL	76
592-05-15-01	PLUTON	76
592-05-15-33	PLUTON	76
592-05-60-01	PLUTON OPAL	76
592-05-60-33	PLUTON OPAL	76
592-07-60-01	PLUTON OPAL	76
592-07-60-33	PLUTON OPAL	76
592-09-15-01	PLUTON	76
592-09-15-33	PLUTON	76
592-09-60-01	PLUTON OPAL	76
592-09-60-33	PLUTON OPAL	76
592-15-60-01	PLUTON OPAL	76
592-15-60-33	PLUTON OPAL	76
822-09-15-01	FLOW AB DS	32
822-09-15-33	FLOW AB DS	32
833-09-15-01	FLOW TQ FLEX	28
833-09-15-33	FLOW TQ FLEX	28
842-09-15-01	FLOW AB FLEX	30
842-09-15-33	FLOW AB FLEX	30
852-09-15-01	FLOW T FLEX	28
852-09-15-33	FLOW T FLEX	28
862-09-15-01	FLOW AB FLEX SWITCH	30
862-09-15-33	FLOW AB FLEX SWITCH	30
892-09-00-03	SMILE Q	82
892-09-00-33	SMILE Q	82
9000-0128	MOUNTING BOX 28	74
9000-0130	MOUNTING BOX 30	76
9000-0136	MOUNTING BOX 36	82
9000-0230	MOUNTING SLEEVE 30	76
9000-0236	MOUNTING SLEEVE 36	82
9000-0241	MOUNTING SLEEVE 41	80
9000-0328	MOUNTING RING 28	74
9000-0336	MOUNTING RING 36	82
D111	KIT 80	88
D112	KIT 80	88
D115	KIT 80 DUO	88
D116	KIT 80 DUO	88
D117	KIT 80 ROUND	94

CODE	TYPE	PAGE
D118	KIT 80 ROUND	94
D133	STYLE MOUNTING PLATE	46/48
D134	STYLE MOUNTING PLATE	46/48
D138	ATLANTIS MOUNTING BOX	150
D139	ATLANTIS GROUND SPIKE	150
D140	KENT ANTIGLARE SHADE	60
D141	KENT SNOOT	60
D142	KENT HONEY COMB LOUVRE	60
D144	KENT S SNOOT	62
D145	KENT S HONEY COMB LOUVRE	62
D151	KIT 150	92
D152	KIT 150	92
D155	KIT 150 DUO	92
D156	KIT 150 DUO	92
D158	ANTI GLARE CONE 150	92/94/98
D159	ANTI GLARE CONE 150	92/94/98
D165	KENT LINEAR DIFFUSION	60
D166	KENT PRISMATIC DIFFUSION	60
D171	KIT 150 ROUND	94
D172	KIT 150 ROUND	94
D191	KIT 100	90
D192	KIT 100	90
D193	KIT 100 DUO	90
D194	KIT 100 DUO	90
D200	SECRET DOWN	18/142
D201	SECRET DOWN	18/142
D202	SAXO	80
D203	SAXO ON	80/144
D204	MIAMI	8/142
D205	SATIS	16
D206	FLATBOX	20/144
D208	STRATO 190	128
D210	STRATO 230	128
D211	HANGING PIPER	36
D212	CENTRO	126
D213	FRAME 100	96
D214	FRAME 100 ROUND	96
D217	COSMO	100
D218	COSMO	100
D219	COSMO	100
D220	SILENCE	20/144
D221	SILENCE	20/144
D229	PIXEL	80
D232	NEXO	126
D233	ALULINE 3	72
D234	ALULINE 3	72
D235	ALULINE 5	72
D236	ALULINE 5	72
D238	NEXO	126
D239	SECRET	18/142
D240	LUNA ROUND	114
D241	LUNA SQUARE	114
D244	RIO	148
D245	GINO	16
D246	SECRET	18/142
D247	SECRET	18/142
D248	ROYAL S	112
D249	ROYAL	112
D250	VULCANO	118
D251	VULCANO Q	118
D252	PIPER S	36
D253	PIPER	36
D255	LILLI	58
D256	CITY S	124
D257	CITY	124
D258	CENTRO XL	126
D268	PLANE S	120
D269	PLANE	120
D278	RAY	146
D279	PIXEL	80
D285	CHARME	12
D286	GINGER	8
D287	HANG ON	14
D288	HENRY	8
D289	LEDA	74
D290	LEDA	74
D291	NO FRAME 100	90
D292	NO FRAME 100	90
D293	NO FRAME 100 DUO	90
D294	NO FRAME 100 DUO	90
D297	SPLIT	78

CODE	TYPE	PAGE
D298	SPLIT	78
D299	VERONA	12
D300	STYLE DUO adapter black	48
D301	BRICK 15	4
D302	BRICK 30	4
D303	BRICK 15	4
D304	BRICK 30	4
D306	BIG	108
D307	BIG	108
D308	ROY	18
D309	ROY	18
D311	ROY	18
D312	BALI	54
D313	BALI	54
D314	BALI	54
D315	BALI	54
D316	SUNRISE S	10
D317	SUNRISE	10
D319	DONUT	110
D323	SONO	110
D324	BALI S	54
D325	BALI S	54
D326	SUNRISE S	10
D327	SUNRISE	10
D328	BALI S	54
D329	BALI S	54
D332	STYLE Q	46
D333	STYLE Q	46
D334	STYLE Q DUO	46
D335	STYLE Q DUO	46
D344	STYLE DUO	48
D349	FLEUR	52
D351	CL 15	52
D352	CL 15	52
D355	BRICK 15	4
D356	BRICK 30	4
D360	LIGHT BOX 4	45
D361	LIGHT BOX 1	44
D362	LIGHT BOX 2	44
D363	LIGHT BOX 3	44
D370	LIGHT BOX 4	45
D371	LIGHT BOX 1	44
D372	LIGHT BOX 2	44
D373	LIGHT BOX 3	44
D374	LIGHT BOX SOFT 1	42
D375	LIGHT BOX SOFT 2	42
D376	LIGHT BOX SOFT 3	42
D381	SQUARE	84
D382	SQUARE	84
D383	SQUARE DUO	84
D384	SQUARE DUO	84
D385	LIGHT BOX SOFT 1	42
D386	LIGHT BOX SOFT 2	42
D387	LIGHT BOX SOFT 3	42
D392	STYLE Q adapter black	46
D393	STYLE Q adapter white	46
D394	STYLE Q DUO adapter black	46
D395	STYLE Q DUO adapter white	46
D406	BIG	108
D407	BIG	108
D411	NO FRAME 80	88
D412	NO FRAME 80	88
D415	NO FRAME 80 DUO	88
D416	NO FRAME 80 DUO	88
D419	DONUT	110
D420	PHANTOM	116
D420-03	PHANTOM	116
D420-04	PHANTOM	116
D420-07	PHANTOM	116
D420-09	PHANTOM	116
D420-15	PHANTOM	116
D420-16	PHANTOM	116
D421	TAIFUN	116
D421-03	TAIFUN	116
D421-04	TAIFUN	116
D421-07	TAIFUN	116
D421-09	TAIFUN	116
D421-15	TAIFUN	116
D421-16	TAIFUN	116
D423	SONO	110
D430	DEXTER	108

CODE	TYPE	PAGE
D431	DEXTER	108
D432	NO FRAME 80 ROUND	94
D433	NO FRAME 80 ROUND	94
D440	CONE	108
D441	CONE	108
D442	CONE	108
D451	NO FRAME 150	92
D452	NO FRAME 150	92
D455	NO FRAME 150 DUO	92
D456	NO FRAME 150 DUO	92
D471	NO FRAME 150 ROUND	94
D472	NO FRAME 150 ROUND	94
D480	SQUARE	84
D481	SQUARE	84
D482	SQUARE DUO	84
D483	SQUARE DUO	84
D491	FRAME 150	98
D492	FRAME 150	98
D495	FRAME 150 DUO	98
D496	FRAME 150 DUO	98
D521	KUBUS	52
D522	KUBUS	52
D523	KUBUS	52
D541	NO FRAME 150 ROUND	94
D542	NO FRAME 150 ROUND	94
D561	NO FRAME 150	92
D562	NO FRAME 150	92
D565	NO FRAME 150 DUO	92
D566	NO FRAME 150 DUO	92
D581	FRAME 150	98
D582	FRAME 150	98
D585	FRAME 150 DUO	98
D586	FRAME 150 DUO	98
D601	BRICK FLUO 24	4
D602	BRICK FLUO 24	4
D603	BRICK FLUO 36	4
D604	BRICK FLUO 36	4
D625	HARMONY	28
D626	HARMONY LED FLEX	28
D640	LUNA ROUND	114
D641	LUNA SQUARE	114
D655	BRICK FLUO 24	4
D656	BRICK FLUO 36	4
D660	HERO	132
D661	HERO	132
D662	HERO	132
D663	HERO	132
D665	HERO S	132
D666	HERO S	132
D668	HERO	132
D669	HERO	132
D670	SUPREME 14	22
D671	SUPREME 21	22
D672	SUPREME 28	22
D702	SAXO	80
D709	SINO BAKERY	64/130
D710	SINO MEAT	64/130
D711	HANGING PIPER dim	36
D713	FRAME 100 DUO	96
D717	LUCY	66
D718	LUCY	66
D719	LUCY	66
D720	LUCY	66
D721	LUCY	66
D722	LUCY	66
D729	KENT	60
D730	KENT	60
D731	KENT	60
D732	KENT	60
D733	KENT	60
D734	KENT	60
D735	KENT BAKERY	64
D736	KENT BAKERY	64
D737	KENT BAKERY	64
D738	KENT BAKERY	64
D739	KENT BAKERY	64
D740	KENT BAKERY	64
D741	KENT	60
D742	KENT	60
D743	KENT	60
D744	KENT	60

CODE	TYPE	PAGE
D745	KENT	60
D746	KENT	60
D748	NEWTON 35	50
D749	MK Q	106
D751	VARO	130
D752	PIPER S dim	36
D753	PIPER dim	36
D756	BRICK 30 LED	4
D758	BRICK 30 LED	4
D765	KENT MEAT	64
D766	KENT MEAT	64
D767	KENT MEAT	64
D768	KENT MEAT	64
D769	KENT MEAT	64
D770	KENT MEAT	64
D775	CLIPPO	34
D777	CLIPPO	34
D779	GANYMED	100
D780	GANYMED	100
D781	TWO LIGHT	102
D782	TWO LIGHT	102
D784	FEELING	10
D786	MK 90	106
D787	MK 110	106
D788	NEWTON 35	50
D789	LUCKY STAR	78
D790	KAMEN	84
D791	IDOWN 13	122
D792	IDOWN 26	122
D793	CITY XS	124
D794	LIGHT HOUSE 1	40
D796	LIGHT HOUSE 2	40
D798	ALASKA	110
D810	ELARA T	146
D811	ELARA	114
D813	STANLEY 2	134
D814	STANLEY 1	134
D815	ATLANTIS 95	150
D816	ATLANTIS 75	150
D817	ATLANTIS 75	150
D820	SCOTTY 6	152
D821	SCOTTY 3	152
D823	DOT	153
D824	DOT Q	153
D825	FRISCO	152
D826	SYDNEY	138
D827	YORK	140
D830	SYDNEY	138
D831	YORK	140
D832	YORK 200	140
D833	WEBSTER 900	138
D834	WEBSTER 400	138
D837	YORK 200	140
D843	DOT	153
D851	KYO	104
D852	KYO	104
D853	KYO	104
D861	RENA	104
D862	RENA	104
D863	RENA	104
D871	CREDO	104
D872	CREDO	104
D873	CREDO	104
D902	HANGING BALI	55
D903	HANGING BALI	55
D904	HANGING BALI	55
D905	HANGING BALI	55
D911	NO FRAME 80	88
D912	NO FRAME 80	88
D915	NO FRAME 80 DUO	88
D916	NO FRAME 80 DUO	88
D930	DEXTER	108
D931	DEXTER	108
D932	NO FRAME 80 ROUND	94
D933	NO FRAME 80 ROUND	94
D940	CONE	108
D941	CONE	108
D942	CONE	108
D948	NEWTON 55	50
D956	CITY S	124
D957	CITY	124

CODE	TYPE	PAGE
D960	KENT S	62
D961	KENT S	62
D962	KENT S	62
D963	KENT S	62
D964	KENT S	62
D965	KENT S	62
D966	KENT S	62
D967	KENT S	62
D988	NEWTON 55	50
D993	CITY XS	124
D994	LIGHT HOUSE 1 dim	40
D996	LIGHT HOUSE 2 dim	40

Wir behalten uns das Recht vor, technische und formale Änderungen an unseren Produkten ohne vorherige Ankündigung vorzunehmen. Alle Maße in mm. Druckfehler vorbehalten.

All dimensions and specifications are subject to change without notice.
All dimensions in mm. Typographical errors excepted.

Copyright: bernjue, katjay, na [2x] / photocase.de (p. 64/130)
Printed in Italy by ditre.com



Ein Produkt von / a product of

EGGER Licht GmbH

Obere Tiebelgasse 7 - 9560 Feldkirchen, Austria

Tel +43 (0) 4276 55 07 - Fax +43 (0) 4276 55 07-13

office@dlsighting.com

www.dlsighting.com