

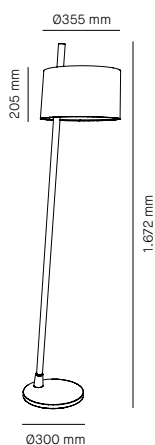


Linood

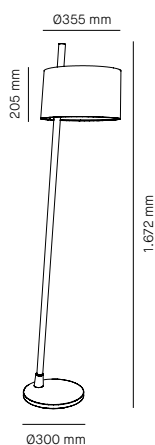

Milan

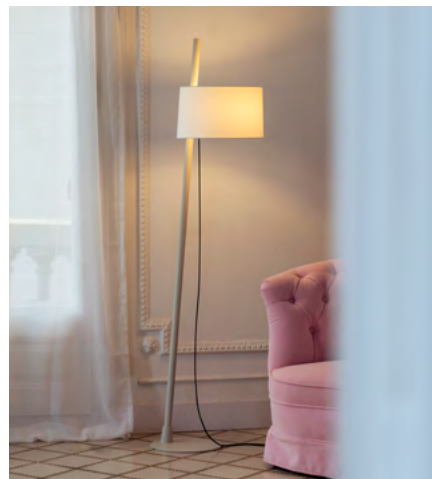


Linood 170 Wd.

Ø 355 mm | H. 1.672 mm
 1 x E27 Standard bulb retrofit 
 LED Code 2298 12 W
 1.100 lumens | 2.700 K
 Dimmable
 Class II: Basic insulate plus reinforced insulation

Finishes

6769+3769 ● Oak wood

Linood 170 Met.

Ø 355 mm | H. 1.672 mm
 1 x E27 Standard bulb retrofit 
 LED Code 2298 12 W
 1.100 lumens | 2.700 K
 Dimmable
 Class II: Basic insulate plus reinforced insulation

Finishes

6901+3901 ● Matt black lacquering (RAL 9005).
 6902+3902 ● Mink lacquering (NCS S 2005-Y10R).

DOWNLOADS

[Linood](#)

3D Files

[6769+3769](#)
[6901+3901](#)
[6902+3902](#)

3D Max Files

[6769+3769](#)
[6901+3901](#)
[6902+3902](#)

Assembly instructions

[6769+3769](#)
[6901+3901](#)
[6902+3902](#)

Photometric curve

[6769+3769](#)
[6901+3901](#)
[6902+3902](#)

Economic efficiency index

[6769+3769](#)
[6901+3901](#)
[6902+3902](#)


Una combinación cálida e intimista

LINOOD 170 WD

Floor lamp with tube and base in varnished oak. Shade in 100% linen with a rigid PVC film structure and adjustable height. Built-in switch on lamp-holder.


LINOOD 170 MET

Floor lamp with tube and base, finished in matt black lacquer (RAL 9005) and mink lacquer (NCS S 2005- Y10R). Shade in raw "dreams" material (100 % Poliester) with a rigid PVC film structure and adjustable height. Built-in switch on lamp-holder.

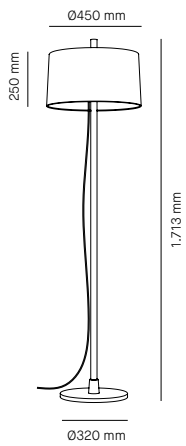

Linood 170 Met.

Ø 450 mm | H. 1.713 mm

3 x E27 Standard bulb retrofit 

LED Code 2298 12 W

1.100 lumens (x3) | 2.700 K

Dimmable

Class II: Basic insulate plus reinforced insulation

Finishes

6903+3903 ● Oak wood

DOWNLOADS

[Linood](#)

3D Files

[6903+3903](#)

3D Max Files

[6903+3903](#)

Assembly instructions

[6903+3903](#)

Photometric curve

[6903+3903](#)

Economic efficiency index

[6903+3903](#)

Floor lamp with tube and base in varnished oak. Shade in 100% linen with a rigid PVC film structure. Built-in switch on lamp-holder.